

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any lange of the applicatio customer's to unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the



NC7SZ02 TinyLogic[®] UHS Two-Input NOR Gate

Features

FAIRCHILD

- Ultra-High Speed: t_{PD} 2.4ns (Typical) into 50pF at 5V V_{CC}
- High Output Drive: ±24mA at 3V V_{CC}
- Broad V_{CC} Operating Range: 1.65V to 5.5V
- Matches Performance of LCX Operated at 3.3V V_{CC}
- Power Down High-Impedance Inputs/Outputs
- Over-Voltage Tolerance Inputs Facilitate 5V to 3V Translation
- Proprietary Noise/EMI Reduction Circuitry
- Ultra-Small MicroPak[™] Packages

Ordering Information


Space-Saving SOT23 and SC70 Packages

Description

The NC7SZ02 is a single two-input NOR gate from Fairchild's Ultra-High Speed (UHS) series of TinyLogic[®]. The device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive while maintaining low static power dissipation over a broad V_{CC} operating range. The device is specified to operate over the 1.65V to 5.5V V_{CC} operating range. The inputs and output are high-impedance when V_{CC} is 0V. Inputs tolerate voltages up to 6V, independent of V_{CC} operating voltage.

Part Number	Top Mark	Package	Packing Method
NC7SZ02M5X	7Z02	5-Lead SOT23, JEDEC MO-178 1.6mm	3000 Units on Tape & Reel
NC7SZ02P5X	Z02	5-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3000 Units on Tape & Reel
NC7SZ02L6X	JJ	6-Lead MicroPak™, 1.00mm Wide	5000 Units on Tape & Reel
NC7SZ02FHX	JJ	6-Lead, MicroPak2™, 1x1mm Body, .35mm Pitch	5000 Units on Tape & Reel

© 1996 Fairchild Semiconductor Corporation

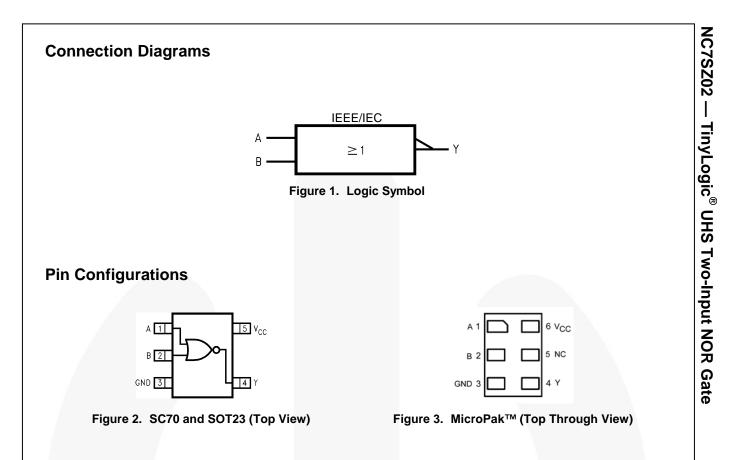

Pin Definitions

Pin # SC70 / SOT23	C70 / SOT23 Pin # MicroPak™ Name		Description
1	1	A	Input
2	2	В	Input
3	3	GND	Ground
4	4	4 Y Output	
5	6	V _{cc}	Supply Voltage
	5	NC	No Connect

Function Table

Y= /A +/B

Inp	outs	Output
A	В	Y
L	L	Н
L	Н	L
Н	L	L
Н	Н	L

H = HIGH Logic Level

L = LOW Logic Level

NC7SZ02 — TinyLogic[®] UHS Two-Input NOR Gate

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Para	ameter	Min.	Max.	Unit
V _{CC}	Supply Voltage		-0.5	6.0	V
V _{IN}	DC Input Voltage		-0.5	6.0	V
V _{OUT}	DC Output Voltage		-0.5	6.0	V
l	DC Input Diada Current	V _{IN} < -0.5V		-50	mA
IΙΚ	IIK DC Input Diode Current	$V_{IN} > 6.0V$		+20	
I	DC Output Diada Current	V _{OUT} < -0.5V		-50	~ ^
loκ	DC Output Diode Current	$V_{OUT} > 6V, V_{CC}=GND$		+20	mA
lout	DC Output Current			±50	mA
I_{CC} or I_{GND}	DC V _{CC} or Ground Current			±50	mA
T _{STG}	Storage Temperature Range		-65	+150	°C
TJ	Junction Temperature Under B	ias		+150	°C
TL	Junction Lead Temperature (Se	oldering, 10 Seconds)		+260	°C
		SOT-23		200	
P	Devuer Dissinction at + 95%	SC70-5		150	
PD	Power Dissipation at +85°C	MicroPak [™] -6		130	– mW
		MicroPak2 [™] -6		120	
ESD	Human Body Model, JEDEC:JE	SD22-A114		4000	v
ESD	Charge Device Model, JEDEC:	JESD22-C101		2000	V

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Conditions	Min.	Max.	Unit
N/	Supply Voltage Operating		1.65	5.50	V
V _{cc}	Supply Voltage Data Retention		1.5	5.5	v
V _{IN}	Input Voltage		0	5.5	V
Vout	Output Voltage		0	Vcc	V
T _A	Operating Temperature		-40	+85	°C
		V _{CC} at 1.8V, 2.5V ±0.2V	0	20	$<$ \cup
t _r , t _f	Input Rise and Fall Times	V _{CC} at 3.3V ± 0.3V	0	10	ns/V
		V _{CC} at 5.0V ± 0.5V	0	5	
		SOT-23		300	
0	The med Decistor of	SC70-5		425	_ ∘c/w
θ_{JA}	Thermal Resistance	MicroPak [™] -6		500	
		MicroPak2 [™] -6		560	1

Note:


1. Unused inputs must be held HIGH or LOW. They may not float.

Symbol Parameter	D		•	T _A =25°C			T _A =-40 to +85°C		
	V _{cc}	Conditions	Min.	Тур.	Max.	Min.	Max.	Unit	
	HIGH Level Input	1.65 to 1.95		0.75V _{CC}			$0.75V_{CC}$		
VIH	Voltage	2.30 to 5.50		0.70V _{CC}			$0.70V_{CC}$		V
	LOW Level Input	1.65 to 1.95				$0.25V_{CC}$		$0.25V_{CC}$	Ň
V _{IL}	Voltage	2.30 to 5.50				0.30V _{CC}		0.30V _{CC}	V
		1.65		1.55	1.65		1.55		
		1.80		1.70	1.80		1.70		
	3.0 HIGH Level Output 4.5	2.30	V _{IN} =V _{IL} I _{OH} =-100µA	2.20	2.30		2.20		
		3.00		2.90	3.00		2.90		
V		4.50		4.40	4.50		4.40		V
V _{OH}		1.65	I _{OH} =-4mA	1.29	1.52		1.29		
		2.30	I _{OH} =-8mA	1.90	2.15	E.	1.90		
		3.00	I _{OH} =-16mA	2.40	2.80		2.40		
		3.00	I _{OH} =-24mA	2.30	2.68		2.30		
	3.5	4.50	I _{OH} =-32mA	3.80	4.20		3.80		
		1.65			0.00	0.10		0.10	
		1.80			0.00	0.10		0.10	
		2.30	V _{IN} =V _{IH} I _{OL} =100µA		0.00	0.10		0.10	
		3.00	10L-100p/1		0.00	0.10		0.10	
	LOW Level Output	4.50			0.00	0.10		0.10	V
V _{OL}	Voltage	1.65	I _{OL} =4mA		0.08	0.24		0.24	V
		2.30	I _{OL} =8mA		0.10	0.30		0.30	
		3.00	I _{OL} =16mA		0.15	0.40		0.40	
		3.00	I _{OL} =24mA		0.22	0.55		0.55	
		4.50	I _{OL} =32mA		0.22	0.55		0.55	
I _{IN}	Input Leakage Current	0 to 5.5	V _{IN} =5.5V, GND			±1		±10	μA
IOFF	Power Off Leakage Current	0	V_{IN} or V_{OUT} =5.5V			1		10	μA
I _{CC}	Quiescent Supply Current	1.65 to 5.50	V _{IN} =5.5V, GND			2.0		20	μA

0		N	Conditions	T _A =25°C			T _A =-40 to +85°C		11	
Symbol	Parameter	V _{cc}		Min.	Тур.	Max.	Min.	Max.	Units	Figure
		1.65		2.0	5.3	11.5	2.0	12.0		
		1.80		2.0	4.4	9.5	2.0	10.0		
		2.50 ± 0.20	C _L =15pF, R _I =1MΩ	0.8	2.9	6.5	0.8	7.0		
t _{PLH} , t _{PHL}	Propagation Delay	3.30 ± 0.30		0.5	2.3	4.5	0.5	4.7	ns	Figure 4 Figure 5
		5.00 ± 0.50		0.5	1.9	3.9	0.5	4.1		i iguio o
		3.30 ± 0.30	C _L =50pF,	1.5	2.9	5.0	1.5	5.2		
		5.00 ± 0.50	R _L =500Ω	0.8	2.4	4.3	0.8	4.5		
CIN	Input Capacitance	0			4				pF	
C _{PD}	Power Dissipation	3.30			23				pF	Figure 6
CPD	Capacitance ⁽²⁾	5.00			30				μr	Figure 6

Note:

 C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output lading and operating at 50% duty cycle. C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD}=(C_{PD})(V_{CC})(f_{IN})+(I_{CC}static).



AC Electrical Characteristics





Figure 4. AC Test Circuit





Note:

3. Input=AC Waveform; t_r=t_f=1.8ns; PRR=10MHz; Duty Cycle=50%.

Figure 6. I_{CCD} Test Circuit

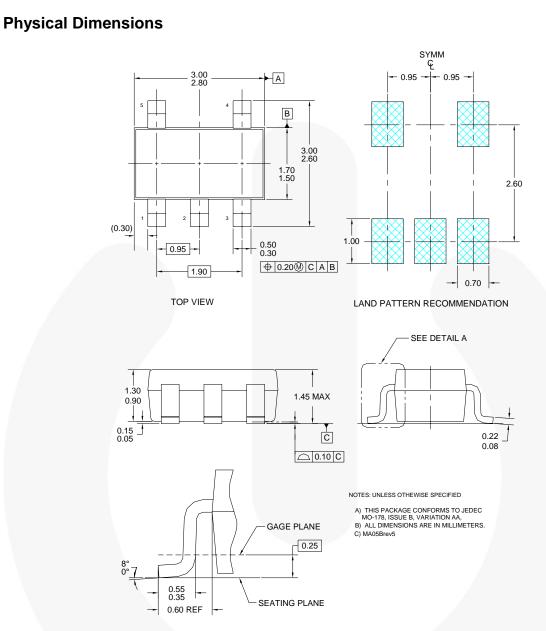


Figure 7. 5-Lead SOT23, JEDEC MO-178 1.6mm

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <u>http://www.fairchildsemi.com/packaging/</u>.

Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications: <u>http://www.fairchildsemi.com/packaging/SOT23-5L_tr.pdf</u>.

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
	Leader (Start End)	125 (Typical)	Empty	Sealed
M5X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

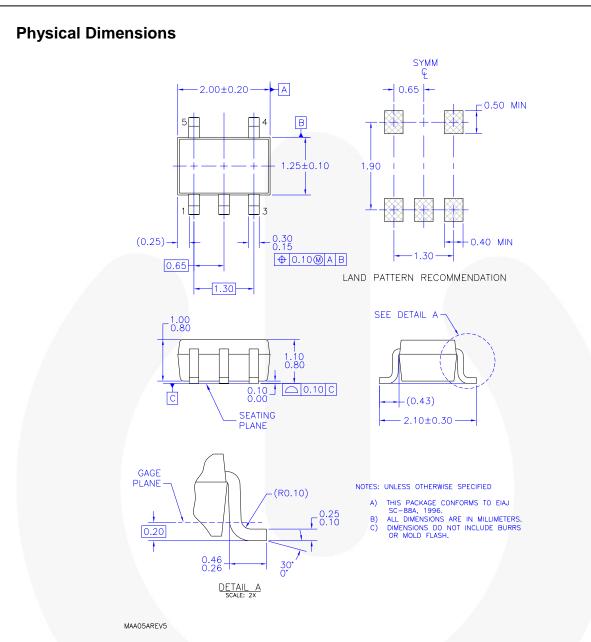


Figure 8. 5-Lead, SC70, EIAJ SC-88a, 1.25mm Wide


Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <u>http://www.fairchildsemi.com/packaging/</u>.

Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications: http://www.fairchildsemi.com/products/analog/pdf/sc70-5_tr.pdf.

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
	Leader (Start End)	125 (Typical)	Empty	Sealed
P5X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

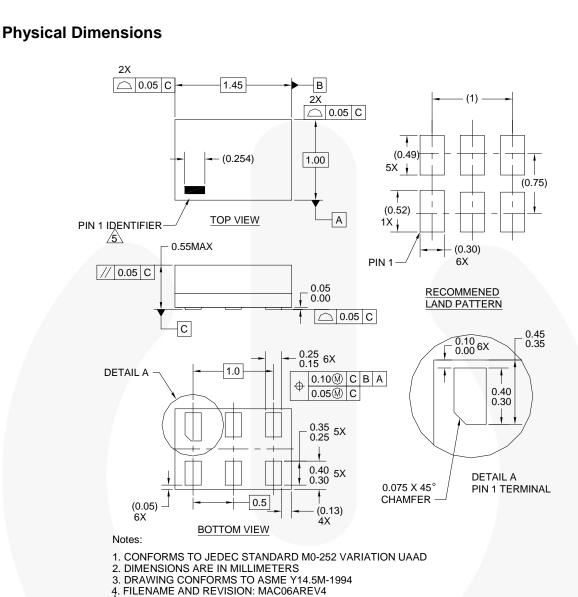

5. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY

OTHER LINE IN THE MARK CODE LAYOUT.

Figure 9. 6-Lead, MicroPak[™], 1.0mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/.

Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications: http://www.fairchildsemi.com/products/logic/pdf/micropak_tr.pdf.

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
	Leader (Start End)	125 (Typical)	Empty	Sealed
L6X	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

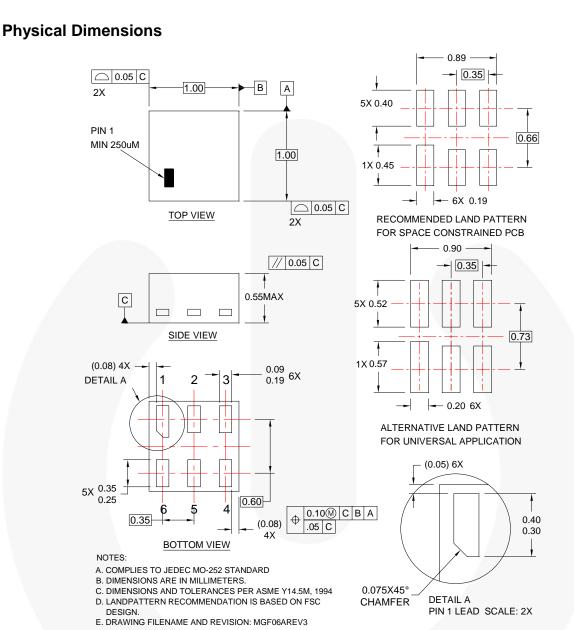


Figure 10.6-Lead, MicroPak2™, 1x1mm Body, .35mm Pitch

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <u>http://www.fairchildsemi.com/packaging/</u>.

Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications: <u>http://www.fairchildsemi.com/packaging/MicroPAK2_6L_tr.pdf</u>.

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
	Leader (Start End)	125 (Typical)	Empty	Sealed
FHX	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed



SEMICONDUCTO

TRADEMARKS

CTL™

ESBC™

F

FACT® FAST®

FPSTM

®

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

F-PFS™ AccuPower™ Auto-SPM™ FRFET Global Power Resource^s AX-CAP™ Build it Now™ Green FPS™ Green FPS™ e-Series™ CorePLUS™ CorePOWER™ Gmax™ GTOM CROSSVOLT" IntelliMAX[™] Current Transfer Logic™ **ISOPLANAR™** DEUXPEED[®] MegaBuck™ MICROCOUPLER™ Dual Cool™ EcoSPARK® MicroFET™ EfficientMax™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ Fairchild® Motion-SPM™ Fairchild Semiconductor® mVVSaver™ FACT Quiet Series™ OptoHiT™ OPTOLOGIC® **OPTOPLANAR®** FastvCore™ FETBench™ FlashWriter®*

Power-SPM™ PowerTrench[®] PowerXS™ Programmable Active Droop™ QFET QSTM Quiet Series™ RapidConfigure™ SignalWise™ SmartMax™ SMART START™ SPM STEALTH™ SuperFET[®] SuperSOT™-3 SuperSOT™6 SuperSOT™8 SupreMOS® SvncFET™

Saving our world, 1mW/W/kW at a time™ Sync-Lock™ GENERAL

wer tranchise TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic TINYOPTOM TinyPower™ TinyFW/M™ TinyWire™

The Power Franchise®

The Right Technology for Your Success™

TriFault Detect™ TRUECURRENT^{M*} uSerDes™ Se Des UHC

Ultra FRFET™ UniFET™ VCX™ VisualMax™ XSTM

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

PDP SPM"

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

NC7SZ02 • Rev. 1.0.5

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Datasheet Identification	Product Status	Definition			
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.			
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.			
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.			
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.			