



FEATURES

- Patents protected
- No opto feedback
- Optimised bipolar output voltages for IGBT/ SiC & MOSFET gate drives
- Configurable dual outputs for all gate drive applications:
- +15V/-5V, +15V/-10V & +20V/-5V outputs UL60950 Reinforced isolation to 690Vrms
- Recognition pending
- IEC 61800-5-1 recognition pending
- Characterised dv/dt immunity 80kV/µs at 1.6kV
- Characterised partial discharge performance
- 14mm Creepage and clearance
- Ultra low coupling capacitance 13pF
- DC link voltage 3kVDC
- 5V, 12V & 24V input voltages
- 105°C operating temperature

PRODUCT OVERVIEW

With 14mm creepage and clearance distances and reinforced insulation rating of 690VAC, the MGJ6 14mm is ideally suited for use in higher efficiency 690VAC industrial electrical distribution systems. Offering configurable dual output voltages of +15V/-10V, +20V/-5V and +15V/-5V, the MGJ6 series of DC-DC converters is ideal for powering 'high side' and 'low side' gate drive circuits for IGBTs, Silicon and Silicon Carbide MOSFETs in bridge circuits. A choice of asymmetric output voltages allows optimum drive levels for best system efficiency and EMI. The MGJ6 series is characterised for high isolation and dv/dt requirements commonly seen in bridge circuits used in motor drives and inverters.



MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

SELECTION GUIDE								
				Output 1			Output 2	
Order Code ¹	Input Voltage Range	Typical Application	Rated Output Voltage	Rated Output Current	Output Power	Rated Output Voltage	Rated Output Current	Output Power
	V	See page 3	V	mA	W	V	mA	W
MGJ6D051510WMC	4.5 - 9	IGBT	+15	240	3.6	-10	240	2.4
MGJ6D121510WMC	9 - 18	IGBT	+15	240	3.6	-10	240	2.4
MGJ6D241510WMC	18 - 36	IGBT	+15	240	3.6	-10	240	2.4
MGJ6D052005WMC	4.5 - 9	SiC	+20	240	4.8	-5	240	1.2
MGJ6D122005WMC	9 - 18	SiC	+20	240	4.8	-5	240	1.2
MGJ6D242005WMC	18 - 36	SiC	+20	240	4.8	-5	240	1.2
MGJ6D051505WMC	4.5 - 9	MOSFET	+15	300	4.5	-5	300	1.5
MGJ6D121505WMC	9 - 18	MOSFET	+15	300	4.5	-5	300	1.5
MGJ6D241505WMC	18 - 36	MOSFET	+15	300	4.5	-5	300	1.5

SELECTION GUIDE (Continued) Output 1 Output 2 Load Regulation (Max) Load Regulation (Max) -oad Regulation (Typ) Ripple & Noise (Max)⁶ -oad Regulation (Typ) Ripple & Noise (Max)⁶ Ripple & Noise (Typ)² Ripple & Noise (Typ) Order Code¹ Input Voltage Typical Application Range % % mVp-p mVp-p ۷ See page 3 MGJ6D051510WMC 4.5 - 9 IGBT 5 10 105 160 5 10 80 120 MGJ6D121510WMC 9 - 18 IGBT 5 160 10 80 10 105 5 120 MGJ6D241510WMC 18 - 36 IGBT 5 10 105 160 5 10 80 120 MGJ6D052005WMC 4.5 - 9 SiC 5 10 105 160 5 10 80 120 MGJ6D122005WMC SiC 9 - 18 5 10 105 160 5 10 80 120 MGJ6D242005WMC 18 - 36 SiC 5 10 105 160 5 10 80 120 MGJ6D051505WMC 4.5 - 9 MOSFET 5 10 105 160 5 10 80 120 MGJ6D121505WMC 9 - 18 MOSFET 5 10 105 160 5 10 80 120 MGJ6D241505WMC 18 - 36 MOSFET 5 10 105 160 5 10 80 120

1. Components are supplied in tape and reel packaging, please refer to package specification section. Orderable part numbers are MGJ6D051510WMC-R7 (25 pieces per reel), or MGJ6D051510WMC-R13 (140 pieces per reel). 2. See ripple & noise test method.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

MGJ6 14mm Series

SELECTION GUIDE (Continued)						
					nce	MT	TF ¹
Order Code	Nominal Input Voltage	Input Current at Rated Load	Efficiency (Min)	Efficiency (Typ)	Isolation Capacitance	MIL 217	Telcordia
	V	mA	a	6	pF	kŀ	Irs
MGJ6D051510WMC	5	1500	74	77.5	13	669	21.388
MGJ6D121510WMC	12	620	76.5	80	13	789	19,546
MGJ6D241510WMC	24	300	78	81.5	13	784	19,570
MGJ6D052005WMC	5	1500	74	77.5	13	669	21.388
MGJ6D122005WMC	12	620	76.5	80	13	789	19,546
MGJ6D242005WMC	24	300	78	81.5	13	784	19,570
MGJ6D051505WMC	5	1500	74	77.5	13	669	21.388
MGJ6D121505WMC	12	620	76.5	80	13	789	19,546
MGJ6D241505WMC	24	300	78	81.5	13	784	19,570

Parameter	Conditions	Min.	Тур.	Max.	Units
	5V input types	4.5	5	9	
Voltage range	12V input types	9	12	18	V
	24V input types	18	24	36	
	Turn on threshold MGJ6D05		4.1		
	Turn off threshold MGJ6D05		3.0		
Index veltage leak out	Turn on threshold MGJ6D12		8.1	V	
Inder voltage lock out	Turn off threshold MGJ6D12		7.5		V
	Turn on threshold MGJ6D24		16.7		
	Turn off threshold MGJ6D24		16.3		
	5V input types		20		
nput ripple current	12V input types		50		mA p-p
	24V input types		38		h-h
OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units

Parameter	Conditions	Min.	Тур.	Max.	Units
Minimum load	Below 10% load, 5V and 15V outputs are clamped to 6V and 17V respectively	10			%
Voltage set point accuracy	Output 1		±3		%
voltage set point accuracy	Output 2		±5		70
Line regulation	Low line to high line			2	%
Total Regulation				15	%
Transient response	Peak deviation (50-100% & 100-50% load swing)		0.5		$%V_{\text{out}}$
	Settling time		0.3		ms
GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency			100		kHz

MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Operation	See derating graphs	-40		105	
Storage		-55		125	°C
Product temperature rise above ambient	100% Load, Nom V _{IN} , Still Air		20		

ISOLATION CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
lociation toot voltage	Flash tested for 1 second	10200			VDC
Isolation test voltage	Qualification tested for 1 minute	10200			VDC
Resistance	Viso = 1kVDC	100			GΩ
Continuous barrier withstand voltage	Non-safety barrier application			3000	VDC

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection	Continuous
Input voltage, MGJ6 5V input types	12V
Input voltage, MGJ6 12V input types	20V
Input voltage, MGJ6 24V input types	40V

RoHS COMPLIANCE, MSL AND PSL INFORMATION



This series is compatible with RoHS soldering systems with a peak reflow solder temperature of 245°C and Time Above Liquidus for 90 seconds. as per J-STD-020D.1. The pin termination finish on this product series is Gold with Nickel Pre-plate. The series is backward compatible with Sn/Pb soldering systems. The series has a Moisture Sensitivity Level (MSL) 2. Samples of the product series were tested in accordance with the conditioning described for MSL level 2 in IPS/J-STD-020D.1. The product series passed electrical tests, co-planarity and visual inspection criteria.

MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

150

APPLICATION NOTES

Start-up times

Typical start up times for this series, with no additional output capacitance are:

Part No.	Start-up times
Fall NU.	ms
MGJ6D051510WMC	15
MGJ6D121510WMC	15
MGJ6D241510WMC	15

Output Voltage	Maximum output capacitance
V	μF
-5	470
-10	220
15	220

Output capacitance must not exceed:

20

Disable/Frequency synchronisation

Please refer to application notes for further information.	Min	Tvn	Max	Unite	

		141111	iyp	IVIUN	Onnto
	Pull Down Current		0.5		mA
Disable/Synch ¹	Input High	2		5	V
	Input Low	0		0.8	V
Supervised	Frequency Range	90	100	110	kHz
Synchronisation	Duty Cycle	25		75	%

The Disable/Synchronization pin has three modes:


1. When a dc logic low voltage is applied to this pin the MGJ6 is disabled and enters a low quiescent current sleep mode.

2. When this pin is left floating or a dc logic high (CMOS/TTL compatible) voltage is applied the MGJ6 is enabled and operates at the programmed frequency of 100kHz. 3. When a square wave of between 90kHz and 110kHz is applied to this pin, the switcher operates at the same frequency as the square wave. The falling edge of the square wave corresponds to the start of the switching cycle. If the signal is slower than 25Hz, it will be interpreted as enabling and disabling the part. If the MGJ6 is disabled, it must be disabled for 7 clock cycles before being re-enabled.

Terminal	IGBT	SIC	MOSFET
(P5) 15V Output	+15V 0.24A	+20V 0.24A	+15V 0.3A
(P4) 15V Return 5VA Output	OV	No connection	OV
(P3) 5VA Return 5VB Output	No connection	OV	-5V 0.3A
(P2) 5VB Return	-10V 0.24A	-5V 0.24A	No connection

MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

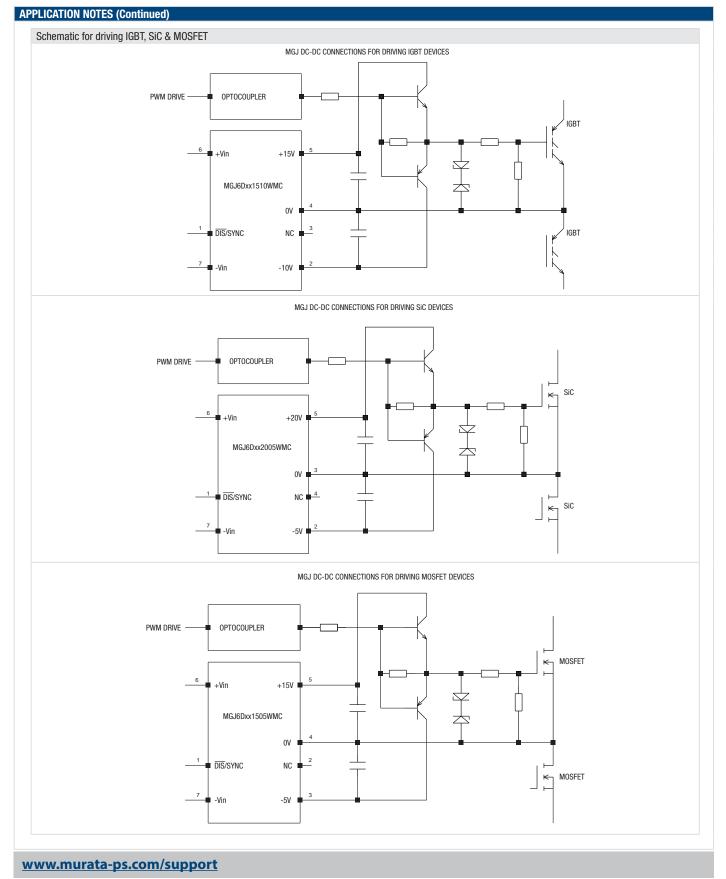

KDC_MGJ6-14mm.A02 Page 5 of 12

MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions MGJ6 series of DC/DC converters are all 100% production tested at 10.2kVDC for 1 second and have been qualification tested at 10.2kVDC for 1 minute.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

When the insulation in the MGJ6 series is not used as a safety barrier , i.e. provides functional isolation only, continuous or switched voltages across the barrier up to 3kV are sustainable. Long term reliability testing at these voltages continues. Peak Inception voltages measured were in excess of 3.5kV when testing for partial discharge in accordance with IEC 60270. Please contact Murata for further information.

The MGJ6 series is pending recognition by Underwriters Laboratory to 690 Vrms Reinforced Insulation, please see safety approval section below.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

SAFETY APPROVAL

IEC61800-5-1

The MGJ6 series is pending recognition IEC61800-5-1 based upon a working voltage of 690 Vrms max., between Primary and Secondary.

UL 60950

The MGJ6 series is pending recognition by Underwriters Laboratory (UL) to UL60950 for reinforced insulation to a working voltage of 690Vrms with a maximum measured product operating temperature of 130°C.

Creepage and clearance 14mm.

FUSING


The MGJ6 series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below. Input Voltage, 5V 4A Input Voltage, 12V 2A Input Voltage, 24V 1A All fuses should be UL recognized, 125V rated.

CHARACTERISATION TEST METHODS


Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter					
C2	10μ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than $100m\Omega$ at 100 kHz					
C3	100nF multilayer ceramic capacitor, general purpose					
R1	450Ω resistor, carbon film, ±1% tolerance					
R2	50Ω BNC termination					
T1	3T of the coax cable through a ferrite toroid					
RLOAD	Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires					
Measured va	lues are multiplied by 10 to obtain the specified values.					
ifferential Moo	le Noise Test Schematic					



MGJ6 14mm Series

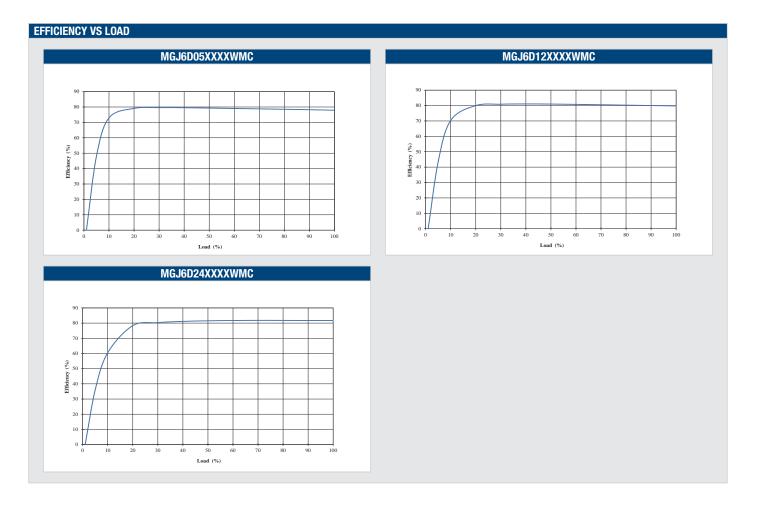



MGJ6 14mm Series


10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

DERATING GRAPHS

Derating curves are based on IPC-9592. With no derating some components may be operating at the manufacturers maximum temperature ratings.

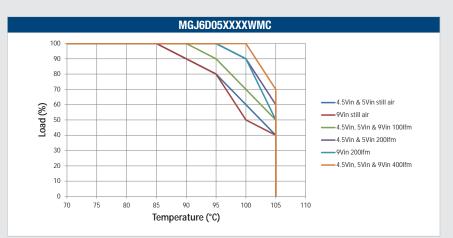

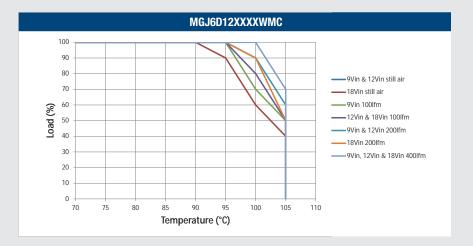

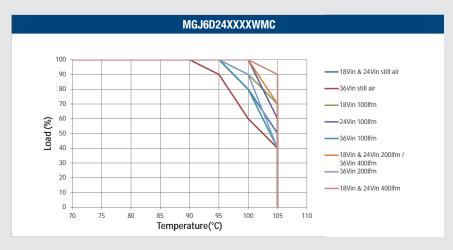


MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

EMC FILTERING AND SPECTRA

FILTERING


The following filter circuit and filter table shows the input filters typically required to meet conducted emissions limits for EN 55022 curve B using Quasi-Peak (pink line) and average (green line) detectors according to CISPR 22. The following plots show measurements of the positive (L1) and negative (L2) inputs for both Quasi-peak limit B adherence and Average limit B adherence.




C1, C2 & C3 Polyester or ceramic capacitor


C4 Electrolytic capacitor (note R1 could be omitted if C4 has ESR >= R1)

TO MEET CURVE B								
Part Number	C1	L1&2	Through Hole	C2&3	R1	C4		
MGJ6D05XXXXWMC	3.3uF	3mH	47100SC	10nF	500mΩ	470uF		
MGJ6D12XXXXWMC	3.3uF	3mH	47100SC	10nF	500mΩ	470uF		
MGJ6D24XXXXWMC	3.3uF	3mH	47100SC	10nF	500mΩ	470uF		
















MGJ6 14mm Series

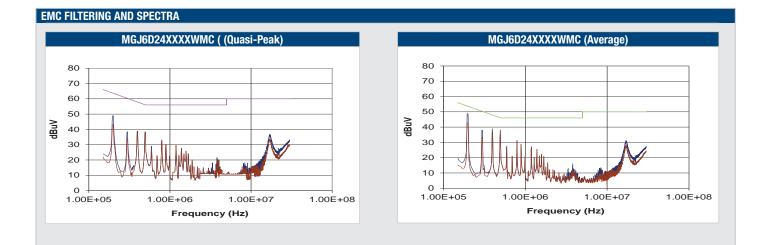


MGJ6 14mm Series

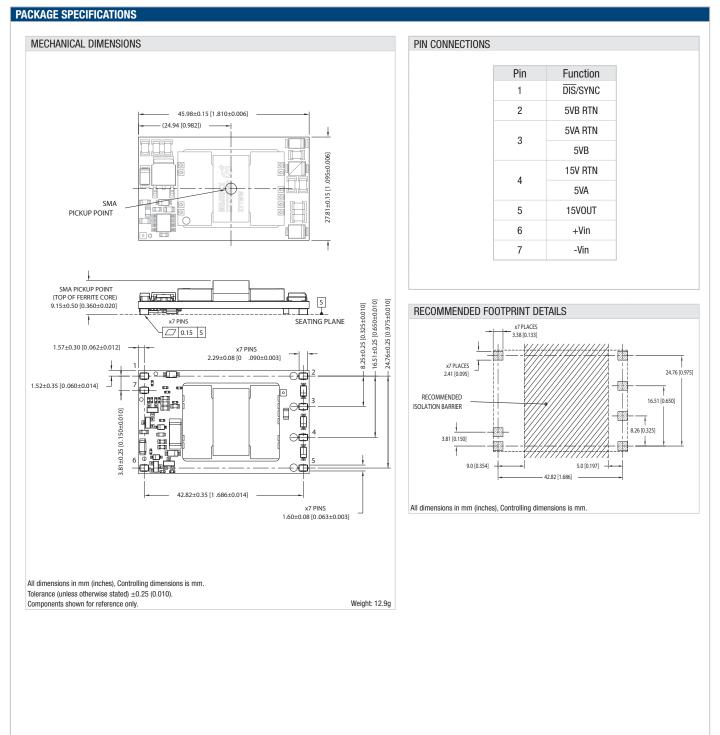

MGJ6 14mm Series

10.2kVDC Isolated 6W Gate Drive SM DC/DC Converters

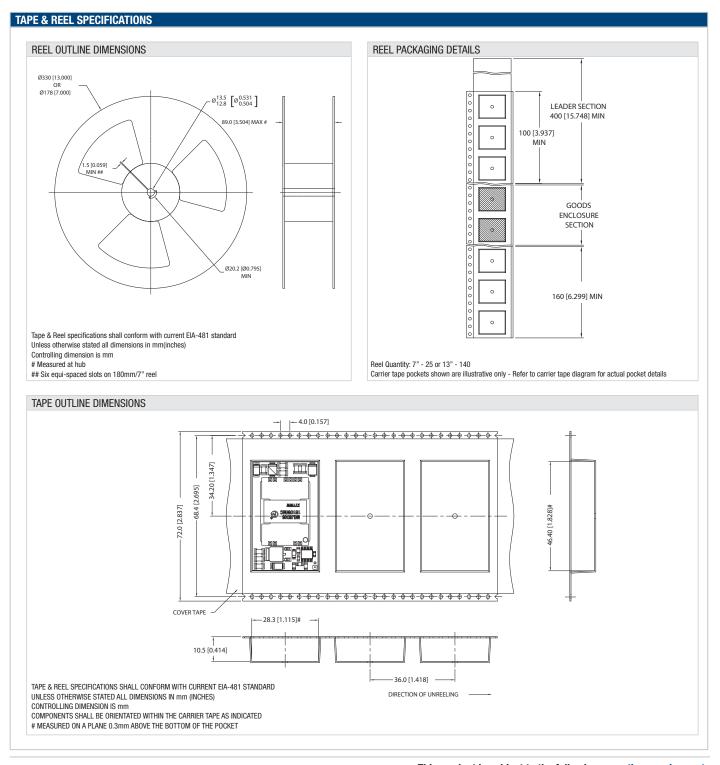

This product is subject to the following <u>operating requirements</u> and the <u>Life and Safety Critical Application Sales Policy</u>: Refer to: <u>http://www.murata-ps.com/requirements/</u>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.