	muRata Inductor Data S	Sheet					
	LQW18AN91NG	8Z# "#" indicates a package	e specification code				
	In Production Linfo-						
	< List of part numbers with package codes > LQW18AN91NG8ZB , LQW18AN91NG8ZB						
I	Shape Notes						
	1.65±0.1	10120 	When rate	Please consider 'Notice (Rating).' When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max.			
			References				
	0.28±0.1 (in m		Packaging code	Specifications	Minimum quantity		
			D	φ180mm Paper taping	4000		
			J	φ330mm Paper taping	10000		
	L size	1.65 ±0.1mm	В	Packing in bulk	500		
	Wsize	0.99 ±0.1mm					
	T size	0.9 ±0.1mm	Mass (Typ.)				

0603 (1608)

# Specifications

Size code in inch (mm)

Inductance	91nH ±2%
Inductance test frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	520mA
Max. of DC resistance	0.54Ω
Q (min.)	33
Q test frequency	150MHz
Self resonance frequency (min.)	1900MHz
Operating temperature range (Self-temperature rise is not included)	-55 to 125°C
Series	LQW18AN_8Z

1 piece

## 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



1 of 3

0.0034g



In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Derating of Rated Current




#### \rm Attention

This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

muRata Murata Manufacturing Co., Ltd.

# Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Q-Frequency characteristics (Typ.)

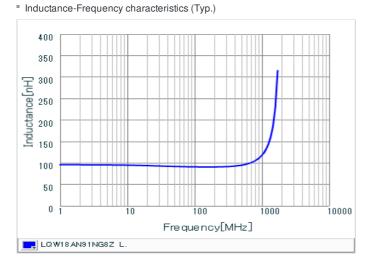



### 🔔 Attention

This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.