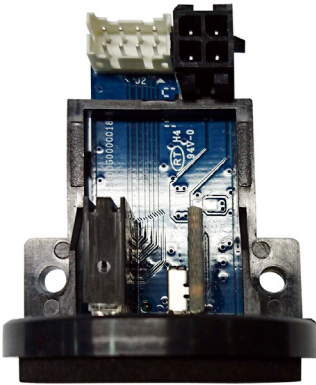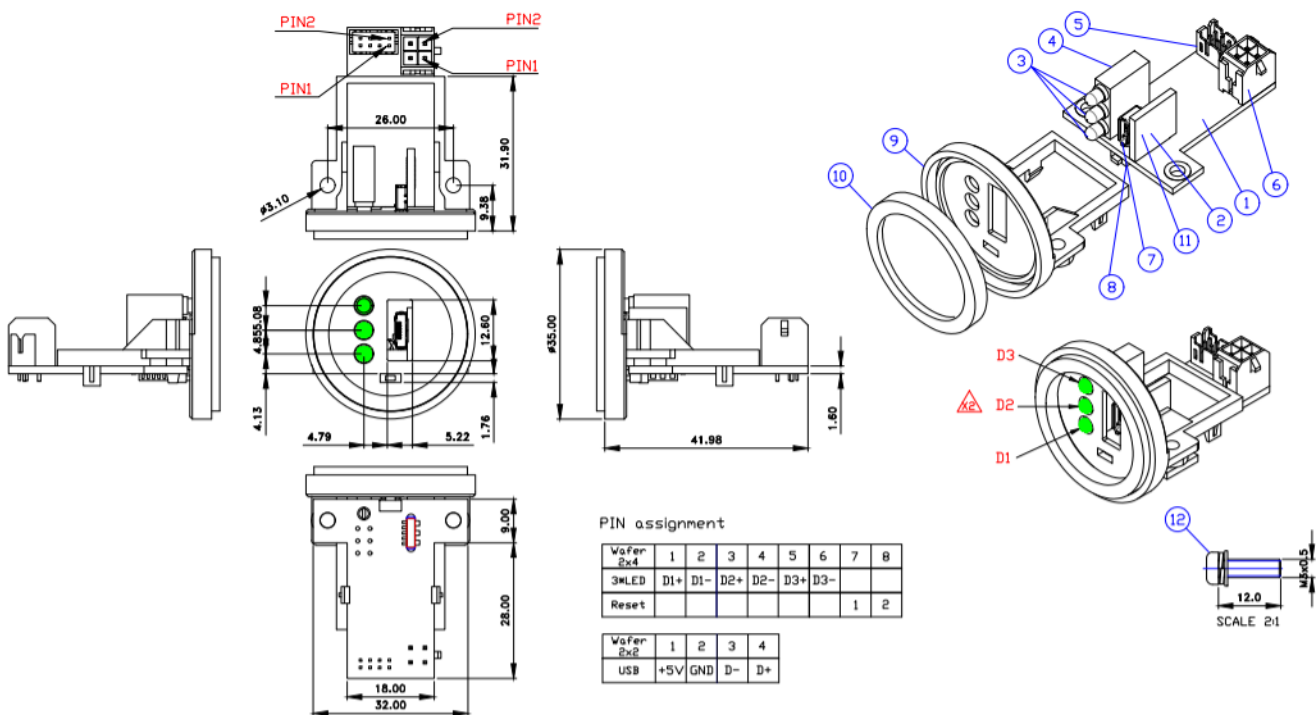# 3 x Green LED + Micro USB + Reset Module

multicomp PRO

RoHS Compliant

Assy KIT,M-SMART,LED 3 in 1,Micro USB ,Reset,4+8 PIN

PIN assignment

Wafer 2x4	1	2	3	4	5	6	7	8
3*LED	D1+	D1-	D2+	D2-	D3+	D3-		
Reset							1	2

Wafer 2x2	1	2	3	4
USB	+5V	GND	D-	D+

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

Page <1>   02/12/21   V1.0

3 x Green LED + Micro USB + Reset Module

multicompPRO

No.	Description	Qty
1	PCB, FR4 4L, 32mm × 37mm × 1.6t	1
2	PCB, FR4 4L, 32mm × 15mm × 1.6t	1
3	Green LED, Forward Voltage Tup. 2.2V/Max. 2.6V	3
4	LED Spacer, for 3*LED	1
5	Wafer 2 × 4, Pitch 2.0mm	1
6	Wafer 2 × 2, Pitch 3.0mm	1
7	Micro USB A Type	1
8	Reset, SMT type	1
9	3in1 LED, USB, Reset Holder	1
10	CR4305 Sponge with T4000ø31.7 × ø25.2 × 4.5t, UL94HF-1	1
11	Resistor, 0 ohm, 1/16W, 0402, SMD	2
12	Screw (Spring washer) M3 × 12 Iron Coating with NI	2

Part Number Table

Description	Part Number
Assy KIT, M-SMART, LED 3 in 1, Micro USB ,Reset, 4+8 Pin	MP1020G00000360

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO