
# D2HW

**Sealed Ultra Subminiature Basic Switch** 

## Smallest sealed snap-action switch in the industry with a very long stroke for reliable ON/OFF action

- The case dimensions are 78% of conventional models, contributing to down-sizing of mechanical modules.
- Extra-long stroke even without levers.
   (OT reference value: 1.4 mm).
- Made of environmentally-friendly materials.
   All models are lead-free, including molded lead wire models.

**RoHS Compliant** 

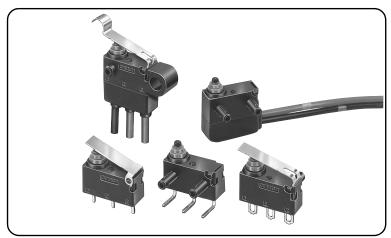

#### **Model Number Legend**

#### 1. Mounting Structure -

A: Without posts (base-mounting)

BR : Long post on right BL : Long post on left

C: M3-screw mounting models

ER: Short post on right EL: Short post on left

#### 2. Raitings

2:5 VDC 1mA to 12 VDC 2A

#### 3. Actuator

- 0: Pin plunger
- 1 : Hinge lever
- 2 : Long hinge lever
- 3: Simulated roller lever
- 4 : Hinge roller lever
- 5 : Straight leaf lever
- 6: Leaf lever
- 7 : Simulated roller leaf lever
- 8: Long leaf lever

#### 4. Contact form

1: SPDT

D2HW-12345-6-7

2 : SPST-NC (Molded lead wire models only)

3: SPST-NO (Molded lead wire models only)

#### 5. Terminals

D, DS : PCB terminals (Straight)
DR, DRS : PCB Terminals (Right-angled)
DL, DLS : PCB Terminals (Left-angled)

H, HS : Solder terminals

M, MS : Molded lead wires downwards
MR, MRS: Molded lead wires on right-side
ML, MLS : Molded lead wires on left-side

Note. UL/cUL approved versions are available. In this case, a "S" will be added to the end of the model number. The Lead wire is a UL approved wire (AWG24, UL1007).

#### 6. Special Specification

└ 7. Special Industry Specification

#### **List of Models**

#### **●**PCB-mounted Models

			List of Models	Long post on right	Short post on right
Actuator	Termi	inals	Contact form		, a
Pin plunger		Straight		-	-
Pin plunger		Angled	SPDT	D2HW-BR201DR	D2HW-ER201DR
Hinge lever	For PCB	Straight		-	-
Tillige level		Angled		D2HW-BR211DR	D2HW-ER211DR
Long hinge	FOI PCB	Straight	2501	-	-
lever		Angled		D2HW-BR221DR	D2HW-ER221DR
Simulated roller		Straight		-	-
hinge lever		Angled		D2HW-BR231DR	D2HW-ER231DR

			List of Models	Long post on left	Short post	Without posts
Actuator	Term	inals	Contact form	Long post on left	on left Q	
Din plunger		Straight		-	-	D2HW-A201D
Pin plunger	Angled		D2HW-BL201DL	D2HW-EL201DL	-	
Hingo lover		Straight		-	-	D2HW-A211D
Hinge lever	For PCB	Angled	ODDT	D2HW-BL211DL	D2HW-EL211DL	-
Long hinge	FOLECE	Straight	SPDT	-	-	D2HW-A221D
lever		Angled		D2HW-BL221DL	D2HW-EL221DL	-
Simulated roller		Straight		-	-	D2HW-A231D
hinge lever		Angled		D2HW-BL231DL	D2HW-EL231DL	-

Note1. Angled terminals and posts are the same direction.

Note2. "S" is added to the end of the model number for the UL/cUL-approved version Consult your OMRON sales representative for details.

### D2HW

#### •Models with Solder Terminals or Molded Lead Wires

			List of Models	Long post on right	Short post on right
Actuator	Teri	minals	Contact form		•
	Solder		SPDT	D2HW-BR201H	D2HW-ER201H
			SPDT	D2HW-BR201M	D2HW-ER201M
		Downwards	SPST-NC	D2HW-BR202M	D2HW-ER202M
Pin plunger	Molded		SPST-NO	D2HW-BR203M	D2HW-ER203M
	lead wires	Right-side	SPST-NC	D2HW-BR202MR	D2HW-ER202MR
		<b>J</b>	SPST-NO	D2HW-BR203MR	D2HW-ER203MR
		Left-side	SPST-NC	D2HW-BR202ML	D2HW-ER202ML
	0.11		SPST-NO	D2HW-BR203ML	D2HW-ER203ML
	Solder		SPDT SPDT	D2HW-BR211H D2HW-BR211M	D2HW-ER211H D2HW-ER211M
		Downwards	SPST-NC	D2HW-BR211M D2HW-BR212M	D2HW-ER211M
		Downwarus	SPST-NO	D2HW-BR213M	D2HW-ER213M
Hinge lever	Molded		SPST-NC	D2HW-BR212MR	D2HW-ER212MR
	lead wires	Right-side	SPST-NO	D2HW-BR213MR	D2HW-ER213MR
			SPST-NC	D2HW-BR212ML	D2HW-ER212ML
		Left-side	SPST-NO	D2HW-BR213ML	D2HW-ER213ML
	Solder		SPDT	D2HW-BR221H	D2HW-ER221H
			SPDT	D2HW-BR221M	D2HW-ER221M
		Downwards	SPST-NC	D2HW-BR222M	D2HW-ER222M
l ana bina a lavisii	- Malded		SPST-NO	D2HW-BR223M	D2HW-ER223M
Long hinge lever	Molded	Dight side	SPST-NC	D2HW-BR222MR	D2HW-ER222MR
	lead wires	Right-side	SPST-NO	D2HW-BR223MR	D2HW-ER223MR
		Left-side	SPST-NC	D2HW-BR222ML	D2HW-ER222ML
		Len-side	SPST-NO	D2HW-BR223ML	D2HW-ER223ML
	Solder		SPDT	D2HW-BR231H	D2HW-ER231H
			SPDT	D2HW-BR231M	D2HW-ER231M
		Downwards	SPST-NC	D2HW-BR232M	D2HW-ER232M
Simulated roller hinge lever	Molded		SPST-NO	D2HW-BR233M	D2HW-ER233M
	lead wires	Right-side	SPST-NC	D2HW-BR232MR	D2HW-ER232MR
	lead wires	riigiit side	SPST-NO	D2HW-BR233MR	D2HW-ER233MR
		Left-side	SPST-NC	D2HW-BR232ML	D2HW-ER232ML
		Lon oldo	SPST-NO	D2HW-BR233ML	D2HW-ER233ML
	Solder		SPDT	D2HW-BR241H	D2HW-ER241H
		Downwards	SPDT	D2HW-BR241M	D2HW-ER241M
			SPST-NC	D2HW-BR242M	D2HW-ER242M
Hinge roller	Molded		SPST-NO	D2HW-BR243M	D2HW-ER243M
lever	lead wires	Right-side	SPST-NC	D2HW-BR242MR	D2HW-ER242MR
			SPST-NO	D2HW-BR243MR	D2HW-ER243MR
		Left-side	SPST-NC SPST-NO	D2HW-BR242ML D2HW-BR243ML	D2HW-ER242ML D2HW-ER243ML
	Solder		SPDT	D2HW-BR251H	D2HW-ER251H
	Joidei		SPDT	D2HW-BR251M	D2HW-ER251M
		Downwards	SPST-NC	D2HW-BR252M	D2HW-ER252M
Straight leaf	_	Bowinardo	SPST-NO	D2HW-BR253M	D2HW-ER253M
lever	Molded		SPST-NC	D2HW-BR252MR	D2HW-ER252MR
.575.	lead wires	Right-side	SPST-NO	D2HW-BR253MR	D2HW-ER253MR
		1 6	SPST-NC	D2HW-BR252ML	D2HW-ER252ML
		Left-side	SPST-NO	D2HW-BR253ML	D2HW-ER253ML
	Solder		SPDT	D2HW-BR261H	D2HW-ER261H
			SPDT	D2HW-BR261M	D2HW-ER261M
		Downwards	SPST-NC	D2HW-BR262M	D2HW-ER262M
Leaf lever	Molded		SPST-NO	D2HW-BR263M	D2HW-ER263M
Leai level	lead wires	Right-side	SPST-NC	D2HW-BR262MR	D2HW-ER262MR
	leau wires	night-side	SPST-NO	D2HW-BR263MR	D2HW-ER263MR
		Left-side	SPST-NC	D2HW-BR262ML	D2HW-ER262ML
		Lon Side	SPST-NO	D2HW-BR263ML	D2HW-ER263ML
	Solder		SPDT	D2HW-BR271H	D2HW-ER271H
			SPDT	D2HW-BR271M	D2HW-ER271M
<b>.</b>		Downwards	SPST-NC	D2HW-BR272M	D2HW-ER272M
Simulated roller	Molded		SPST-NO	D2HW-BR273M	D2HW-ER273M
leaf lever	lead wires	Right-side	SPST-NC	D2HW-BR272MR	D2HW-ER272MR
		3	SPST-NO	D2HW-BR273MR	D2HW-ER273MR
		Left-side	SPST-NC	D2HW-BR272ML	D2HW-ER272ML
			SPST-NO	D2HW-BR273ML	D2HW-ER273ML
			SPDT	D2HW-BR281M	D2HW-ER281M
		Downwards	SPST-NC	D2HW-BR282M	D2HW-ER282M
Language Issues	Molded		SPST-NO	D2HW-BR283M	D2HW-ER283M
Long leaf lever	lead wires	Right-side	SPST-NC	D2HW-BR282MR	D2HW-ER282MR
		J	SPST-NO	D2HW-BR283MR	D2HW-ER283MR
		Left-side	SPST-NC	D2HW-BR282ML	D2HW-ER282ML
			SPST-NO	D2HW-BR283ML	D2HW-ER283ML

Note1. The length of standard lead wires (AVSS 0.5) for molded lead wire models shown above is 30 cm.

Note2. "S" is added to the end of the model number for the UL/cUL-approved version The lead wire models are UL approved wires (AWG24, UL1007). Consult your OMRON sales representative for details.



#### ●Models with Solder Terminals or Molded Lead Wires

			List of Models	Long post on left	Short post on left	M3-screw mounting
Actuator		minals	Contact form		-04	1 3
	Solder		SPDT	D2HW-BL201H	D2HW-EL201H	D2HW-C201H
			SPDT	D2HW-BL201M	D2HW-EL201M	D2HW-C201M
		Downwards	SPST-NC	D2HW-BL202M	D2HW-EL202M	D2HW-C202M
Pin plunger	Molded		SPST-NO	D2HW-BL203M	D2HW-EL203M	D2HW-C203M
	lead wires	Right-side	SPST-NC	D2HW-BL202MR	D2HW-EL202MR	D2HW-C202MR
		_	SPST-NO SPST-NC	D2HW-BL203MR	D2HW-EL203MR D2HW-EL202ML	D2HW-C203MR
		Left-side	SPST-NO	D2HW-BL202ML D2HW-BL203ML	D2HW-EL202ML	<del>-</del>
	Solder		SPDT	D2HW-BL211H	D2HW-EL203ML D2HW-EL211H	D2HW-C211H
	Solder		SPDT	D2HW-BL211M	D2HW-EL211M	D2HW-C211M
		Downwards	SPST-NC	D2HW-BL212M	D2HW-EL212M	D2HW-C212M
_		Dominardo	SPST-NO	D2HW-BL213M	D2HW-EL213M	D2HW-C213M
Hinge lever	Molded		SPST-NC	D2HW-BL212MR	D2HW-EL212MR	D2HW-C212MR
	lead wires	Right-side	SPST-NO	D2HW-BL213MR	D2HW-EL213MR	D2HW-C213MR
			SPST-NC	D2HW-BL212ML	D2HW-EL212ML	-
		Left-side	SPST-NO	D2HW-BL213ML	D2HW-EL213ML	-
	Solder		SPDT	D2HW-BL221H	D2HW-EL221H	D2HW-C221H
			SPDT	D2HW-BL221M	D2HW-EL221M	D2HW-C221M
		Downwards	SPST-NC	D2HW-BL222M	D2HW-EL222M	D2HW-C222M
Long bings lover	Molded		SPST-NO	D2HW-BL223M	D2HW-EL223M	D2HW-C223M
Long hinge lever	lead wires	Dight side	SPST-NC	D2HW-BL222MR	D2HW-EL222MR	D2HW-C222MR
	leau wires	Right-side	SPST-NO	D2HW-BL223MR	D2HW-EL223MR	D2HW-C223MR
		Left-side	SPST-NC	D2HW-BL222ML	D2HW-EL222ML	-
		Lett-side	SPST-NO	D2HW-BL223ML	D2HW-EL223ML	-
	Solder	_	SPDT	D2HW-BL231H	D2HW-EL231H	D2HW-C231H
			SPDT	D2HW-BL231M	D2HW-EL231M	D2HW-C231M
		Downwards Right-side	SPST-NC	D2HW-BL232M	D2HW-EL232M	D2HW-C232M
Simulated roller	Molded		SPST-NO	D2HW-BL233M	D2HW-EL233M	D2HW-C233M
hinge lever	lead wires		SPST-NC	D2HW-BL232MR	D2HW-EL232MR	D2HW-C232MR
			SPST-NO	D2HW-BL233MR	D2HW-EL233MR	D2HW-C233MR
		Left-side	SPST-NC	D2HW-BL232ML	D2HW-EL232ML	-
	Solder		SPST-NO SPDT	D2HW-BL233ML D2HW-BL241H	D2HW-EL233ML D2HW-EL241H	- DOHW CO41H
	Solder	1	SPDT	D2HW-BL241M	D2HW-EL241M	D2HW-C241H D2HW-C241M
	Molded lead wires	Downwards  Right-side	SPST-NC	D2HW-BL241M	D2HW-EL241M	D2HW-C241M
Hinge roller			SPST-NO	D2HW-BL243M	D2HW-EL243M	D2HW-C243M
lever			SPST-NC	D2HW-BL242MR	D2HW-EL242MR	D2HW-C242MR
.eve.			SPST-NO	D2HW-BL243MR	D2HW-EL243MR	D2HW-C243MR
			SPST-NC	D2HW-BL242ML	D2HW-EL242ML	-
		Left-side	SPST-NO	D2HW-BL243ML	D2HW-EL243ML	-
	Solder		SPDT	D2HW-BL251H	D2HW-EL251H	D2HW-C251H
		Downwards  Right-side  Left-side	SPDT	D2HW-BL251M	D2HW-EL251M	D2HW-C251M
			SPST-NC	D2HW-BL252M	D2HW-EL252M	D2HW-C252M
Straight leaf	- Maldad		SPST-NO	D2HW-BL253M	D2HW-EL253M	D2HW-C253M
lever	Molded lead wires		SPST-NC	D2HW-BL252MR	D2HW-EL252MR	D2HW-C252MR
	lead Wiles		SPST-NO	D2HW-BL253MR	D2HW-EL253MR	D2HW-C253MR
			SPST-NC	D2HW-BL252ML	D2HW-EL252ML	-
		Left side	SPST-NO	D2HW-BL253ML	D2HW-EL253ML	-
	Solder		SPDT	D2HW-BL261H	D2HW-EL261H	D2HW-C261H
			SPDT	D2HW-BL261M	D2HW-EL261M	D2HW-C261M
		Downwards	SPST-NC	D2HW-BL262M	D2HW-EL262M	D2HW-C262M
Leaf lever	Molded		SPST-NO	D2HW-BL263M	D2HW-EL263M	D2HW-C263M
	lead wires	Right-side	SPST-NC	D2HW-BL262MR	D2HW-EL262MR	D2HW-C262MR
			SPST-NO SPST-NC	D2HW-BL263MR	D2HW-EL263MR D2HW-EL262ML	D2HW-C263MR
		Left-side	SPST-NC SPST-NO	D2HW-BL262ML D2HW-BL263ML	D2HW-EL262ML D2HW-EL263ML	<u> </u>
	Solder		SPDT	D2HW-BL271H	D2HW-EL263ML D2HW-EL271H	D2HW-C271H
	Joidel		SPDT	D2HW-BL271M	D2HW-EL271M	D2HW-C271M
		Downwards	SPST-NC	D2HW-BL271M D2HW-BL272M	D2HW-EL271M D2HW-EL272M	D2HW-C271M
Simulated roller		Jonnwards	SPST-NO	D2HW-BL273M	D2HW-EL273M	D2HW-C273M
leaf lever	Molded		SPST-NC	D2HW-BL272MR	D2HW-EL272MR	D2HW-C272MR
icai icvei	lead wires	Right-side	SPST-NO	D2HW-BL273MR	D2HW-EL273MR	D2HW-C273MR
			SPST-NC	D2HW-BL272ML	D2HW-EL272ML	-
		Left-side	SPST-NO	D2HW-BL273ML	D2HW-EL273ML	-
			SPDT	D2HW-BL281M	D2HW-EL281M	D2HW-C281M
		Downwards	SPST-NC	D2HW-BL282M	D2HW-EL282M	D2HW-C282M
			SPST-NO	D2HW-BL283M	D2HW-EL283M	D2HW-C283M
Long leaf lever	Molded	D. 1	SPST-NC	D2HW-BL282MR	D2HW-EL282MR	D2HW-C282MR
	lead wires	Right-side	SPST-NO	D2HW-BL283MR	D2HW-EL283MR	D2HW-C283MR
<u>~</u>	1000 111100					
		Left-side	SPST-NC	D2HW-BL282ML	D2HW-EL282ML	-

Note1. The length of standard lead wires (AVSS 0.5) for molded lead wire models shown above is 30 cm.

Note2. "S" is added to the end of the model number for the UL/cUL-approved version The lead wire models are UL approved wires (AWG24, UL1007). Consult your OMRON sales representative for details.

#### **Contact form**


#### **●**SPDT



#### SPST-NC, (Molded Lead Wire Models Only)



#### SPST-NO, (Molded Lead Wire Models Only)



#### **Contact Specifications**

	Specification	Crossbar		
Contact	Material	Gold alloy		
	Gap (standard value)	0.5 mm		
Minimum ap	plicable load (see note)	5 VDC 1mA		

#### **Ratings**

Rated voltage	Resistive load
125 VAC	0.1A
12 VDC 24 VDC	2A 1A
42 VDC	0.5A

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5 %
- (3) Operating frequency: 30 operations/min

#### **Approved Safety Standard**

Consult your OMRON sales representative for specific models with standard approvals.

UL (UL61058-1/cUL C22.2 No.61058-1)

1	Model	D2HW
Rated voltage	Item	Resistive load
100 VAC		0.1A
12 VDC		2A
24 VDC		1A
42 VDC		0.5A

#### **Characteristics**

Permissible operating speed		1 mm to 500 mm/s (for pin plunger models)		
Permissible op	erating frequency	30 operations/min		
Insulation resis	stance	100 M $\Omega$ min. (at 500 VDC with insulation tester)		
Contact	Terminals	100 mΩ max.		
resistance (initial value)	Molded lead wire models	150 m $\Omega$ max.		
	Between terminals of the same polarity	600 VAC 50/60 Hz 1min		
Dielectric strength	Between current-carrying metal parts and ground	1,500 VAC 50/60 Hz 1 min		
oog	Between terminals and non-current-carrying metal parts	1,500 VAC 50/60 Hz 1 min		
Vibration resistance * 1	Malfunction	10 to 55 Hz, 1.5 mm double amplitude		
Shock	Durability	1,000 m/s <sup>2</sup> {approx. 100G} max.		
resistance	Malfunction * 1	300 m/s² {approx. 30G} max.		
Durability * 2	Mechanical	1,000,000 operations min. (30 operations/min)		
Durability 2	Electrical	100,000 operations min. (20 operations/min)		
Degree of	Terminals	IEC IP67 (excluding the terminals on terminal models)		
protection	molded lead wire models	IEC IP67		
Ambient operating temperature		-40 to +85°C (at ambient humidity of 60% max.) (with no icing or condensation)		
Ambient opera	ting humidity	95% max. (for +5 to +35°C)		
Weight		Approx. 0.7 g (for pin plunger models with terminals)		

Note. The data given above are initial values.

- \*1. For the pin plunger models, the above values apply for use at the free position, operating position, and total travel position. For the lever models, they apply at the total travel position. Close or open circuit of the contact is 1ms max.
- \*2. For testing conditions, consult your OMRON sales representative.

## Mounting Structure and Reference Positions for Operating Characteristics (Unit: mm)


## Without posts D2HW-A OMRON Standard Position -5.3⊣

# ●Long post D2HW-B□ 1.7 dia. Standard Position


0

13.3


●M3-screw Mounting Models D2HW-C□




#### **Mounting Hole Dimensions (Reference)**



#### **Mounting Hole Dimensions (Reference)**




#### ●Short post D2HW-E




Note. The reference positions used for Free Position (FP), Operating Position (OP), and Total Travel Position (TTP) values are as shown above for each type of mounting.


#### Terminals/Appearances (Unit: mm)


#### ●PCB terminals (Straight)






●PCB Terminals (Left-angled)






#### ●PCB terminals (Right-angled)






#### Solder terminals

5.08±0.1 5.08±0.




#### ●Molded Lead Wires on Left-side




\* UL approved wires (AWG24, UL1007) are used for UL/cUL standard approved items.

#### ●Molded Lead Wires on Right-side



\* UL approved wires (AWG24, UL1007) are used for UL/cUL standard approved items.

#### Molded Lead Wires Downwards



UL approved wires (AWG24, UL1007) are used for UL/cUL standard approved items.

#### Dimensions (Unit: mm) / Operating Characteristics


The following illustrations and drawings are representative models. When ordering, replace  $\Box$  with the code for the mounting structure, contact form and terminal that you need.


See the "**EList of Models**" for available combinations of appearances.

Refer to page 3 to 4 for the mounting structures and terminal forms.

## ●Pin plunger D2HW-□20□□








Operating characteristics		Туре	Without posts	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Max.	0.75N {76 gf}		
Releasing Force	RF	Min.	0.10N {10 gf}		
Overtravel	OT		1.4 mm (reference value)		
Movement Differential	MD	Max.	0.25 mm		
Free Position	FP	Max.	11.2 mm	7.2	mm
Operating Position	OP		10.4±0.2 mm	6.4±0.	.2 mm
Total Travel Position	TTP	Max.	9.1 mm	5.1	mm

## ●Hinge Lever D2HW-□21□□






Operating characteristics		Туре	Without posts	Models with Posts	M3-screw Mounting Models	
Operating Force	OF	Max.	0.75N {76 gf}			
Releasing Force	RF	Min.	0.07N {7 gf}			
Overtravel	OT		1.6 mm (reference value)			
Movement Differential	MD	Max.	0.5 mm			
Free Position	FP	Max.	12.8 mm 8.8 mm			
Operating Position	OP		11.5±0.5 mm 7.5±0.5 mm		.5 mm	
Total Travel Position	TTP	Max.	10 mm	1 6	mm	

### ●Long Hinge Lever








Operating characteristics		Туре	Without posts	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Max.	0.5N {50 gf}		
Releasing Force	RF	Min.	0.03N {3 gf}		
Overtravel	OT		2.5 mm (reference value)		
Movement Differential	MD	Max.	0.8 mm		
Free Position	FP	Max.	15.5 mm 11.5 mm		
Operating Position	OP		13.3±0.8 mm	9.3±0	.8 mm
Total Travel Position	TTP	Max.	11 mm	7 r	mm

#### ●Simulated Roller Lever

D2HW-□23□□






Operating characteristics		Туре	Without posts	Models with Posts	M3-screw Mounting Models	
Operating Force OF Max.			0.65N {66 gf}			
Releasing Force	RF	Min.	0.05N {5 gf}			
Overtravel	OT		1.9 mm (reference value)			
Movement Differential	MD	Max.		0.5 mm		
Free Position	FP	Max.	16.5 mm 12.5 mm			
Operating Position	OP		15.2±0.5 mm 11.2±0.5 mm			
Total Travel Position	TTP	Max.	13.5 mm	9.5	mm	

## ●Hinge Roller Lever D2HW-□24□□






Operating characteristics		Туре	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Max.	0.65N {66 gf}	
Releasing Force	RF	Min.	0.03N {3 gf}	
Overtravel	OT		1.9 mm (reference value	
Movement Differential	MD	Max.	0.6 mm	
Free Position	FP	Мах.	15.3 mm	
Operating Position	OP		14±0.	6 mm
Total Travel Position	TTP	Max.	12.3	mm

Note1. Unless otherwise specified, a tolerance of  $\pm 0.2 \text{mm}$  applies to all dimensions.

Note2. The operating characteristics are for operation in the A direction (  $\P$  ).

#### ●Leaf straight lever **D2HW-**□**25**□□






Operating characteristics		Туре	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Мах.	1.2N {122 gf}	
Releasing Force	RF	Min.	0.05N {5 gf}	
Overtravel	OT		2.5 mm (reference value)	
Movement Differential	MD	Max.	0.7 mm	
Free Position	FP	Max.	11.9 mm	
Operating Position	OP		8.1±0	.8 mm
Total Travel Position	TTP	Max.	6.0	mm

#### ●Leaf Lever **D2HW-**□26□□






Operating characteristics		Туре	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Max.	1.8N {183 gf}	
Releasing Force	RF	Min.	0.20N {20 gf}	
Overtravel	OT	Max.	1.8 mm (reference value	
Movement Differential	MD		0.5 mm	
Free Position	FP	Max.	9.3 mm	
Operating Position	OP		7.4±0.5 mm	
Total Travel Position	TTP		5.8 mm	

#### ●Simulated Roller Lever

**D2HW-**□**27**□□






Operating characteristics		Туре	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Max.	1.8N {183 gf}	
Releasing Force	RF	Min.	0.20N {20 gf}	
Overtravel	OT	Max.	2.0 mm (reference value)	
Movement Differential	MD		0.5 mm	
Free Position Operating Position Total Travel Position	FP OP TTP	Max.	10.8±0.5 mm	

#### ●Long Leaf Lever D2HW-□28□□





Operating characteristics		Туре	Models with Posts	M3-screw Mounting Models
Operating Force	OF	Max.	0.9N {92 gf}	
Releasing Force	RF	Min.	0.05N {5 gf}	
Overtravel	OT		2.8 mm (reference value	
Movement Differential	MD	Max.	0.7 mm	
Free Position	FP	Max.	19 mm	
Operating Position	OP		15.4±1	.5 mm
Total Travel Position	TTP	Max.	12.8	mm

UL approved wires (AWG24, UL1007) are used for UL/cUL standard approved items.

Note1. Unless otherwise specified, a tolerance of  $\pm 0.2$ mm applies to all dimensions.

Note2. The operating characteristics are for operation in the A direction (  $\P$  ).

#### **Precautions**

#### **★Please refer to "General Information" for correct use.**

#### **Cautions**

#### **●**Degree of Protection

• Do not use this product underwater.

Although molded lead wire models satisfy the test conditions for the standard given below, this test is to check the ingress of water into the switch enclosure after submerging the Switch in water for a given time. Satisfying this test condition does not mean that the Switch can be used underwater.

JIS C0920:

Degrees of protection provided by enclosures of electrical apparatus (IP Code)

IEC 60529:

Degrees of protection provided by enclosures (IP Code)
Degree of protection: IP67

(check water intrusion after immersion for 30 min. submerged 1m underwater)

- Do not operate the Switch when it is exposed to water spray, or when water drops adhere to the Switch surface, or during sudden temperature changes, otherwise water may intrude into the interior of the Switch due to a suction effect.
- Prevent the Switch from coming into contact with oil and chemicals.

Otherwise, damage to or deterioration of Switch materials may result.

 Do not use the Switch in areas where it is exposed to silicon adhesives, oil, or grease. Otherwise faulty contact may result due to the generation of silicon oxide.

#### Soldering

When soldering the lead wire to the terminal, first insert the lead wire conductor through the terminal hole and then conduct soldering.

Make sure that the temperature of the soldering iron tip does not exceed 300°C, and complete the soldering within 3 seconds. Do not apply any external force for 1 minute after soldering.

Soldering at an excessively high temperature or soldering for more than 3 seconds may deteriorate the characteristics of the Switch.

In case of automatic soldering, please do not apply the heat beyond 260°C within 5 seconds. Pay careful attention so that flux or solder liquid does not flow over the edge of the PCB panel.

#### ●Side-actuated (Cam/Dog) Operation

 When using a cam or dog to operate the Switch, factors such as the operating speed, operating frequency, push-button indentation, and material and shape of the cam or dog will affect the durability of the Switch. Confirm performance specifications under actual operating conditions before using the Switch in applications.

#### **Correct Use**

#### Mounting

- Turn OFF the power supply before mounting or removing the Switch, wiring, or performing maintenance or inspection.
   Failure to do so may result in electric shock or burning.
- For M3-screw mounting models, use M3 mounting screws with plane washers or spring washers to securely mount the Switch.

Tighten the screws to a torque of 0.27 to 0.29 N⋅m {27.5 to 29.5 gf}. Exceeding the specified torque may result in deterioration of the sealing or damage.


 For models with posts, secure the posts by thermal caulking or by pressing into an attached device. When pressed into an attached device, provide guides on the opposite ends of the posts to ensure that they do not fall out or rattle.
 Thermal caulking conditions varies according to the equipment, jig and base used for switch mounting. Consult your OMRON sales representative for details.

#### Operating Body

• Use an operating body with low frictional resistance and of a shape that will not interfere with the sealing rubber, otherwise the plunger may be damaged or the sealing may deteriorate.

#### Handling

- Do not handle the Switch in a way that may cause damage to the sealing rubber.
- When handling the Switch, ensure that pressure is not applied to the posts in the directions shown in the following diagram.
   Also, ensure that uneven pressure or pressure in a direction other than the operating direction is not applied to the Actuator as shown in the following diagram. Otherwise, the post,
   Actuator, or Switch may be damaged, or the service life may be reduced.



#### Wiring Molded Lead Wire Models

 When wiring molded lead wire models, ensure that there is no weight applied on the wire or that there are no sharp bends near the parts where the wire is drawn out.
 Otherwise, damage to the Switch or deterioration in the sealing may result.

#### ●Using Micro Loads

 Even when using micro load models within the operating range, if inrush/surge current occurs, it may increase the contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

#### **Regional Contact**

Americas

https://www.components.omron.com/

Asia-Pacific

https://ecb.omron.com.sg/

Korea

https://www.omron-ecb.co.kr/

http://components.omron.eu/

China

https://www.ecb.omron.com.cn/

Japan

https://www.omron.co.jp/ecb/