

# MOSFET - Power, Single N-Channel, STD Gate, SO8FL

## 80 V, 2.6 mΩ, 154 A NTMFS3D0N08X

#### **Features**

- Low Q<sub>RR</sub>, Soft Recovery Body Diode
- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Q<sub>G</sub> and Capacitance to Minimize Driver Losses
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### **Typical Applications**

- Synchronous Rectification (SR) in DC-DC and AC-DC
- Primary Switch in Isolated DC-DC Converter
- Motor Drives


#### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise stated)

Parameter		Symbol	Value	Unit
Drain-to-Source Voltage		$V_{DSS}$	80	V
Gate-to-Source Voltage		$V_{GS}$	±20	V
Continuous Drain Current	T <sub>C</sub> = 25°C	I <sub>D</sub>	154	Α
(Note 1)	T <sub>C</sub> = 100°C		109	
Power Dissipation (Note 1)	T <sub>C</sub> = 25°C	$P_{D}$	133	W
Pulsed Drain Current	T <sub>C</sub> = 25°C,	I <sub>DM</sub>	634	Α
Pulsed Source Current (Body Diode)	t <sub>p</sub> = 100 μs	I <sub>SM</sub>	634	
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>STG</sub>	-55 to +175	°C
Source Current (Body Diode)		Is	201	Α
Single Pulse Avalanche Energy (I <sub>PK</sub> = 53 A) (Note 3)		E <sub>AS</sub>	140	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)		T <sub>L</sub>	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- Actual continuous current will be limited by thermal & electromechanical application board design.
- 3. E<sub>AS</sub> of 140 mJ is based on started T<sub>J</sub> = 25°C, I<sub>AS</sub> = 53 A, V<sub>DD</sub> = 64 V,  $V_{GS}$  = 10 V, 100% avalanche tested

V <sub>(BR)DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX
80 V	2.6 m $\Omega$ @ 10 V	154 A



**N-CHANNEL MOSFET** 

#### MARKING DIAGRAM



DFN5 (SO-8FL) CASE 488AA



3D0N08 = Specific Device Code

A = Assembly Location

Y = Year
W = Work Week
ZZ = Lot Traceability

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NTMFS3D0N08XT1G	DFN5 (Pb-Free)	1500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

#### THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case		1.12	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	39	


- 4. Surface-mounted on FR4 board using 1 in<sup>2</sup> pad, 1 oz. Cu.
- 5.  $R_{\theta JA}$  is determined by the user's board design.

### **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit
OFF CHARACTERISTICS	•		ı			
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 1 mA	80			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$\Delta V_{(BR)DSS}/$ $\Delta T_J$	I <sub>D</sub> = 1 mA. Referenced to 25°C		31.6		mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 80 V, T <sub>J</sub> = 25°C			1	μΑ
		V <sub>DS</sub> = 80 V, T <sub>J</sub> = 125°C			250	1
Gate-to-Source Leakage Current	I <sub>GSS</sub>	V <sub>DS</sub> = 20 V, V <sub>DS</sub> = 0 V			100	nA
ON CHARACTERISTICS						
Drain-to-Source On Resistance	-to-Source On Resistance $R_{DS(on)} \qquad V_{GS} = 10 \text{ V, } I_D = 37 \text{ A}$ $V_{GS} = 6 \text{ V, } I_D = 18 \text{ A}$	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 37 A		2.2	2.6	mΩ
		V <sub>GS</sub> = 6 V, I <sub>D</sub> = 18 A		3.3	5.2	1
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_D = 184 \mu A$	2.4		3.6	V
Gate Threshold Voltage Temperature Coefficient	ΔV <sub>GS(TH)</sub> / ΔT <sub>J</sub>	$V_{GS} = V_{DS}, I_D = 184 \mu A$		-7.5		mV/°C
Forward Transconductance	9FS	V <sub>DS</sub> = 5 V, I <sub>D</sub> = 37 A		115		S
CHARGES, CAPACITANCES & GATE RE	SISTANCE					
Input Capacitance	C <sub>ISS</sub>			3200		pF
Output Capacitance	Coss	, , , , , , , , , , , , , , , , , , ,		930		
Reverse Transfer Capacitance	C <sub>RSS</sub>	$V_{GS} = 0 \text{ V}, V_{DS} = 40 \text{ V}, f = 1 \text{ MHz}$		14		
Output Charge	Q <sub>OSS</sub>			66		nC
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 6 V, V <sub>DD</sub> = 40 V, I <sub>D</sub> = 37 A		28		1
				45		]
Threshold Gate Charge	Q <sub>G(TH)</sub>			10		
Gate-to-Source Charge	$Q_{GS}$	$V_{GS} = 10 \text{ V}, V_{DD} = 40 \text{ V}, I_D = 37 \text{ A}$		15		
Gate-to-Drain Charge	$Q_{GD}$	1		7		
Gate Plateau Voltage	$V_{GP}$			4.7		V
Gate Resistance	$R_{G}$	f = 1 MHz		0.8		Ω
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t <sub>d(ON)</sub>			24		ns
Rise Time	t <sub>r</sub>	Resistive Load,		8		]
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$V_{GS} = 0/10 \text{ V}, V_{DD} = 40 \text{ V}, \\ I_{D} = 37 \text{ A}, R_{G} = 2.5 \Omega$		35		]
Fall Time	t <sub>f</sub>	1		6		
SOURCE-TO-DRAIN DIODE CHARACTE	ERISTICS					
Forward Diode Voltage	V <sub>SD</sub>	$V_{GS} = 0 \text{ V}, I_S = 37 \text{ A}, T_J = 25^{\circ}\text{C}$		0.82	1.2	V
		V <sub>GS</sub> = 0 V, I <sub>S</sub> = 37 A, T <sub>J</sub> = 125°C		0.66		<u></u>
Reverse Recovery Time	t <sub>RR</sub>			23		ns
Charge Time	t <sub>a</sub>	V <sub>GS</sub> = 0 V, dl/dt = 1000 A/μs,		13		]
Discharge Time	t <sub>b</sub>	$I_S = 37 \text{ A}, V_{DD} = 40 \text{ V}$		11		]
Reverse Recovery Charge	Q <sub>RR</sub>			163		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### **TYPICAL CHARACTERISTICS**

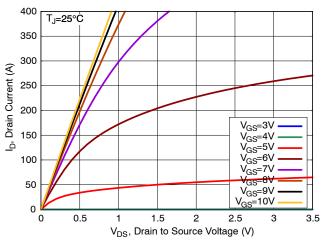

400 V<sub>DS</sub>=5V 350 300 Drain Current (A) 250 T<sub>J=</sub>-55°C-T<sub>J</sub>=25°C-200 T<sub>J</sub>=175°C 150 ئ 100 50 0 0 8 V<sub>GS</sub>, Gate to Source Voltage (V)

Figure 1. On-Region Characteristics

Figure 2. Transfer Characteristics

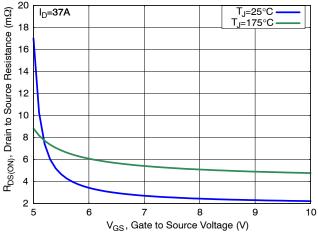

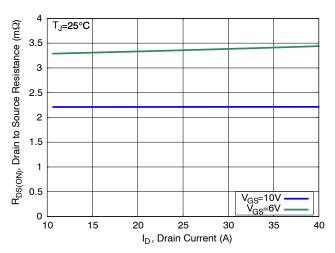
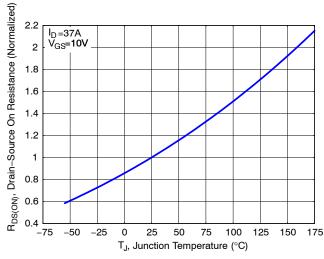


Figure 3. On-Resistance vs. Gate Voltage

Figure 4. On-Resistance vs. Drain Current



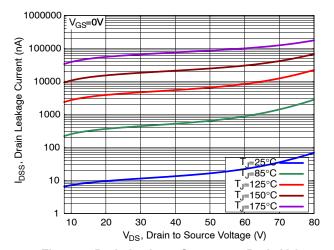


Figure 5. Normalized ON Resistance vs. Junction Temperature

Figure 6. Drain Leakage Current vs. Drain Voltage

#### **TYPICAL CHARACTERISTICS**

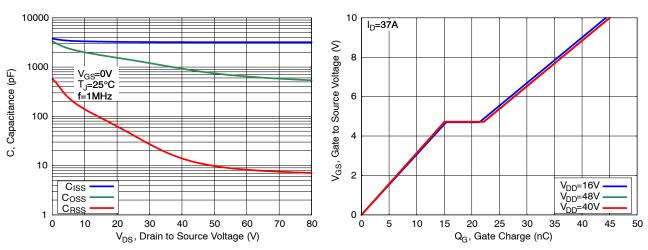


Figure 7. Capacitance Characteristics

Figure 8. Gate Charge Characteristics

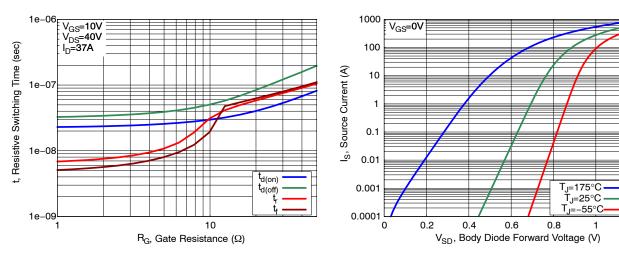


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

Figure 10. Diode Forward Characteristics

1.2

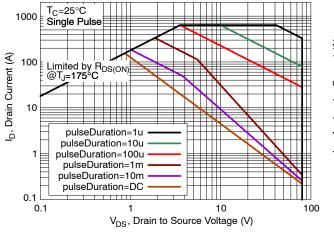


Figure 11. Safe Operating Area (SOA)

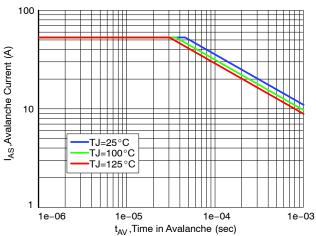


Figure 12. Avalanche Current vs. Pulse Time (UIS)

#### **TYPICAL CHARACTERISTICS**

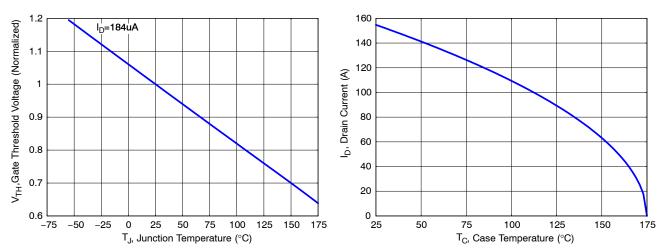


Figure 13. Gate Threshold Voltage vs. Junction Temperature

Figure 14. Maximum Current vs. Case Temperature


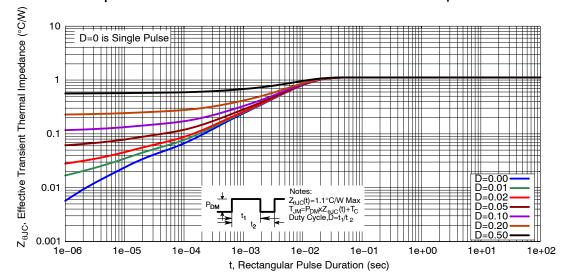


Figure 15. Transient Thermal Response

#### **PACKAGE DIMENSIONS**

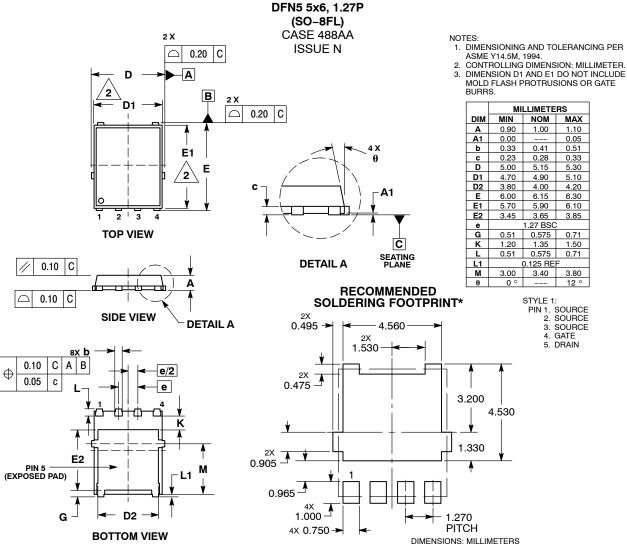

\*For additional information on our Pb–Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Sho

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at <a href="https://www.onsemi.com/support/sales">www.onsemi.com/support/sales</a>