CUI INC
a bel group

SERIES: PCN2-S | DESCRIPTION: DC-DC CONVERTER

FEATURES

- up to 2 W isolated output
- industry standard SIP package
- nominal input voltages: 5, 12, 24 Vdc
- single/dual unregulated output
- 1,000 Vdc isolation voltage
- low ripple and noise
- -40 to 100°C
- efficiency up to 86%

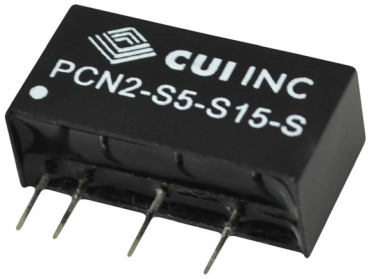

RoHS

MODEL

MODEL	input voltage		output voltage	output current		output power	ripple & noise[1]	efficiency
	typ (Vdc)	range (Vdc)	(Vdc)	min (mA)	max (mA)	max (W)	max (mVp-p)	typ (%)
PCN2-S5-S5-S	5	4.5~5.5	5	0	400	2	100	82
PCN2-S5-S12-S	5	4.5~5.5	12	0	167	2	150	86
PCN2-S5-S15-S	5	4.5~5.5	15	0	134	2	150	85
PCN2-S5-D5-S	5	4.5~5.5	±5	0	±200	2	150	83
PCN2-S5-D12-S	5	4.5~5.5	±12	0	±83	2	150	86
PCN2-S5-D15-S	5	4.5~5.5	±15	0	±67	2	150	86
PCN2-S12-S5-S	12	10.8~13.2	5	0	400	2	100	82
PCN2-S12-S12-S	12	10.8~13.2	12	0	167	2	150	83
PCN2-S12-S15-S	12	10.8~13.2	15	0	134	2	150	84
PCN2-S12-D5-S	12	10.8~13.2	±5	0	±200	2	150	82
PCN2-S12-D12-S	12	10.8~13.2	±12	0	±83	2	150	82
PCN2-S12-D15-S	12	10.8~13.2	±15	0	±67	2	150	84
PCN2-S24-S5-S	24	21.6~26.4	5	0	400	2	100	79
PCN2-S24-S12-S	24	21.6~26.4	12	0	167	2	150	81
PCN2-S24-S15-S	24	21.6~26.4	15	0	134	2	150	82
PCN2-S24-D5-S	24	21.6~26.4	±5	0	±200	2	150	79
PCN2-S24-D12-S	24	21.6~26.4	±12	0	±83	2	150	81
PCN2-S24-D15-S	24	21.6~26.4	±15	0	±67	2	150	82

Notes:
1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with a 0.33 µF ceramic capacitor on the output.
2. Required to add a 2.2 µF (5 & 12 Vdc input models) or 10 µF (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.
3. All specifications are measured at Ta=25°C, nominal input voltage, and rated output load unless otherwise specified.

PART NUMBER KEY

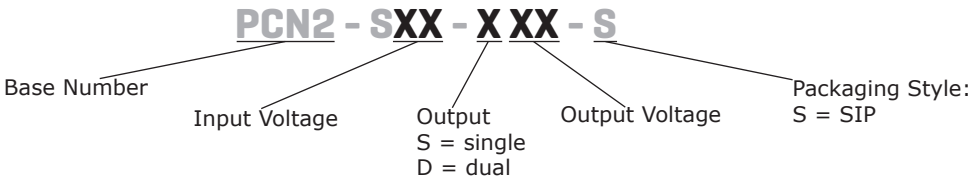

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	5 Vdc input models 12 Vdc input models 24 Vdc input models	4.5 10.8 21.6	5 12 24	5.5 13.2 26.4	Vdc Vdc Vdc
surge voltage	for maximum of 100 ms 5 Vdc input models 12 Vdc input models 24 Vdc input models			 9 18 30	 Vdc Vdc Vdc
current	5 Vdc input models 12 Vdc input models 24 Vdc input models		500 210 110		mA mA mA
filter	capacitive				
input reverse polarity protection	no				
input fuse	1 A time delay fuse for 5 Vdc input models (recommended) 500 mA time delay fuse for 12 Vdc input models (recommended) 250 mA time delay fuse for 24 Vdc input models (recommended)				

Notes: 1. Required to add a 2.2 µF (5 & 12 Vdc input models) or 10 µF (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.

OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load	at full load			470	µF
voltage accuracy				±3.0	%
line regulation	1.0% change in input voltage			±1.2	%
load regulation	from full load to 20% load			±10	%
switching frequency	at nominal Vin, full load		80		kHz
temperature coefficient				±0.05	%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	momentary			1	s

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute	1,000			Vdc
isolation resistance	input to output	1,000			MΩ
isolation capacitance	input to output		15		pF
conducted emissions	EN 55022 Class A & Class B (external circuit required, see Figure 4)				
MTBF	as per MIL-HDBK-217F, full load, GB, 25°C		3,300,000		hours
RoHS	2011/65/EU				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		100	°C
storage temperature		-55		125	°C
operating humidity	non-condensing			95	%

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	see wave soldering profile			260	°C

Notes:
1. Soldering materials: Sn/Cu/Ni
2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
4. Peak temperature: 260°C, above 250°C for 3~6 seconds
5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

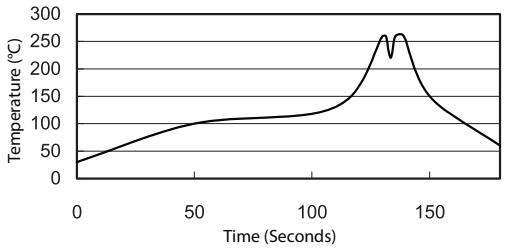

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	0.77 x 0.28 x 0.40 [19.6 x 7.2 x 10.2 mm]				inches
case material	non-conductive black plastic				
weight			2.7		g

MECHANICAL DRAWING

units: inches [mm]
tolerance: X.XX ±0.01 [±0.25]
X.XXX ±0.005 [±0.13]
pin section tolerance: ±0.002[±0.05]

PIN CONNECTIONS		
PIN	Function	
	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
4	-Vout	-Vout
5	No pin	Common
6	+Vout	+Vout

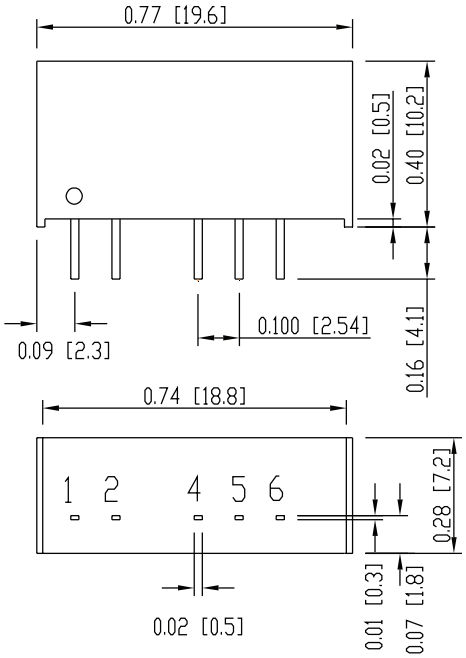

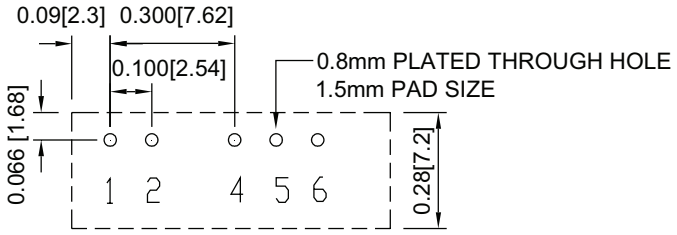

Recommended PCB Layout
Top View

DERATING CURVE

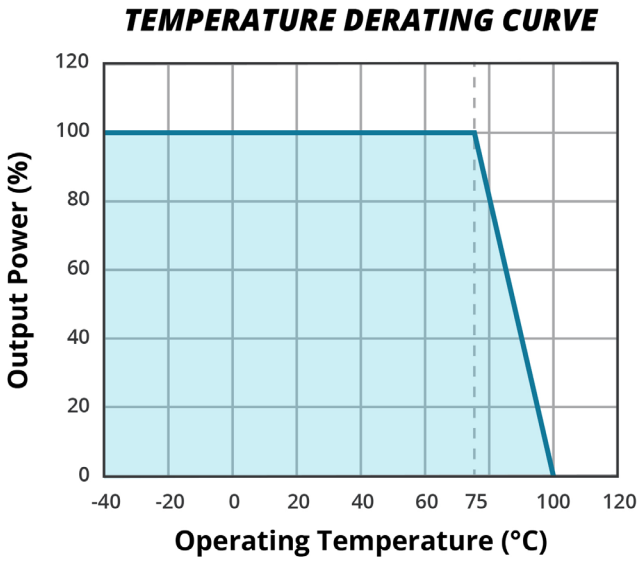

EFFICIENCY CURVES

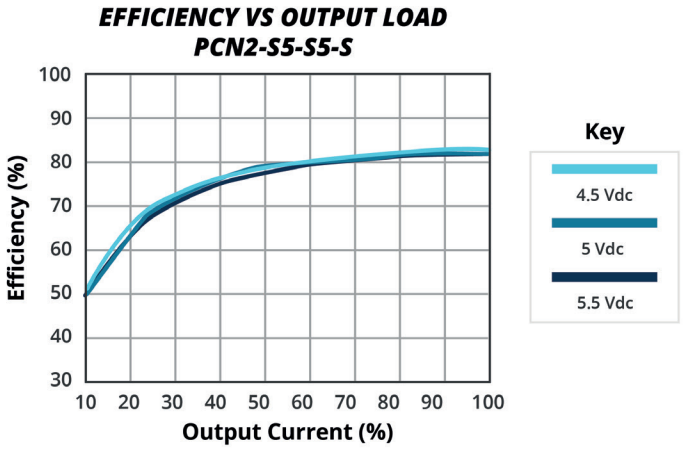

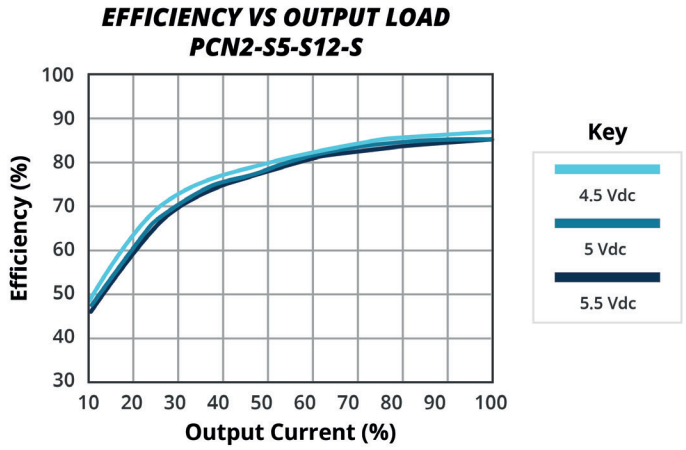

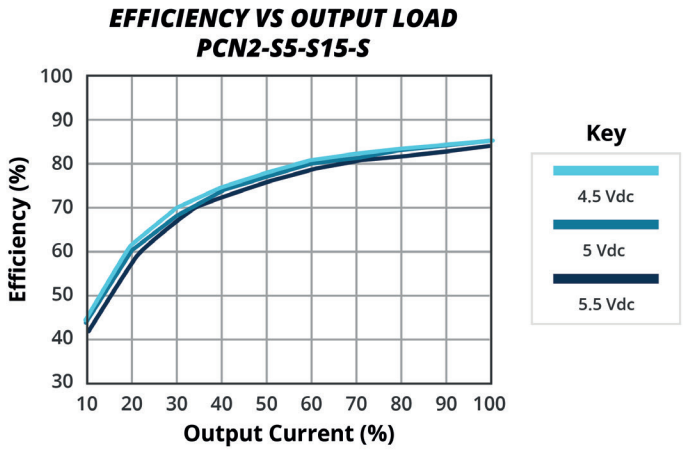

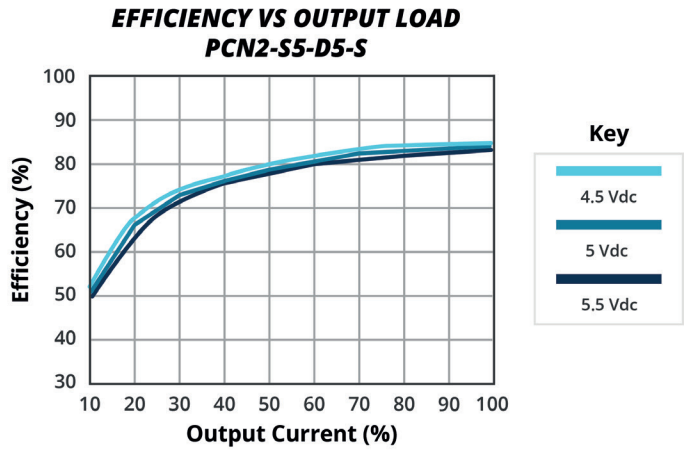

EFFICIENCY CURVES (CONTINUED)

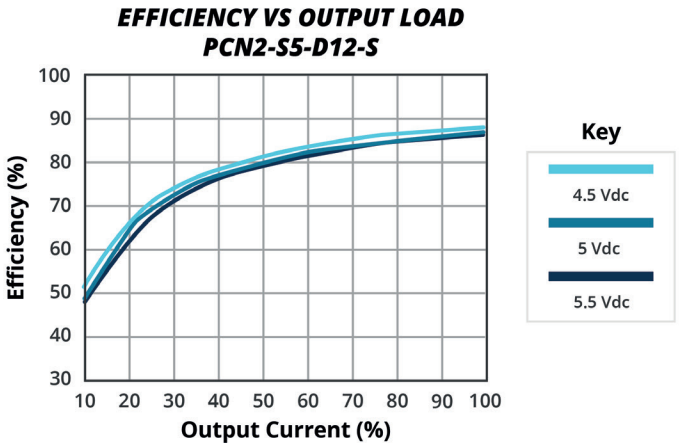

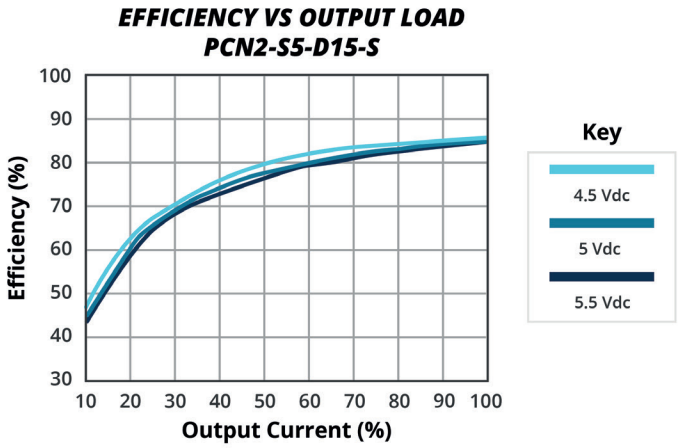

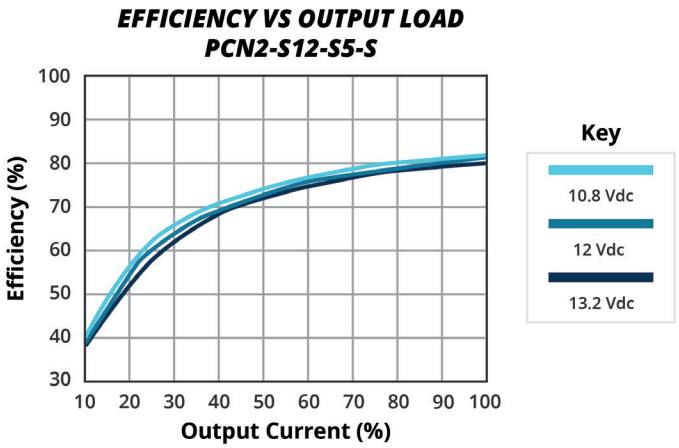

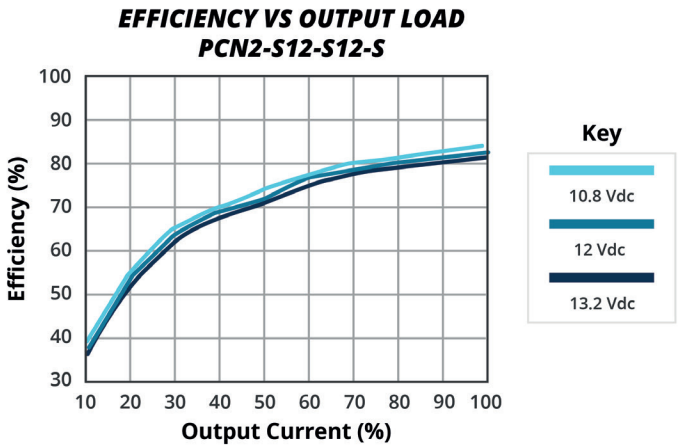

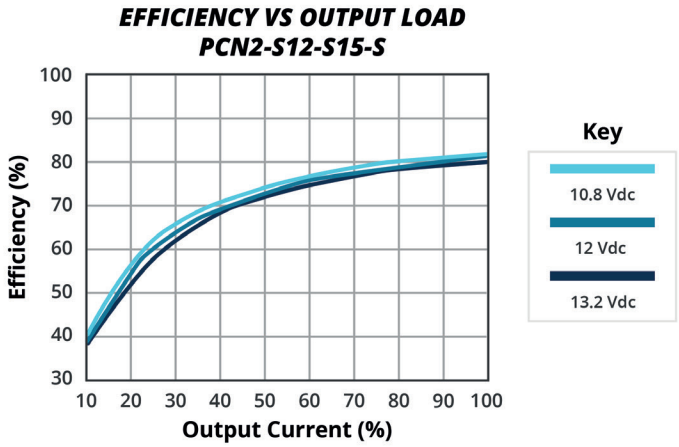

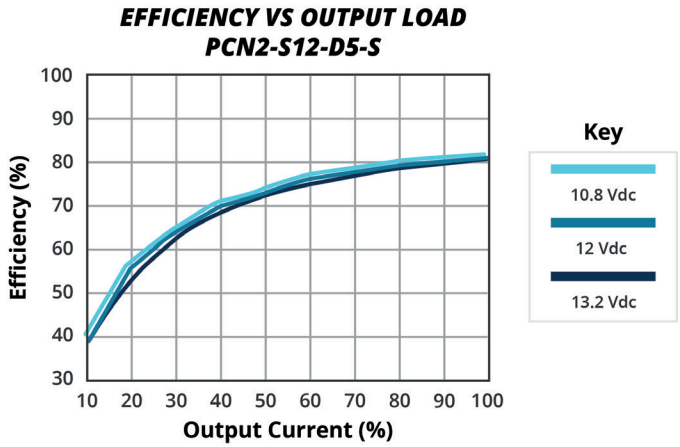

EFFICIENCY CURVES (CONTINUED)

EFFICIENCY VS OUTPUT LOAD
PCN2-S12-D12-S

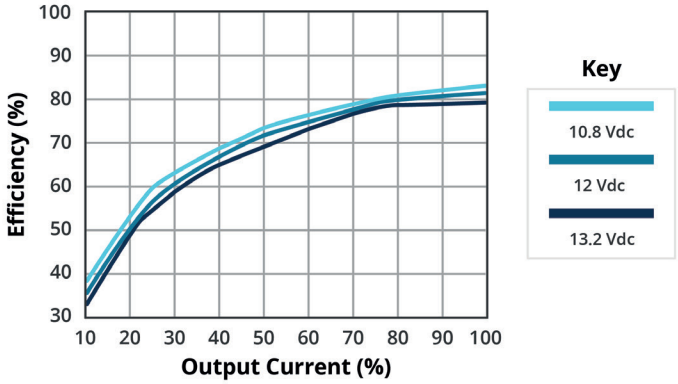

EFFICIENCY VS OUTPUT LOAD
PCN2-S12-D15-S

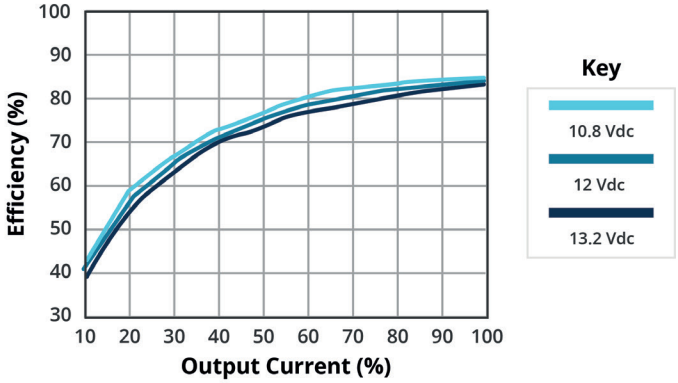

EFFICIENCY VS OUTPUT LOAD
PCN2-S24-S5-S

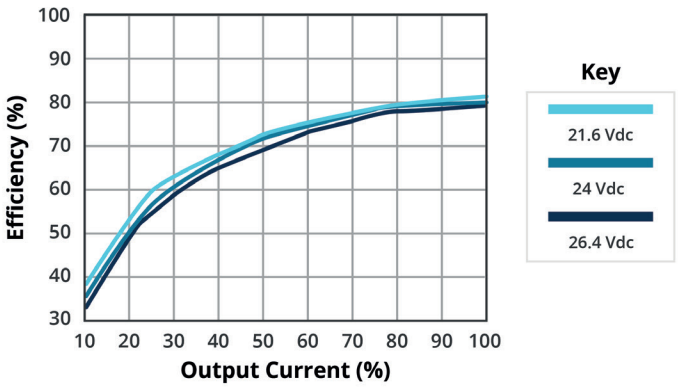

EFFICIENCY VS OUTPUT LOAD
PCN2-S24-S12-S

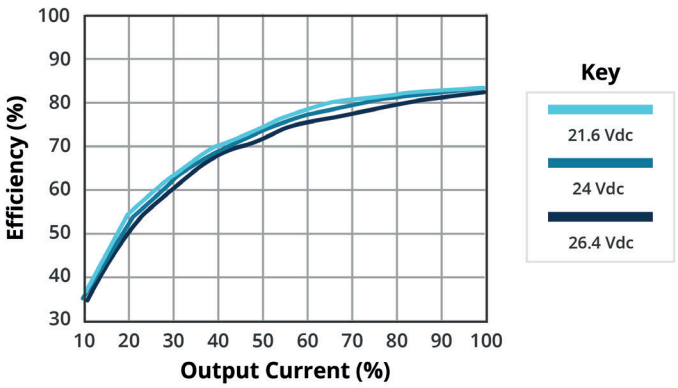

EFFICIENCY VS OUTPUT LOAD
PCN2-S24-S15-S

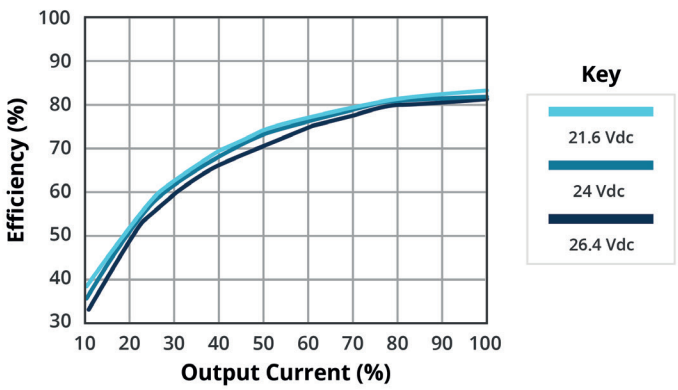

EFFICIENCY VS OUTPUT LOAD
PCN2-S24-D5-S

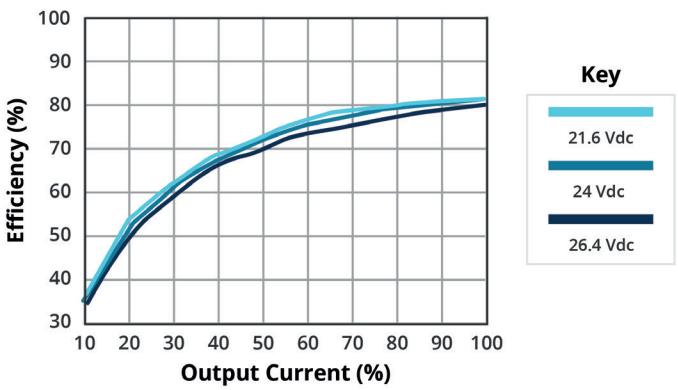

EFFICIENCY CURVES (CONTINUED)

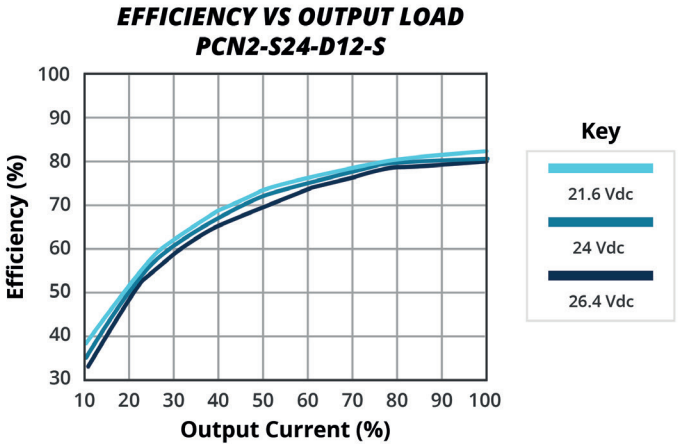

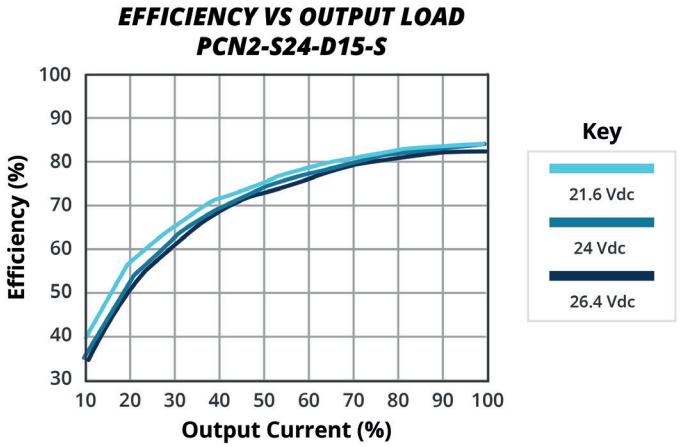

PACKAGING

units: mm

Tube size: 20 x 11 x 330 mm
QTY: 14 pcs

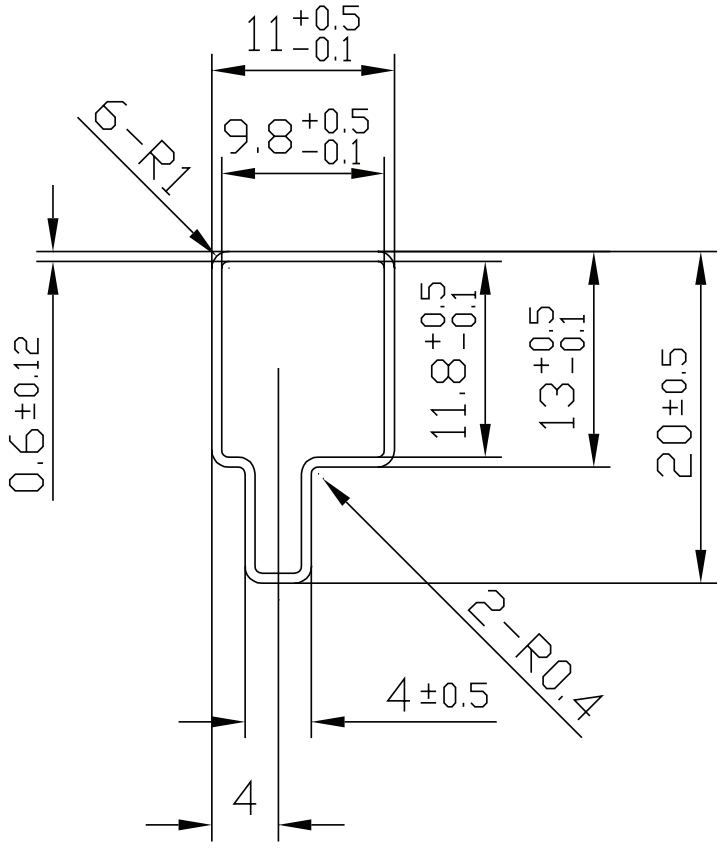

TEST CONFIGURATIONS

Input Ripple Current & Output Noise

Figure 1 Measuring Input Ripple Current

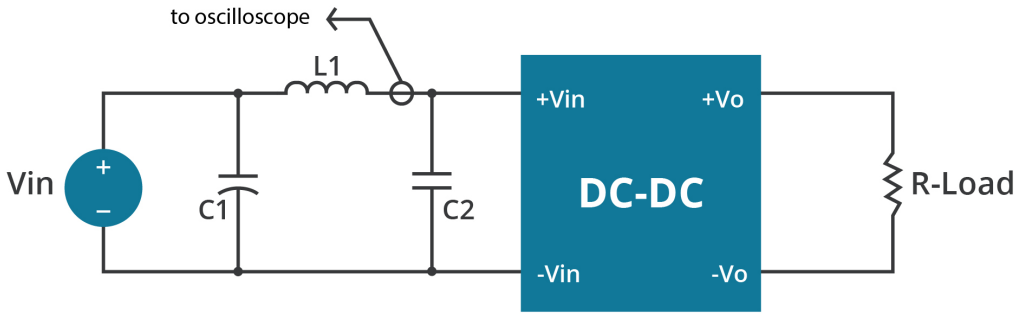

Table 1

Input Voltage (Vdc)	L1	C1	C2
5	12 µH	2.2 µF tantalum capacitor	NC
12	12 µH	2.2 µF tantalum capacitor	NC
24	12 µH	10 µF ceramic capacitor	NC

Figure 2 Measuring Output Ripple & Noise for Single Output Models

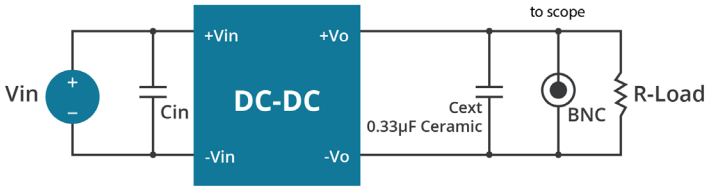

Figure 3 Measuring Output Ripple & Noise for Dual Output Models

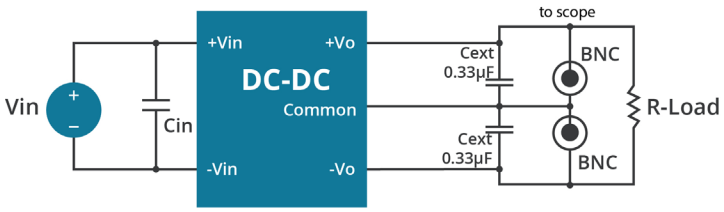

Table 2

Input Voltage (Vdc)	Cin
5	2.2 µF ceramic capacitor
12	2.2 µF ceramic capacitor
24	10 µF ceramic capacitor

EMC RECOMMENDED CIRCUIT

Test Condition

Input Voltage: Nominal

Output Load: Full Load

Figure 4 Conducted Emissions Test Circuit

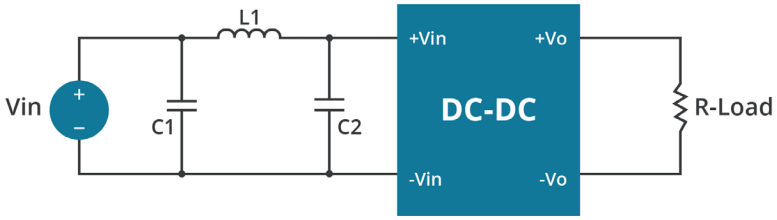

Table 3

EN55022 Class A Recommended External Circuit Components			
Model	C1[1]	C2[1]	L1
PCN2-S5-S5-S	4.7 µF / 50 V	NC	2.2 µH
PCN2-S5-S12-S	4.7 µF / 50 V	NC	2.2 µH
PCN2-S5-S15-S	10 µF / 25 V	NC	5.6 µH
PCN2-S5-D5-S	4.7 µF / 50 V	NC	2.2 µH
PCN2-S5-D12-S	4.7 µF / 50 V	NC	2.2 µH
PCN2-S5-D15-S	10 µF / 25 V	NC	5.6 µH
PCN2-S12-S5-S	10 µF / 25 V	NC	5.6 µH
PCN2-S12-S12-S	4.7 µF / 50 V	NC	5.6 µH
PCN2-S12-S15-S	4.7 µF / 50 V	NC	5.6 µH
PCN2-S12-D5-S	10 µF / 25 V	NC	5.6 µH
PCN2-S12-D12-S	4.7 µF / 50 V	NC	5.6 µH
PCN2-S12-D15-S	4.7 µF / 50 V	NC	5.6 µH
PCN2-S24-S5-S	4.7 µF / 50 V	4.7 µF / 50 V	5.6 µH
PCN2-S24-S12-S	4.7 µF / 50 V	4.7 µF / 50 V	5.6 µH
PCN2-S24-S15-S	4.7 µF / 50 V	4.7 µF / 50 V	5.6 µH
PCN2-S24-D5-S	4.7 µF / 50 V	4.7 µF / 50 V	5.6 µH
PCN2-S24-D12-S	4.7 µF / 50 V	4.7 µF / 50 V	5.6 µH
PCN2-S24-D15-S	4.7 µF / 50 V	4.7 µF / 50 V	5.6 µH

Notes: 1. Ceramic Capacitor

Table 4

EN55022 Class B Recommended External Circuit Components			
Model	C1[1]	C2[1]	L1
PCN2-S5-S5-S	10 µF / 25 V	NC	5.6 µH
PCN2-S5-S12-S	10 µF / 25 V	NC	5.6 µH
PCN2-S5-S15-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S5-D5-S	10 µF / 25 V	NC	5.6 µH
PCN2-S5-D12-S	10 µF / 25 V	NC	5.6 µH
PCN2-S5-D15-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S12-S5-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S12-S12-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S12-S15-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S12-D5-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S12-D12-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S12-D15-S	10 µF / 25 V	10 µF / 25 V	5.6 µH
PCN2-S24-S5-S	10 µF / 50 V	10 µF / 50 V	5.6 µH
PCN2-S24-S12-S	10 µF / 50 V	10 µF / 50 V	5.6 µH
PCN2-S24-S15-S	10 µF / 50 V	10 µF / 50 V	5.6 µH
PCN2-S24-D5-S	10 µF / 50 V	10 µF / 50 V	5.6 µH
PCN2-S24-D12-S	10 µF / 50 V	10 µF / 50 V	5.6 µH
PCN2-S24-D15-S	10 µF / 50 V	10 µF / 50 V	5.6 µH

Notes: 1. Ceramic Capacitor

REVISION HISTORY

rev.	description	date
1.0	initial release	07/26/2016
1.01	company logo updated	03/30/2021
1.02	derating, efficiency curves and circuit figures updated	07/09/2021

The revision history provided is for informational purposes only and is believed to be accurate.

CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com