

Sauls Wharf House Crittens Road Great Yarmouth Norfolk NR31 0AG Telephone +44 (0)1493 602602 Email:sales@midasdisplays.com Email:tech@midasdisplays.com www.midasdisplays.com

MC11606C6W-BNMLW 1 x 16		6mm Character Height	LCD Module					
Specification								
Version: 2 Date: 25/02/2016								
Revision								
1 2	12/08/2015 29/05/2019	First issue Modify Precautions in use of LCD Modules &	Static electricity test					

Display F	eatures		
Character Count	1 x 16		
Appearance	White on Blue		
Logic Voltage	5V		
Interface	Parallel		1
Font Set	English/Japanese		ROHS ompliant
Display Mode	Transmissive		ampliant
Character Height	6.56mm	C	ompliant
LC Type	STN Blue		
Module Size	85.00 x 28.00 x 13.50mm		
Operating Temperature	-20°C ~ +70°C		
Construction	COB	Box Quantity	Weight / Display
LED Backlight SIGN •	MANUFACTWhite	RESUP	PLY

\* - For full design functionality, please use this specification in conjunction with the ST7066U specification. (Provided Separately)

Display Accessories							
Part Number	Description						

Optional Variants						
Fonts	Appearances	Voltage				

#### **General Specification**

The Features is described as follow:

■ Module dimension: 85.0 x 28.0 x 13.5 (max.) mm

View area: 66.0 x 16.0 mm

Active area: 59.62 x 6.56 mm

■ Number of Characters: 16 characters x 1Lines

■ Dot size: 0.55 x 0.75 mm

■ Dot pitch: 0.63 x 0.83 mm

■ Character size: 3.07 x 6.56 mm

■ Character pitch: 3.77 x 6.56 mm

■ LCD type: STN Negative, Blue Transmissive

■ Duty: 1/16

■ View direction: 6 o'clock


■ Backlight Type: LED, White

■ IC: ST7066U


# **Interface Pin Function**


Pin No.	Symbol	Level	Description
1	Vss	0V	Ground
2	V <sub>DD</sub>	5.0V	Supply Voltage for logic
3	VO	(Variable)	Operating voltage for LCD
4	RS	H/L	H:DATA, L:Instruction code
5	R/W	H/L	H: Read (Module> MPU) L: Write(MPU> Module)
6	E	H,H→L	Chip enable signal
7	DB0	H/L	Data bus line
8	DB1	H/L	Data bus line
9	DB2	H/L	Data bus line
10	DB3	H/L	Data bus line
11	DB4	H/L	Data bus line
12	S <sub>DB5</sub> N	· MA	Data bus line TURE • SUPPLY
13	DB6	H/L	Data bus line
14	DB7	H/L	Data bus line

# **Contour Drawing & Block Diagram**

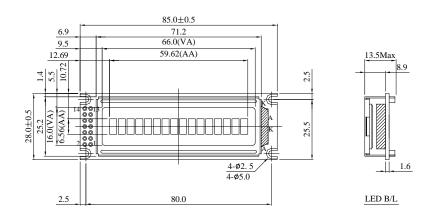

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	Vo
4	RS
5	$R/\overline{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7

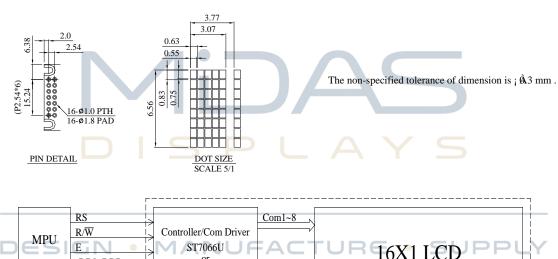

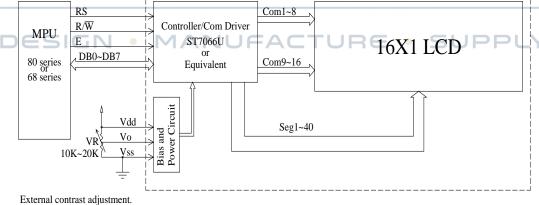

Character located 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 DDRAM address 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47

2-line display mode.

# **Character Generator ROM Pattern**

Table.2


Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	ньнн	HHLL	ннгн	НННГ	нннн
LLLL	CG RAM (1)					::::	**.	<b></b>					-===	***	# <u>`</u> :#	<b>!</b>
LLLH	(2)		-	-			-:::	-:::			===				-:::1	
LLHL	(3)		H								===		! <u>!</u> .!	.:-:		
LLHH	(4)				====	::	:				!			====	===-	=:-:=
LHLL	(5)						:!	-i-					i		II	
LHLH	(6)		::				:::::	ii			==				<b>=</b>	II
LHHL	(7)							ii					••••		 	=====
LHHH	(8)						:	I,.,I					::::		====	:I*I:
HLLL	(1)		*.	::		: : : · · · :	i				<u>-</u> -		=		1	====
HLLH	(2)	ES	ıgı	1		A	4 <u>1</u>	FA	CT	UF	RE		SU	PF	514	I[
HLHL	(3)			==	!		:							i		
НГНН	(4)			==				-=-				-1-1-	=		1-1	]==;
HHLL	(5)		:=	-:"							-[-::	∷_:		! <u>-</u> -	=:[:-	
HHLH	(6)						<b>!":</b> "	::-						=		
нннг	(7)						!·**!	:							<b>!</b> !	
нннн	(8)						::	-=:			: : :	÷			1 1	

### **Optical Characteristics**

Item	Symbol	Condition	Min	Тур	Max	Unit
View Angle	θ	CR≧2	0	_	20	ψ= 180°
	θ	CR≧2	0	_	40	ψ= 0°
	θ	CR≧2	0	_	30	ψ= 90°
	θ	CR≧2	0	_	30	ψ= 270°
Contrast Ratio	CR	_	_	3	_	_
Response Time	T rise	_	_	150	200	ms
	T fall	_	_	150	200	ms

**Definition of Operation Voltage (Vop)** 

Definition of Response Time ( Tr , Tf )

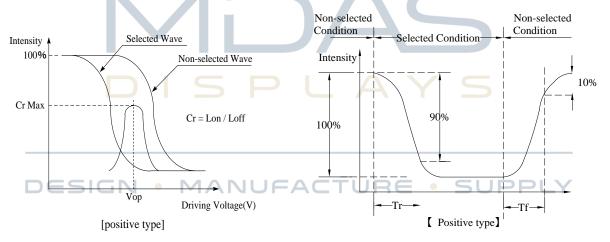


#### **Conditions:**

Operating Voltage : Vop Viewing Angle( $\theta$ ,  $\phi$ ) :  $0^{\circ}$ ,  $0^{\circ}$ 

Frame Frequency: 64 HZ Driving Waveform: 1/N duty, 1/a bias

#### **Definition of viewing angle(CR≧2)**

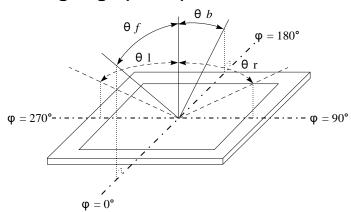


# **Absolute Maximum Ratings**

Item	Symbol	Min	Тур	Max	Unit
Operating Temperature	Тор	-20	_	+70	°C
Storage Temperature	T <sub>ST</sub>	-30	_	+80	°C
Input Voltage	Vı	Vss	_	$V_{DD}$	V
Supply Voltage For Logic	VDD-VSS	-0.3	_	7	V
Supply Voltage For LCD	V <sub>DD</sub> -V <sub>o</sub>	-0.3	_	13	V

### **Electrical Characteristics**

Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage For Log	ic V <sub>DD</sub> -V <sub>SS</sub>	b T	4.5	5.0	5.5	٧
Supply Voltage For LCI		Ta=-20°C	_	-	5.5	V
*Note	V <sub>DD</sub> -V <sub>0</sub>	Ta=25°C	4.2	4.35	4.5	V
DESIGN	• MANU	Ta=70°C	<b>3.5</b> ∈	•-s	UPP	LY
Input High Volt.	Vıн	_	0.7 V <sub>DD</sub>	_	V <sub>DD</sub>	V
Input Low Volt.	VIL	_	Vss	_	0.6	V
Output High Volt.	Voн	_	3.9	_	V <sub>DD</sub>	V
Output Low Volt.	Vol	_	0	_	0.4	V
Supply Current	IDD	V <sub>DD</sub> =5.0V	1.0	1.2	1.5	mA

<sup>\*</sup> Note: Please design the VOP adjustment circuit on customer's main board






# **Backlight Information**

#### **Specification**

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	ILED	_	32	40	mA	V=3.5V
Supply Voltage	V	3.4	3.5	3.6	v	_
Reverse Voltage	VR	_	_	5	v	_
Luminance	IV	496	620		CD/M <sup>2</sup>	ILED=32mA
(Without LCD)	IV	490	020		CD/IVI	ILED=32IIIA
LED Life Time						ILED=32mA
(For Reference	\ /	1:	50K	- /	Hr.	25℃,50-60%RH,
only)						(Note 1)
Color	White					/ 5

Note: The LED of B/L is drive by current only, drive voltage is for reference only. drive voltage can make driving current under safety area (current between minimum and maximum).

Note 1:50K hours is only an estimate for reference.

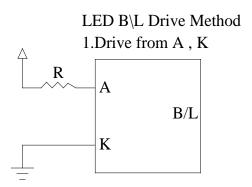

# Reliability

#### Content of Reliability Test (Wide temperature, -20°C~70°C)

	Environmental Test							
Test Item	Content of Test	Test Condition	Note					
High Temperature storage	Endurance test applying the high storage temperature for a long time.	200hrs	2					
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2					
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs						
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1					
High Temperature/ Humidity storage	The module should be allowed to stand at 60°C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C,90%RH 96hrs	1,2					
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation  -20°C 25°C 70°C  30min 5min 30min 1 cycle	-20°C/70°C 10 cycles						
	ISPLAY	Total fixed amplitude : 1.5mm						
Vibration test	Endurance test applying the vibration during transportation and using.	Vibration Frequency: 10~55Hz	3					
DESIGI	N • MANUFACTURE •	One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes						
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±600V(contact), ±800v(air), RS=330 Ω CS=150pF 10 times						

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

# Inspection specification

NO	Item	Criterion				
01	Electrical Testing	<ol> <li>1.1 Missing vertical, horizontal segment, segment contrast defect.</li> <li>1.2 Missing character, dot or icon.</li> <li>1.3 Display malfunction.</li> <li>1.4 No function or no display.</li> <li>1.5 Current consumption exceeds product specifications.</li> <li>1.6 LCD viewing angle defect.</li> <li>1.7 Mixed product types.</li> <li>1.8 Contrast defect.</li> </ol>				
02	Black or white spots on LCD (display only)	<ul><li>2.1 White and black spots on display ≤0.25mm, no more than three white or black spots present.</li><li>2.2 Densely spaced: No more than two spots or lines within 3mm</li></ul>				
03	LCD black spots, white spots, contamination (non-display)	3.1 Round type : As following drawing $\Phi = (x + y)/2$ $\Phi \le 0.10$ $0.10 < \Phi \le 0.20$ $0.20 < \Phi \le 0.25$ $0.25 < \Phi$ 3.2 Line type : (As following drawing) $\begin{array}{c ccccccccccccccccccccccccccccccccccc$	<del>-</del>			
04	Polarizer bubbles	If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction. $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	<b>-  </b>			

NO	Item	Criterion			
05	Scratches	Follow NO.3 LCD black spots, white spots, contamination			
		Symbols Define: x: Chip length y: 0 k: Seal width t: 0 L: Electrode pad length 6.1 General glass chip :	Chip width z: Chip t Glass thickness a: LCD	hickness Side length	
06	Chipped glass	z: Chip thickness $Z \le 1/2t$ $1/2t < z \le 2t$ $\odot \text{ If there are 2 or more}$	y: Chip width  Not over viewing area  Not exceed 1/3k  chips, x is total length of	x: Chip length x≤1/8a x≤1/8a  f each chip.	2.5
		6.1.2 Corner crack:			
	DESIG	N • MAN	WHITE THE PROPERTY OF THE PROP	y <sub>SUPPLY</sub>	
		z: Chip thickness	y: Chip width	x: Chip length	
		Z≦1/2t	Not over viewing area	x≦1/8a	
		1/2t < z ≦ 2t	Not exceed 1/3k	x≦1/8a	
		⊙ If there are 2 or more	chips, x is the total leng	th of each chip.	

NO	Item	Criterion			
		Symbols: x: Chip length k: Seal width L: Electrode pad ler 6.2 Protrusion over 6.2.1 Chip on electr	terminal:		
06	Glass	y: Chip width y≤0.5mm 6.2.2 Non-conductiv	x: Chip length x≤1/8a  ve portion:		2.5
	DES	must remai specificatio ⊙If the produ mark not be	x≤1/8a  ed area touches the ITO tento and be inspected according.	ne customer, the alignment ck.	

NO	Item	Criterion	AQL	
07	Cracked glass	The LCD with extensive crack is not acceptable.		
08	Backlight elements	<ul> <li>8.1 Illumination source flickers when lit.</li> <li>8.2 Spots or scratched that appear when lit must be judged. Using LCD spot, lines and contamination standards.</li> <li>8.3 Backlight doesn't light or color wrong.</li> </ul>	0.65 2.5 0.65	
09	Bezel	<ul><li>9.1 Bezel may not have rust, be deformed or have fingerprints, stains or other contamination.</li><li>9.2 Bezel must comply with job specifications.</li></ul>	2.5 0.65	
10	PCB · COB	<ul> <li>10.1 COB seal may not have pinholes larger than 0.2mm or contamination.</li> <li>10.2 COB seal surface may not have pinholes through to the IC.</li> <li>10.3 The height of the COB should not exceed the height indicated in the assembly diagram.</li> <li>10.4 There may not be more than 2mm of sealant outside the seal area on the PCB. And there should be no more than three places.</li> <li>10.5 No oxidation or contamination PCB terminals.</li> <li>10.6 Parts on PCB must be the same as on the production characteristic chart. There should be no wrong parts, missing parts or excess parts.</li> <li>10.7 The jumper on the PCB should conform to the product characteristic chart.</li> <li>10.8 If solder gets on bezel tab pads, LED pad, zebra pad or</li> </ul>	2.5 2.5 0.65 2.5 0.65	
		screw hold pad, make sure it is smoothed down.  10.9 The Scraping testing standard for Copper Coating of PCB  X * Y<=2mm2	2.5	
11	Soldering	<ul> <li>11.1 No un-melted solder paste may be present on the PCB.</li> <li>11.2 No cold solder joints, missing solder connections, oxidation or icicle.</li> <li>11.3 No residue or solder balls on PCB.</li> <li>11.4 No short circuits in components on PCB.</li> </ul>	2.5 2.5 2.5 0.65	

NO	Item	Criterion		
	General appearance	12.1 No oxidation, contamination, curves or, bends on interface Pin (OLB) of TCP.	2.5	
		12.2 No cracks on interface pin (OLB) of TCP.	0.65	
		12.3 No contamination, solder residue or solder balls on product.	2.5	
		12.4 The IC on the TCP may not be damaged, circuits.	2.5	
		12.5 The uppermost edge of the protective strip on the interface	2.5	
		pin must be present or look as if it cause the interface pin to		
		sever.	2.5	
12		12.6 The residual rosin or tin oil of soldering (component or chip		
		component) is not burned into brown or black color.	2.5	
		12.7 Sealant on top of the ITO circuit has not hardened.	0.65	
		12.8 Pin type must match type in specification sheet.	0.65	
		12.9 LCD pin loose or missing pins.	0.65	
		12.10 Product packaging must the same as specified on		
		packaging specification sheet.	0.65	
		12.11 Product dimension and structure must conform to product		
		specification sheet.		
		12.12 Visual defect outside of VA is not considered to be rejection.		

#### Precautions in use of LCD Modules

- Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- Don't disassemble the LCM. (3)
- (4) Don't operate it above the absolute maximum rating.
- Don't drop, bend or twist LCM. (5)
- Soldering: only to the I/O terminals. (6)
- Storage: please storage in anti-static electricity container and clean environment. (7)
- (8) MIDAS have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- (9) MIDAS have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, MIDAS have the right to modify the version.)
- (10) To ensure the stability of the display screen, please apply screen saver after showing 30 mins of fixed display content.

#### .Material List of Components for RoHs

1. MIDAS hereby declares that all of or part of products (with the mark

"#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A: The Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs
Limited Value	100 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm
Above limited value is set up according to RoHS.						

- 2.Process for RoHS requirement : (only for RoHS inspection)
  - (1) Use the Sn/Ag/Cu soldering surface; the surface of Pb-free solder is rougher than we used before.
  - (2) Heat-resistance temp. :

Reflow: 250°C,30 seconds Max.;

Connector soldering wave or hand soldering: 320°C, 10 seconds max.

(3) Temp. curve of reflow, max. Temp. : 235±5°C;

Recommended customer's soldering temp. of connector: 280°C, 3 seconds.

#### **Recommendable Storage**

- 1. Place the panel or module in the temperature 25°C±5°C and the humidity below 65% RH
- 2. Do not place the module near organics solvents or corrosive gases.
- 3. Do not crush, shake, or jolt the module.

