



# EMC/RFI line filter for lighting applications



- Excellent EMC filter for lighting applications
- Choice between 3 different leakage ratings C00/C11/C16:
- -C00: no leakage current, medical applications
- -C11: low leakage current, safety applications
- -C16: standard version, best filter performance
- Voltage rating up to 300 VAC
- Choice between 4 current ratings: 1 A, 2 A, 5 A and 8 A
- Compact, space-saving design
- Cable outlets with enhanced length give freedom for flexible installation

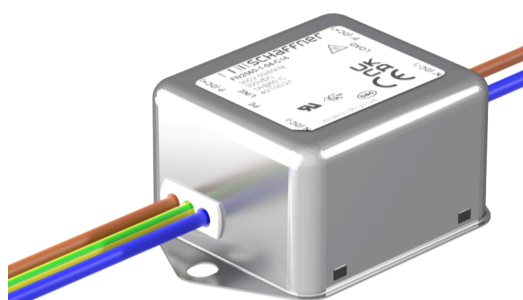

## Performance indicators

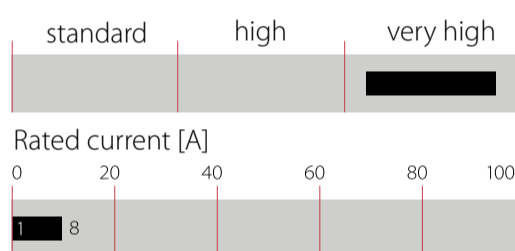

## Technical Specifications

<b>Maximum continuous operating voltage</b>	300 VAC / 300 VDC
<b>Rated currents</b>	1 A, 2 A, 5 A and 8 A @ 60°C
<b>Operating frequency</b>	DC to 60 Hz
<b>High potential test voltage</b>	P(DC+) → PE 3000 VDC for 2 sec P(DC+) → N(DC-) 1500 VDC for 2 sec
<b>Overvoltage category</b>	III acc. IEC 60664-1
<b>Pollution degree</b>	2 acc. IEC 60664-1
<b>Temperature range (operation and storage)</b>	-40°C to 100°C (40/100/21)*
<b>Climatic category</b>	40/100/21
<b>Cooling</b>	AN
<b>Altitude</b>	2000m (above derating applies)*
<b>Protection category</b>	IP20
<b>Flammability corresponding to</b>	Laces: UL94- VW1 Plastic material: UL-94V-0 Laces: UL94- VW1 Laces: UL94- VW1 Laces: UL94- VW1
<b>Vibration and shock</b>	3M4 (operation) 2M2 (transport) acc. to IEC 60721-3-3 IEC 60721-3-2
<b>Certified to</b>	UL 60939-3, IEC/EN 60939-3, GB/T 15287
<b>Design corresponding to</b>	IEC 61347-1 - Lamp controlgear IEC 61547 - Equipment for general lighting purposes
<b>MTBF (Mil-HB-217F)</b>	>1,800,000 h @ 60°C/277 V
<b>Terminals/Housing</b>	Single strand solid wires AWG16 / AWG18

\* for dedicated requests exceeding this specification, please contact your local Schaffner sales office

## Approvals & Compliances




## Features and Benefits

- Very high differential mode attenuation
- Suitable for AC and DC applications
- Offering a very high differential and common mode performance in low profile housing
- Easy installation with single strand wires
- Voltage rating according to high voltage LED lighting market

## Typical Applications

- Lighting equipment
- LED driver and displays
- Street lamps and signage
- Industrial and architectural lighting
- Fluorescent ballasts
- Other applications with high demand for differential mode performance

## Typical electrical schematic

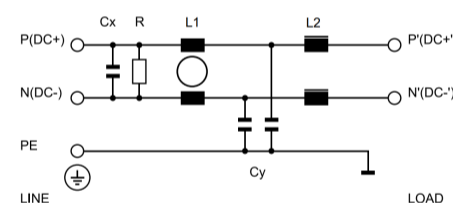

### Filter Selection Table

Filter	Rated current	Rated current	Leakage current*	Inductance**		Capacitance**		Dis. Resistor**	Weight	Typ. Dissipation
	@ 60°C	@ 40°C		L1	L2	Cx	Cy			
	[A]	[A]	[mA]	[mH]	[uH]	[µF]	[nF]	[kΩ]	[g]	[W]
<b>FN2560-1-04-C00</b>	1	1	0.0	4.0	198	0.470	-	1000	119	0.54
<b>FN2560-1-04-C11</b>	1	1	0.4	4.0	198	0.470	2 x 4.7	1000	119	0.54
<b>FN2560-1-04-C16</b>	1	1	3.1	4.0	198	0.470	2 x 33	1000	119	0.54
<b>FN2560-2-04-C00</b>	2	3	0.0	2.0	98	0.470	-	1000	125	1.52
<b>FN2560-2-04-C11</b>	2	3	0.4	2.0	98	0.470	2 x 4.7	1000	125	1.52
<b>FN2560-2-04-C16</b>	2	3	3.1	2.0	98	0.470	2 x 33	1000	125	1.52
<b>FN2560-5-04-C00</b>	5	6	0.0	1.0	51	0.470	-	1000	130	2.65
<b>FN2560-5-04-C11</b>	5	6	0.4	1.0	51	0.470	2 x 4.7	1000	130	2.65
<b>FN2560-5-04-C16</b>	5	6	3.1	1.0	51	0.470	2 x 33	1000	130	2.65
<b>FN2560-8-04-C00</b>	8	10	0.0	0.5	26	0.470	-	1000	135	3.45
<b>FN2560-8-04-C11</b>	8	10	0.4	0.5	26	0.470	2 x 4.7	1000	135	3.45
<b>FN2560-8-04-C16</b>	8	10	3.1	0.5	26	0.470	2 x 33	1000	135	3.45


\* Maximum leakage under usual AC operating conditions (acc. IEC 60939-3), calculated at 50Hz. If the neutral line is interrupted, worst case leakage could reach twice this level.

\*\* Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%

### Performance Adaptations Available

- Series for reduced reactive currents: FN2564  
 All FN2560 designations can also be ordered without X-capacitor. For example: FN2564-1-04-C00  
 - Pro: Lower reactive currents P (DC+) and N(DC-)  
 - Con: Lower differential mode attenuation performance
- Options with adapted leakage currents (on request)  
 Additionally to the existing C00, C11 and C16 options, 10 other Y-capacitor options (0.47 - 22 nF) are available.  
 For FN2560 and FN2564 series  
 - Pro: Fine adaptation of leakage current between 0.00 mA and 3.11 mA  
 - Con: -

### Mechanical Data

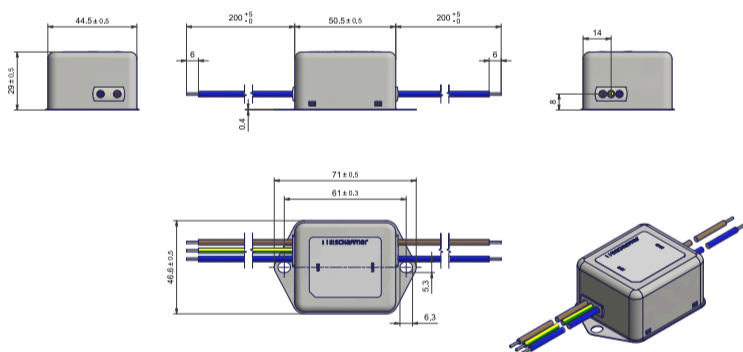


1 A - 5 A: Single strand solid wire 18 AWG  
 8 A : Single strand solid wire 16 AWG

All dimensions in mm; 1 inch = 25.4 mm Tolerances according: ISO 2768-m/EN 22768-m


### Typical Filter Attenuation

Per CISPR 17; DM=50 Ω/50 Ω sym, differential mode; CM=50 Ω/50 Ω asym, common mode


FN2560-1-04-C00 - no Y-Capacitor

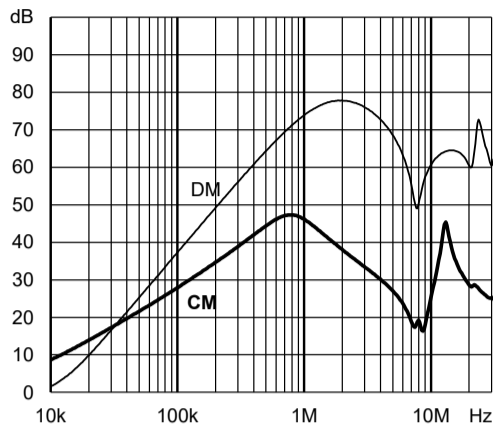


FN2560-1-04-C11 - 2 x 4.7 nF Y-Capacitor

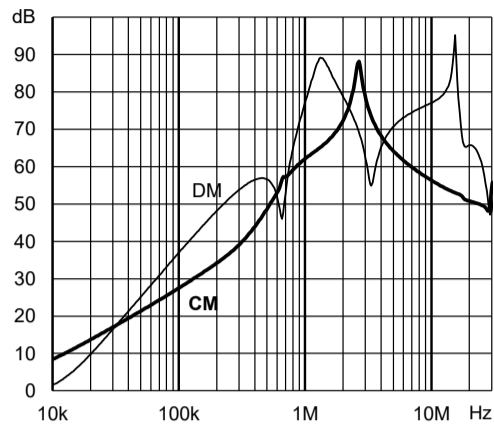


FN2560-1-04-C16 - 2 x 33 nF Y-Capacitor

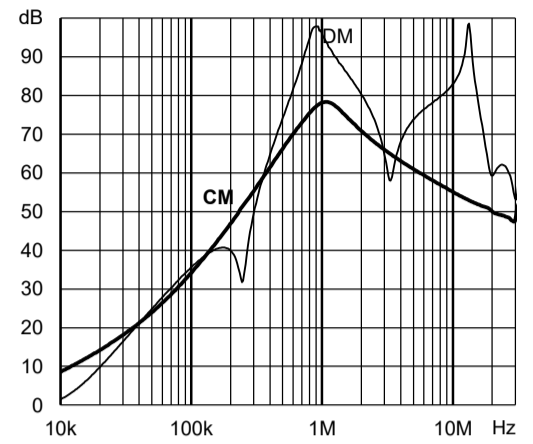


FN2560-2-04-C00 - no Y-Capacitor

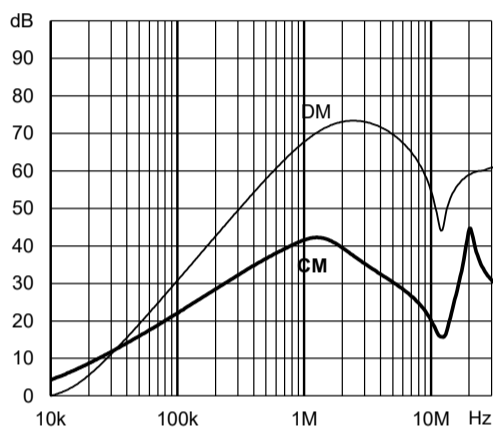


FN2560-2-04-C11 - 2 x 4.7 nF Y-Capacitor

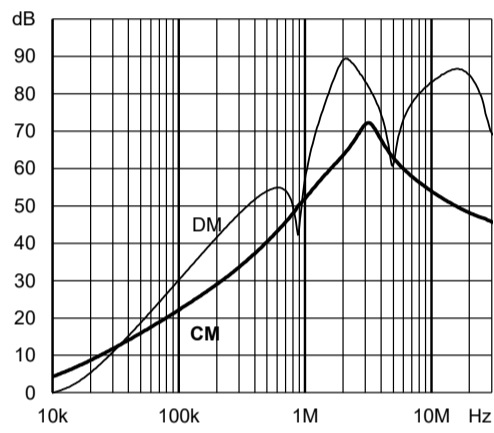


FN2560-2-04-C16 - 2 x 33 nF Y-Capacitor

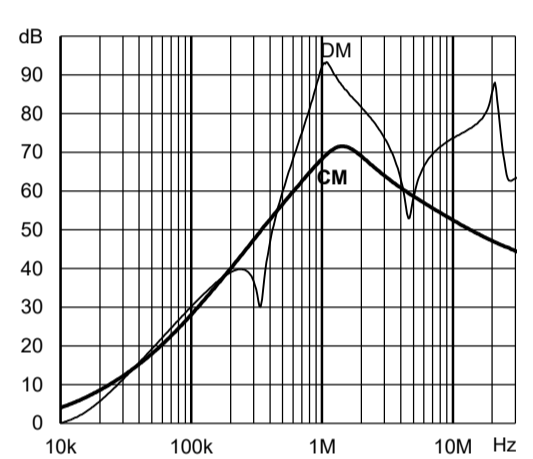


FN2560-5-04-C00 - no Y-Capacitor

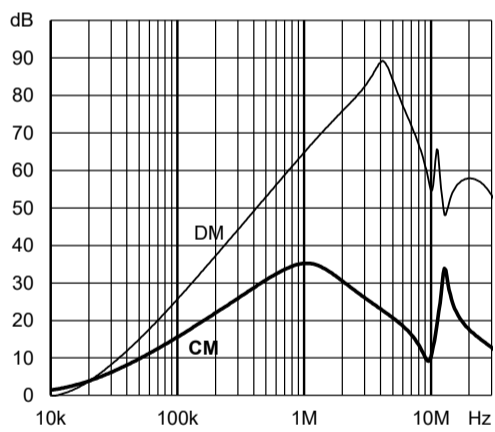


FN2560-5-04-C11 - 2 x 4.7 nF Y-Capacitor

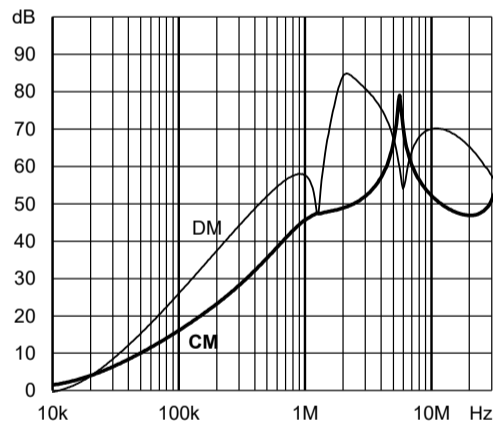


FN2560-5-04-C16 - 2 x 33 nF Y-Capacitor

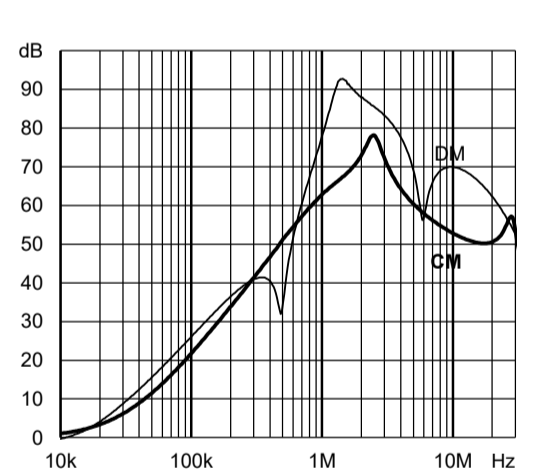


FN2560-8-04-C00 - no Y-Capacitor

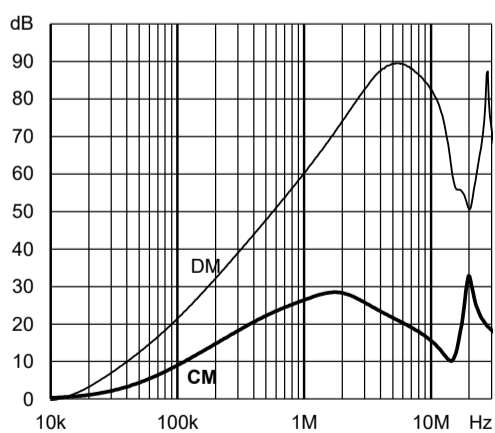

FN2560-8-04-C11 - 2 x 4.7 nF Y-Capacitor

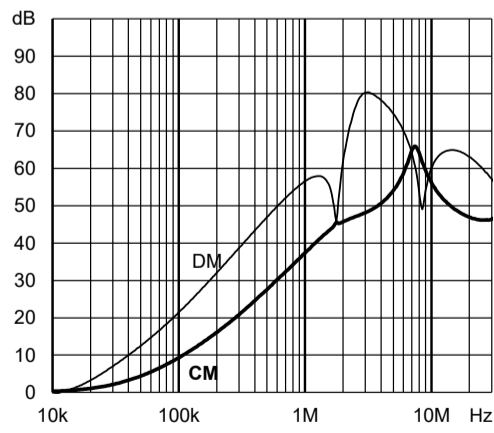

FN2560-8-04-C16 - 2 x 33 nF Y-Capacitor

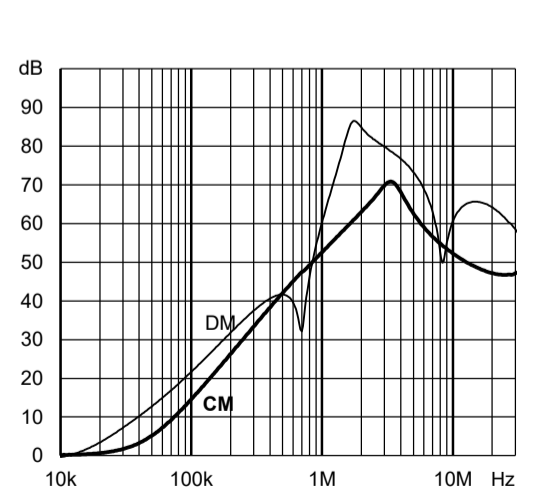

## Headquarters, Global Innovation and Development

### Switzerland

**Schaffner Group**  
Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

## Sales and Application Centers

### Finland

**Schaffner Oy**  
Lohjanharjuntie 1109  
08500  
Lohja  
+ 358 50 468 72 84  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

### France

**Schaffner EMC S.A.S.**  
16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

### Germany

**Schaffner Deutschland GmbH**  
Ohiostr. 8  
76149  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

### Italy

**Schaffner EMC S.r.l.**  
Via Ticino, 30  
20900  
Monza (MB)  
+39 039 21 41 070  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

### Japan

**Schaffner EMC K.K.**  
ISM Sangenjaya 7F  
1-32-12 Kamiyama Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

### Singapore

**Schaffner EMC Pte Ltd.**  
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi  
Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

### Sweden

**Schaffner EMC AB**  
Östermalmstrorg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

### Switzerland

**Schaffner EMV AG**  
Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### India

**Schaffner India Pvt. Ltd**  
Regus World Trade Centre  
WTC 22nd Floor Unit No 2238 Brigade  
Gateway Campus 26/1 Dr. Rajkumar Road  
Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

### United Kingdom

**Schaffner Ltd.**  
Suite 1 Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[uksales@schaffner.com](mailto:uksales@schaffner.com)

### United States

**Schaffner EMC Inc.**  
52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)

To find your local partner within Schaffner's global network [schaffner.com](http://schaffner.com)

© 2024 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.