


## Single Output 600W Programmable Medical and Industrial Power Supplies

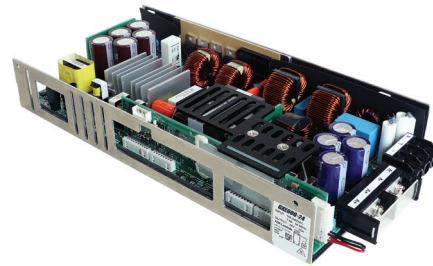

With efficiencies up to 95%, the medical and industrial certified GXE600 is rated at 600W with convection cooling for low audible noise. The output voltage and current can be programmed and set for constant current or constant voltage characteristics. The Modbus RTU serial protocol is used for data transmission due its high interference immunity within noisy industrial environments. The parameters for fault programming (protection level and recovery characteristics) and the slew rate timing can be changed. Remaining electrolytic capacitor life, operating hours and alarm history can be read through the RS-485 interface, aiding remote preventative maintenance. As standard the GXE600 has a 5V 1A standby voltage, isolated DC Good and AC Fail signals, remote on/off and paralleling capability for up to five units.

Features	Benefits
• Convection Cooled	• Quiet Operation
• Up to 95% Efficient	• Lower Operating Costs
• RS-485 Read-Write Communication (Modbus RTU protocol)	• Applicable for Communication in Industrial Applications
• Constant Voltage & Constant Current Modes	• Versatile Use
• Monitoring & Programming Functions	• Allows Remote Monitoring and Operation
• Digital or Analog Programming	• Easier System Integration
• Seven Year Warranty <sup>(1)</sup>	• Low Cost of Ownership

Model Selector						
Model	Nominal Output Voltage (V)	Output Adjustment Manual (V)	Output Adjustment Programming <sup>(2)</sup> (V)	Maximum Current (A)	Maximum Power (W)	Efficiency (typ %) 115 / 230Vac
GXE600-24	24	19.2 - 28.8	4.8 - 28.8	25	600	92 / 95
GXE600-48	48	38.4 - 57.6	9.6 - 57.6	12.5	600	92 / 95

<b>GXE600-</b>	<b>24</b>	<b>/</b>	<b>A</b>
	Output voltage 24, 48		blank U channel chassis /A U channel chassis with cover /HD U channel chassis, ruggedized & pcb coating /HDA U channel chassis with cover, ruggedized & pcb coating

Specifications				
Model	GXE600-24		GXE600-48	
<b>Input</b>				
Input Voltage Range <sup>(3)</sup> (Operating)	Vac	85 - 265. Withstands 300 for 5s		
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 90-264Vac)		
Input Frequency	Hz	47 - 63		
Input Current (typ) (115/230Vac)	A	6.1 / 3.1		
Inrush Current (typ 100/200Vac) (Cold Start)	A	40 / 40		
Leakage Current (Maximum)	mA	<0.3		
Power Factor (115/230Vac)	-	0.99 / 0.95		
Harmonic Compliance	-	Meets EN61000-3-2		
No Load Power Consumption	W	3.4 at 100Vac. 1.2 at 200Vac when remote on/off is activated and no load on 5Vsb		
Hold Up Time (typ) at 115 / 230Vac Input	ms	20		
Efficiency	-	See model selector		
Conducted & Radiated EMI	-	EN55011-B, EN55032-B, FCC Class B		
Immunity	-	IEC61000-4-2, IEC60601-1-2 Ed4. See immunity table		
Insulation Class	-	Class I		
Safety Certifications and Markings	-	IEC/UL/ES/CSA/EN60601-1, IEC/UL/CSA/EN62368-1, 60950-1, CE Mark and UKCA Mark		

Immunity				
Test	Standard	Test Level	Criteria	Notes
ESD	EN61000-4-2	Air $\pm 8$ kV and contact $\pm 4$ kV	A	See website for immunity test report
Radiated Susceptibility	EN61000-4-3	80M -1GHz: 10V/m 1.4 - 2.0GHz: 3V/m 2.0 - 2.7GHz: 1V/m	A	
Electrical Fast Transient Burst	EN61000-4-4	$\pm 2$ kV	A	
Surge	EN61000-4-5	Normal $\pm 1$ kV	A	
Conducted Susceptibility	EN61000-4-6	10Vrms	A	
Magnetic Fields	EN61000-4-8	30A/m	A	
Voltage Dips	EN61000-4-11	30% 500ms	A	
Voltage Dips	EN60601-1-2	30% 500ms	A	
SEMI F47 Line Dip	SEMI F47	-	-	At input voltages > 200Vac

Specifications				
Model	GXE600-24		GXE600-48	
<b>Output</b>				
Switching Frequency	kHz	134, PFC 100		
Line Regulation	mV	96	192	
Load Regulation	mV	144	288	
External Load Capacitance	$\mu$ F	10,000		
Ripple & Noise	mV	150	350	
Temperature Coefficient	%/°C	<0.02%/°C		
Minimum Load	-	No minimum load required		
Overcurrent Protection (Factory Set)	A	>27.5	>13.8	
Overcurrent Protection (Via Programming) <sup>(2,4)</sup>	A	5 - 28.8	2.5 - 14.4	
Overvoltage Protection (Via Programming) <sup>(4)</sup>	V	28.8 - 31.2	57.6 - 62.4	
Remote Sense	-	Yes		
Remote On/Off	-	Isolated opto-coupler. Unit off when current is flowing through the opto diode		
Power Fail Signal	-	Signal is high when the output voltage drops due to AC loss or OCP, OVP, OTP		
AC Fail Signal	-	Signal goes high when the AC input is not present		
Standby Voltage	V / A	4.8V - 5.2V 1A		
Indicators	-	DC OK		
Parallel Operation	-	Up to five units		

Specifications				
Model	GXE600-24		GXE600-48	
<b>Environmental</b>				
Operating Temperature	°C	-20 to +70. Derate linearly to 50% load from +50 to +70 <sup>(5)</sup>		
Storage Temperature	°C	-40 to +85		
Humidity (non condensing)	%RH	Operating: 20 - 90 Storage: 10 - 90		
Pollution Degree	-	PD 2		
Cooling	-	Convection or Forced Air Cooled		
Altitude	m	5000 (IEC 62368-1), 4000 (IEC 60601-1)		
Withstand Voltage (For 1 minute)	Vac	Input to Ground 2,000 (1xMOPP), Input to Output 4,000 (2xMOPPs), Output to Ground 1,500 (1xMOPP)		
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500Vdc		
Vibration (Non Operating)	-	10 - 55Hz: 19.6m/s <sup>2</sup> constant sweep 1 min X, Y, Z for 1 hour /HD version: Designed to meet MIL-STD-810G 514.7 Category 4, 10		
Shock	-	< 196.1 m/s <sup>2</sup> , /HD version: Designed to meet MIL-STD-810G 516.7 Procedure I, VI		
<b>Other</b>				
Weight (Typ)	g	1300, 1400 with cover		
Size (LxWxH)	mm	254 x 127 x 41, /A model 254 x 127.5 x 50		
Size (LxWxH)	Inches	10 x 5 x 1.61, /A model: 10 x 5.02 x 1.97		
Case Material	-	Aluminum		
Connectors	-	Screw Terminals. See detailed outline drawings on website for signal connectors		
MTBF - Telcordia SR-332 issue 3*	Hours	511,677		
Warranty	Years	7 <sup>(1)</sup>		

Notes

See website for detailed specifications, test methods and installation manual

(1) The Americas and EMEA regions: 7 years. Other regions: 5 years. See applicable regional terms of sale.

(2) Using RS-485 communications or external 1-6V voltage source. See installation manual for details

(3) 85Vac: 360W, 100 to <170Vac: 500W, 170V to 265Vac: 600W (Convection cooled), 600W when forced air is applied (see installation manual)


(4) Overcurrent & Overvoltage limits and recovery modes can be set using the RS-485 communications

(5) Models with cover (/A option) have additional derating. See derating curves in the instruction manual


\*24V output model, 25°C ambient, full load, 230Vac input

Monitoring and Programming Functions		
Function	Digital (RS-485) Control	Analog Control
Output Voltage Monitor	Read back	No
Output Current Monitor	Read back	No
Output Voltage Programming	Adjustable	Adjustable, use a 1-6V external voltage source
Output Current Programming	Adjustable	Adjustable, use a 1-6V external voltage source
Over Voltage Protection Set Point	Adjustable	Fixed
Over Voltage Recovery	Auto-recovery or manual settings	Cycle AC input or use the remote on/off
Over Current Set Point	Adjustable	Fixed
Over Current Recovery	Auto recovery: Constant current, hiccup or foldback Latching: Constant current or foldback	Constant current, auto-recovery
Over Temperature Recovery	Cycle AC input or use the remote on/off	Cycle AC input or use the remote on/off
Remote On/Off	Yes, enable or inhibit type	Yes, enable or inhibit type
Internal Temperature Monitoring	Yes, -20 to +100°C	No
Operating Run Time Log	Records more than 20 years of data	No
Remaining Electrolytic Capacitor Life	Indicates hours left	No
Alarm History	OCP, OVP, OTP, remote on/off, system error	No
Slew Rate (Rise-time) Control	Voltage and current	No
Communication Configuration	ID, Baud Rate, Parity	Not applicable
Product Information	Model #, serial #, lot #, firmware version	Not applicable
Power Fail Signal Threshold	Adjustable for either output voltage or current	Fixed (voltage only)

Outline Drawing GXE600

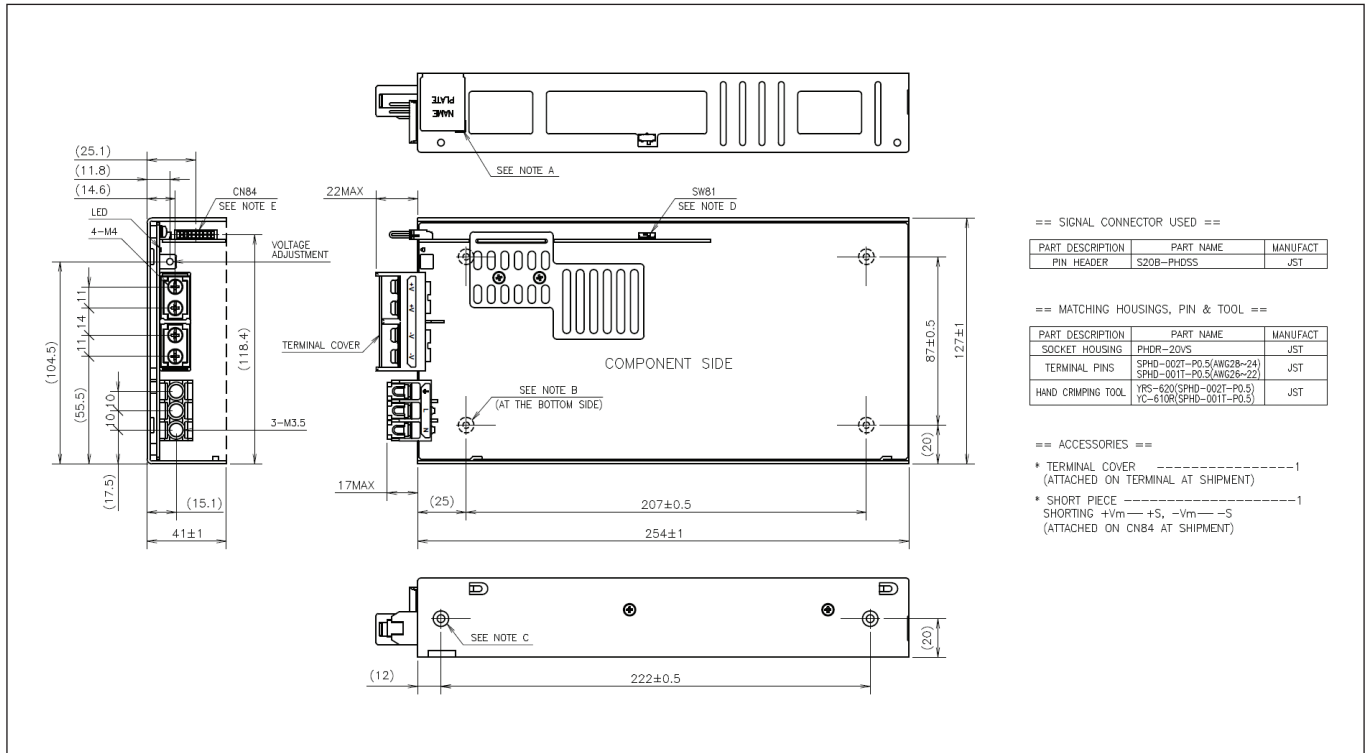

Outline Drawing GXE600/A

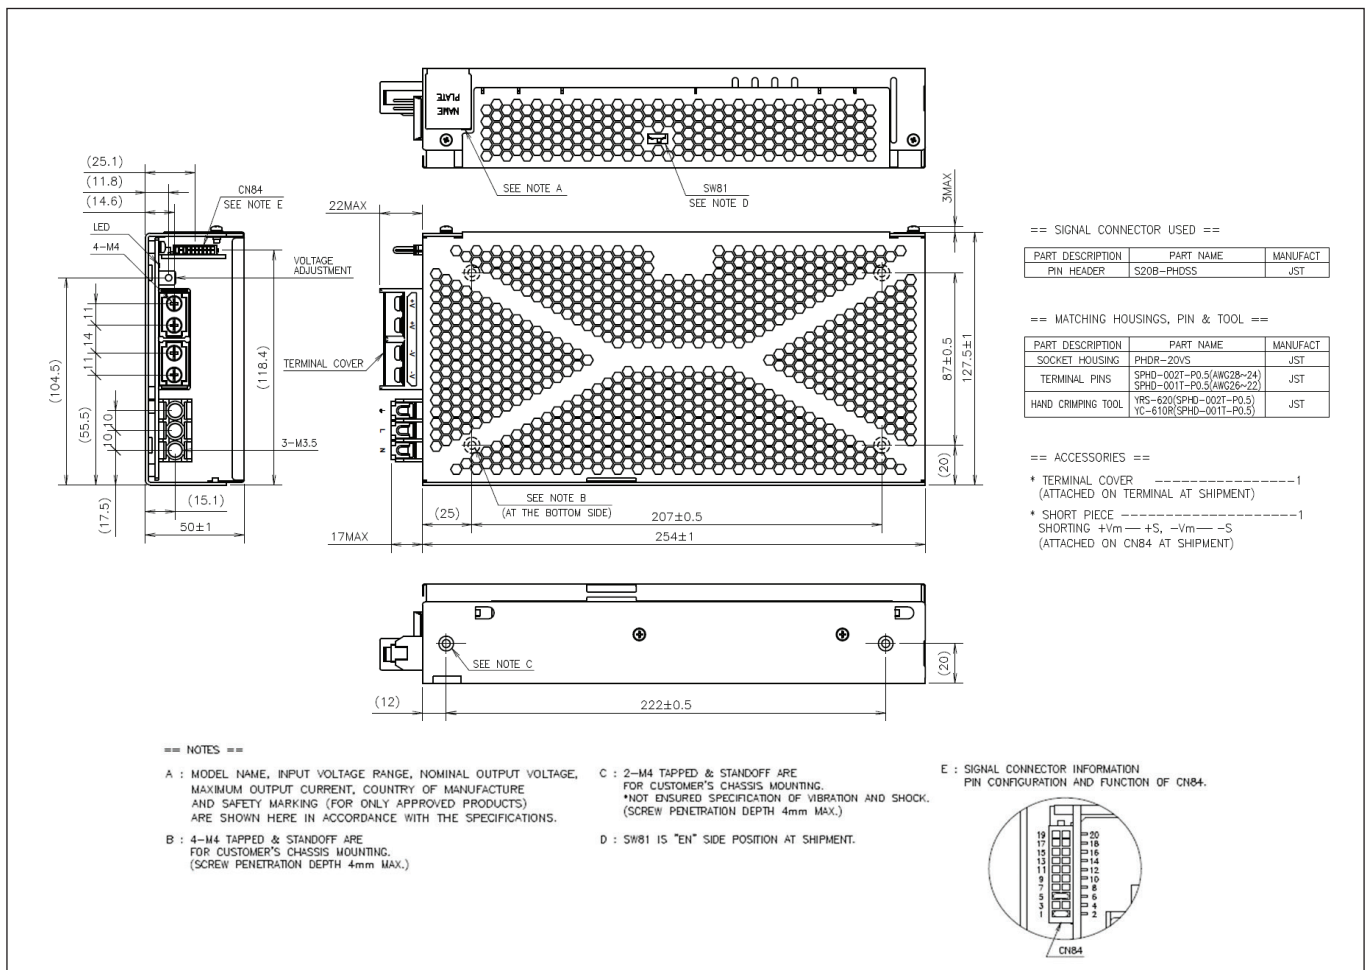



### TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
 tlf.fr-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



### Italy Sales Office

Tel: +39 02 61 29 38 63  
 tlf.it-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



### Netherlands

tlf.nl-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



### TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
 tlq.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



### Austria Sales Office

Tel: +43 2256 655 84  
 tlq.at-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



### Switzerland Sales Office

Tel: +41 44 850 53 53  
 tlq.ch-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



### Nordic Sales Office

Tel: +45 8853 8086  
 tlq.dk-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



### TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



### TDK-Lambda Ltd.

Tel: +9 723 902 4333  
 tli.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



### TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tla.powersolutions@tdk.com  
 www.us.lambda.tdk.com



### TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



### TDK-Lambda Corporation

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



### TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



### TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
 tfs.marketing@tdk.com  
 www.sg.lambda.tdk.com



### TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

