


MOV Varistor

Round, 14mm

multicomp **PRO**

RoHS
Compliant

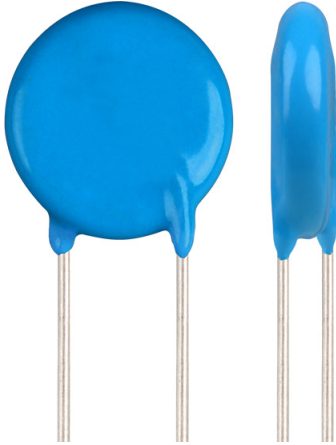

Description

Metal Oxide Varistor (MOV) as one nonlinear resistance element is mainly made of zinc oxide (ZnO), which has very high surge capacity and big nonlinear coefficient. Below the threshold voltage, its resistance is very high, nearly no current flows through, but above the threshold voltage, the resistance reduces sharply, huge current can be discharged. Due to this characteristic, varistor as a protection component in electronic and electrical equipment can absorb abnormal over-voltage and lightning surge.

Varistor is with High Surge Current Density, Low Clamping Voltage, and Good Surge Capacity.


Applications

- Power Supplies
- Home Electrical Appliances
- Industrial Devices
- Surge Protectors
- Telecom Devices


Features

- Epoxy Resin Coating
- Silicone Resin Coating
- Low Leakage Current
- Bidirectional and Symmetrical V/I Characteristics
- Operating Temperature Range
- Low Temperature: -40°C
- High Temperature: $+85^{\circ}\text{C}$ to $+105^{\circ}\text{C}$

Product Structure

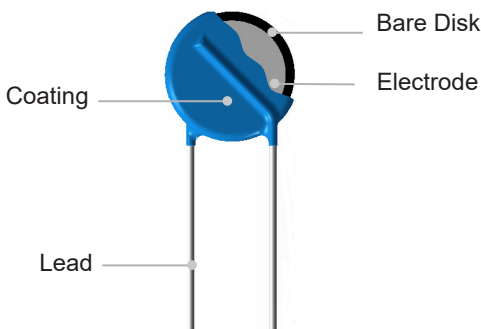

Temp. Derating Curve

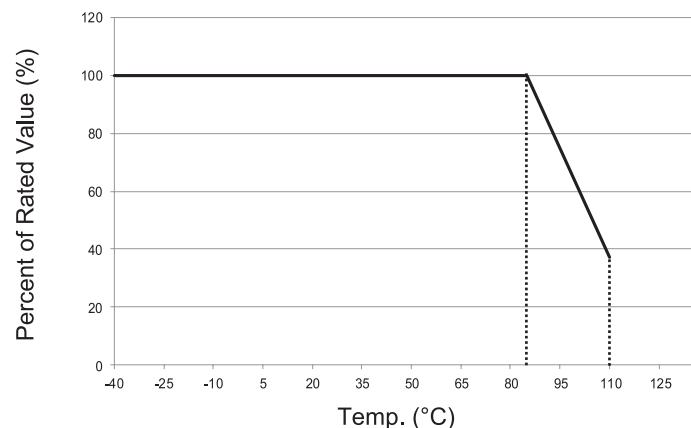

For Normal Temp. Series

Note:

When ambient Temp. exceeds 85°C , the peak surge current and energy rating should be reduced as shown in the left curve.

MOV Varistor

Round, 14mm


multicomp PRO

General Technical Data

Item	Value	Unit
Operating Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C
Voltage Proof	≥2500	Vac
Insulation Resistance	≥100	MΩ

Dimensions

Model	L (Min.)	H (Max.)	T (Max.)	D (Max.)	d	F	F ₁	A (Max.)
MPV14D101KNK	20	18.5	4.6	16.5	0.8 ±0.05	7.5 ±0.6	1.3 - 2.8	21.5
MPV14D112KNK			9.9				5.9 - 7.9	
MPV14D121KNK			4.8				1.4 - 3	
MPV14D151KNK			5.1				1.6 - 3.3	
MPV14D181KNK			4.5				1.3 - 2.8	
MPV14D201KNK			18.5				1.3 - 2.9	
MPV14D221KNK			4.7				1.4 - 3	
MPV14D241KNK			4.9				1.4 - 3.1	
MPV14D271KNK			5				1.5 - 3.3	
MPV14D361KNK			5.6				1.9 - 3.8	
MPV14D391KNK			5.7				2 - 4	
MPV14D431KNK			6				2.2 - 4.2	
MPV14D471KNK			6.2				2.4 - 4.4	
MPV14D511KNK			6.4				2.6 - 4.6	
MPV14D561KNK			6.7				2.9 - 4.9	
MPV14D621KNK			7.1				3.2 - 5.2	
MPV14D681KNS			7.4				3.6 - 5.6	
MPV14D751KNK			7.9				4 - 6	
MPV14D820KNK			4.4				1.2 - 2.6	
MPV14D911KNK			8.8				4.9 - 6.9	



Specification

Model	Surge Level	Max. Continuous Operating Voltage		Varistor Voltage @1 mA DC		Clamping Voltage (Max.)		Max. Peak Current (1 time, 8/20 μs)	Max. Energy (10/1000 μs)	Typical Capacitance (For reference only) @1 kHz	Agency Approvals				
		Vac	Vdc	Min.	Max.	VC	IP	K			(pF)	UL	cUL	TUV	CQC
		(V)	(V)	(V)	(V)	(V)	(V)	(kA)	(J)			•	•	•	•
MPV10D101KNK	S	420	560	612	748	1120	50	4.5	130	290	•	•	•	•	

● : Approved ○ : Unauthorized





Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO

MOV Varistor

Round, 14mm


Specification

Model	Max. Continuous Operating Voltage		Varistor Voltage @1 mA DC		Clamping Voltage (Max.)		Max. Peak Current (1 time, 8/20 μs)	Max. Energy (10/1000 μs)	Typical Capacitance (For reference only) @1 kHz	Agency Approvals							
	Vac	Vdc	Min.	Max.	VC	IP	K		(pF)								
	(V)	(V)	(V)	(V)	(V)	(V)	(kA)	(J)		UL	cUL	TUV	CQC				
MPV14D101KNK	60	85	90	110	165	50	6	35	2000	•	•	•	•				
MPV14D112KNK	680	895	990	1210	1815			280	180					○			
MPV14D121KNK	75	100	108	132	200			42	1700					•	•	•	•
MPV14D151KNK	95	125	135	165	250			53	1300								
MPV14D181KNK	115	150	162	198	300			60	1100								
MPV14D201KNK	130	170	180	220	340			70	1000								
MPV14D221KNK	140	180	198	242	360			78	900								
MPV14D241KNK	150	200	216	264	395			84	830								
MPV14D271KNK	175	225	243	297	455			99	740								
MPV14D361KNK	230	300	324	396	595			130	560								
MPV14D391KNK	250	320	351	429	650			140	510								
MPV14D431KNK	275	350	387	473	710			155	460								
MPV14D471KNK	300	385	423	517	775			175	430								
MPV14D511KNK	320	415	459	561	845			180	390								
MPV14D561KNK	350	460	504	616	925			185	360								
MPV14D621KNK	385	505	558	682	1025			190	320								
MPV14D681KNS	420	560	612	748	1120			200	290								
MPV14D751KNK	460	615	675	825	1240			210	270								
MPV14D820KNK	50	65	74	90	135			28	2400								
MPV14D911KNK	550	745	819	1001	1500			255	220								

● : Approved ○ : Unauthorized

Performance Curve

Max. Peak Current Derating Curves


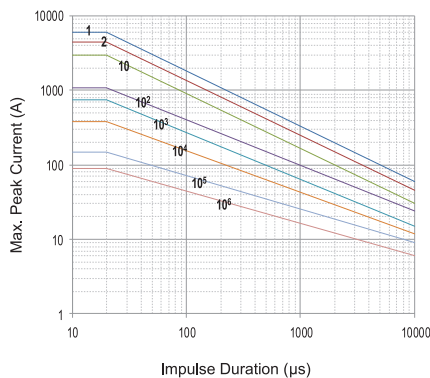


MP011874

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

MOV Varistor

Round, 14mm

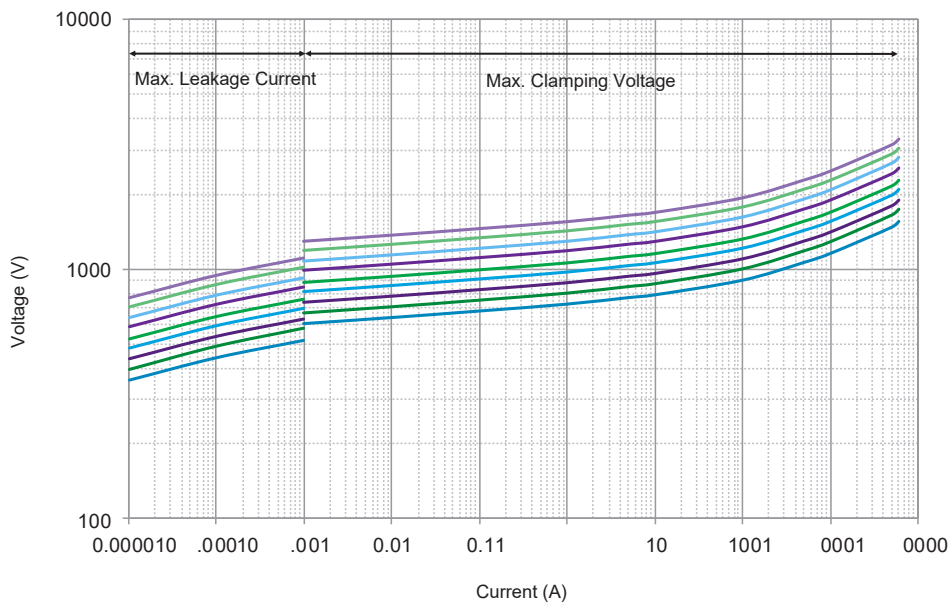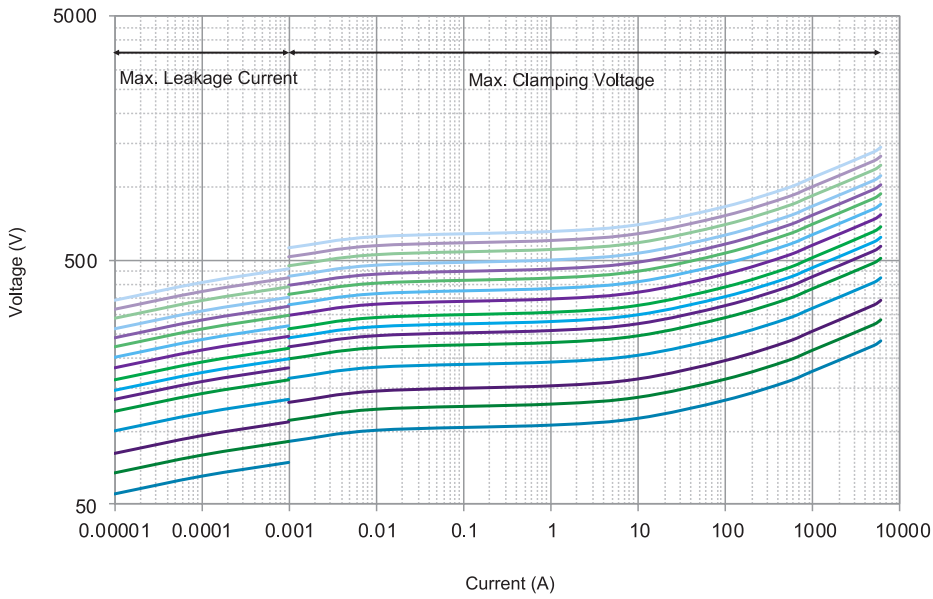

MOV Varistor

Round, 14mm

Part Number Table

Description	Part Number
Varistor, Standard Surge Level, 100V	MPV14D101KNK
Varistor, Standard Surge Level, 1100V	MPV14D112KNK
Varistor, Standard Surge Level, 120V	MPV14D121KNK
Varistor, Standard Surge Level, 150V	MPV14D151KNK
Varistor, Standard Surge Level, 180V	MPV14D181KNK
Varistor, Standard Surge Level, 200V	MPV14D201KNK
Varistor, Standard Surge Level, 220V	MPV14D221KNK
Varistor, Standard Surge Level, 240V	MPV14D241KNK
Varistor, Standard Surge Level, 270V	MPV14D271KNK
Varistor, Standard Surge Level, 360V	MPV14D361KNK
Varistor, Standard Surge Level, 390V	MPV14D391KNK
Varistor, Standard Surge Level, 430V	MPV14D431KNK
Varistor, Standard Surge Level, 470V	MPV14D471KNK
Varistor, Standard Surge Level, 510V	MPV14D511KNK
Varistor, Standard Surge Level, 560V	MPV14D561KNK
Varistor, Standard Surge Level, 620V	MPV14D621KNK
Varistor, Standard Surge Level, 680V	MPV14D681KNS
Varistor, Standard Surge Level, 750V	MPV14D751KNK
Varistor, Normal Surge Level, 82V	MPV14D820KNK
Varistor, Standard Surge Level, 910V	MPV14D911KNK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.