

EMI-Ferrite Bead



BB0061BED-KIT JIS 0603, 1005 Size

Designer Kit Contents

Pulse - Std Power Part Number	L (mm)	W(mm)	T (mm)	SIZE Code (JIS/EIA)	Impedance Ω (at 100MHz)	Tolerance ($\pm\%$)	RDC(Ω) Max.	Rated Current (mA)	Quantity
BBNQ00060303100Y00	0.6	0.3	0.3	0603	10	25	0.4	300	20
BBNQ00060303220Y00	0.6	0.3	0.3	0603	22	25	0.5	200	20
BBPY00060303220Y00	0.6	0.3	0.3	0603	22	25	0.065	1000	20
BBPY00060303330Y00	0.6	0.3	0.3	0603	33	25	0.09	750	20
BBSJ00060303600Y00	0.6	0.3	0.3	0603	60	25	0.3	200	20
BBSY00060303600Y00	0.6	0.3	0.3	0603	60	25	0.4	200	20
BBPY00060303800Y00	0.6	0.3	0.3	0603	80	25	0.18	500	20
BBPY00060303121Y00	0.6	0.3	0.3	0603	120	25	0.23	450	20
BBSJ00060303121Y00	0.6	0.3	0.3	0603	120	25	0.5	250	20
BBSY00060303121Y00	0.6	0.3	0.3	0603	120	25	0.5	200	20
BBPY00060303241Y00	0.6	0.3	0.3	0603	240	25	0.4	350	20
BBSJ00060303241Y00	0.6	0.3	0.3	0603	240	25	0.8	220	20
BBSY00060303241Y00	0.6	0.3	0.3	0603	240	25	0.8	200	20
BBPY0006030331Y00	0.6	0.3	0.3	0603	330	25	0.5	300	20
BBPY00100505100Y00	1.0	0.5	0.5	1005	10	25	0.03	2000	20
BBSY00100505100Y00	1.0	0.5	0.5	1005	10	25	0.025	1000	20
BBSY00100505110Y00	1.0	0.5	0.5	1005	11	25	0.05	500	20
BBNQ00100505220Y00	1.0	0.5	0.5	1005	22	25	0.25	400	20
BBSY00100505220Y00	1.0	0.5	0.5	1005	22	25	0.15	500	20
BBPY00100505250Y00	1.0	0.5	0.5	1005	25	25	0.05	1700	20
BBPY00100505300Y00	1.0	0.5	0.5	1005	30	25	0.05	1700	20
BBSY00100505300Y00	1.0	0.5	0.5	1005	30	25	0.2	500	20
BBUP00100505300Y00	1.0	0.5	0.5	1005	30	25	0.022	3000	20
BBPY00100505320Y00	1.0	0.5	0.5	1005	32	25	0.05	1700	20
BBSY00100505320Y00	1.0	0.5	0.5	1005	32	25	0.2	500	20
BBSY00100505330Y00	1.0	0.5	0.5	1005	33	25	0.2	500	20
BBUP00100505330Y00	1.0	0.5	0.5	1005	33	25	0.022	3000	20
BBPY00100505400Y00	1.0	0.5	0.5	1005	40	25	0.05	1500	20
BBSY00100505400Y00	1.0	0.5	0.5	1005	40	25	0.2	500	20
BBNQ00100505470Y00	1.0	0.5	0.5	1005	47	25	0.3	400	20
BBSY00100505470Y00	1.0	0.5	0.5	1005	47	25	0.2	500	20
BBPY00100505500Y00	1.0	0.5	0.5	1005	50	25	0.05	1500	20
BBSY00100505500Y00	1.0	0.5	0.5	1005	50	25	0.2	500	20
BBPY00100505600Y00	1.0	0.5	0.5	1005	60	25	0.075	1500	20
BBSJ00100505600Y00	1.0	0.5	0.5	1005	60	25	0.2	500	20
BBSY00100505600Y00	1.0	0.5	0.5	1005	60	25	0.2	500	20
BBUP00100505600Y00	1.0	0.5	0.5	1005	60	25	0.032	2500	20
BBPY00100505680Y00	1.0	0.5	0.5	1005	68	25	0.09	1200	20
BBPY00100505700Y00	1.0	0.5	0.5	1005	70	25	0.09	1200	20
BBSY00100505700Y00	1.0	0.5	0.5	1005	70	25	0.15	600	20
BBNQ00100505750Y00	1.0	0.5	0.5	1005	75	25	0.3	400	20
BBSY00100505750Y00	1.0	0.5	0.5	1005	75	25	0.2	500	20
BBPY00100505800Y00	1.0	0.5	0.5	1005	80	25	0.09	1200	20
BBSY00100505800Y00	1.0	0.5	0.5	1005	80	25	0.2	500	20
BBUP00100505800Y00	1.0	0.5	0.5	1005	80	25	0.038	2300	20
BBPY00100505101Y00	1.0	0.5	0.5	1005	100	25	0.09	1200	20
BBSY00100505101Y00	1.0	0.5	0.5	1005	100	25	0.25	500	20
BBFY00100505121YHP	1.0	0.5	0.5	1005	120	25	0.095	1500	20
BBNQ00100505121Y00	1.0	0.5	0.5	1005	120	25	0.4	350	20
BBPY00100505121Y00	1.0	0.5	0.5	1005	120	25	0.09	1400	20

EMI-Ferrite Bead



BB0061BED-KIT JIS 0603, 1005 Size

Designer Kit Contents

Pulse - Std Power Part Number	L (mm)	W(mm)	T (mm)	SIZE Code (JIS/EIA)	Impedance Ω (at 100MHz)	Tolerance ($\pm\%$)	RDC(Ω) Max.	Rated Current (mA)	Quantity
BBSJ00100505121Y00	1.0	0.5	0.5	1005	120	25	0.25	500	20
BBSY00100505121Y00	1.0	0.5	0.5	1005	120	25	0.19	550	20
BBUP00100505121Y00	1.0	0.5	0.5	1005	120	25	0.055	2000	20
BBPY00100505151Y00	1.0	0.5	0.5	1005	150	25	0.14	1400	20
BBSY00100505151Y00	1.0	0.5	0.5	1005	150	25	0.4	400	20
BBPY00100505181Y00	1.0	0.5	0.5	1005	180	25	0.14	900	20
BBSY00100505181Y00	1.0	0.5	0.5	1005	180	25	0.4	400	20
BBUP00100505181Y00	1.0	0.5	0.5	1005	180	25	0.09	1500	20
BBFY00100505221YHP	1.0	0.5	0.5	1005	220	25	0.28	700	20
BBFY00100505221YHN	1.0	0.5	0.5	1005	220	25	0.55	450	20
BBNQ00100505221Y00	1.0	0.5	0.5	1005	220	25	0.6	200	20
BBPY00100505221Y00	1.0	0.5	0.5	1005	220	25	0.18	1100	20
BBSY00100505221Y00	1.0	0.5	0.5	1005	220	25	0.29	450	20
BBUP00100505221Y00	1.0	0.5	0.5	1005	220	25	0.1	1400	20
BBSY00100505241Y00	1.0	0.5	0.5	1005	240	25	0.4	400	20
BBNQ00100505301Y00	1.0	0.5	0.5	1005	300	25	0.8	200	20
BBSJ00100505301Y00	1.0	0.5	0.5	1005	300	25	0.5	300	20
BBSY00100505301Y00	1.0	0.5	0.5	1005	300	25	0.5	300	20
BBSY00100505331Y00	1.0	0.5	0.5	1005	330	25	0.5	300	20
BBUP00100505331Y00	1.0	0.5	0.5	1005	330	25	0.15	1200	20
BBSJ00100505471Y00	1.0	0.5	0.5	1005	470	25	0.5	300	20
BBSY00100505471Y00	1.0	0.5	0.5	1005	470	25	0.5	300	20
BBUP00100505471Y00	1.0	0.5	0.5	1005	470	25	0.2	1000	20
BBSJ00100505481Y00	1.0	0.5	0.5	1005	480	25	0.5	300	20
BBSY00100505481Y00	1.0	0.5	0.5	1005	480	25	0.5	300	20
BBPY00100505601Y00	1.0	0.5	0.5	1005	600	25	0.34	700	20
BBSJ00100505601Y00	1.0	0.5	0.5	1005	600	25	0.6	300	20
BBSY00100505601Y00	1.0	0.5	0.5	1005	600	25	0.52	300	20
BBPY00100505102Y00	1.0	0.5	0.5	1005	1000	25	0.49	500	20
BBSJ00100505102Y00	1.0	0.5	0.5	1005	1000	25	0.95	200	20
BBSY00100505102Y00	1.0	0.5	0.5	1005	1000	25	0.65	200	20
BBSJ00100505152Y00	1.0	0.5	0.5	1005	1500	25	1.15	100	20


EMI-Ferrite Bead



BB0061BED-KIT JIS 0603, 1005 Size

Dimensions – Millimeters (Inches)


0603



Dimensions in mm

TYPE	060303
A	0.60±0.03
B	0.30±0.03
C	0.30±0.03
D	0.15±0.05

1005

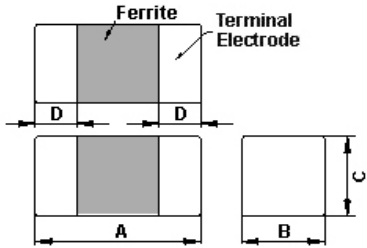

Dimensions in mm

TYPE	100505
A	1.00±0.1
B	0.50±0.1
C	0.50±0.1
D	0.25±0.1