

# G3VM-31QV2H/61QV3H/61QV4H/61QV3L

MOS FET Relays S-VSON(L), Voltage Driven Type

Voltage driven type MOS FET relay suitable for high-temperatures of 125°C

Ultra-compact S-VSON (L) package

Equipped with current limiting internal resistor on the input side



Note: The actual product is marked differently from the image shown here.

- Load voltage: 30 V/60 V  
G3VM-31QV2H: Continuous Load current of 1.5 A max.  
G3VM-61QV3H: Continuous Load current of 1.0 A max.  
G3VM-61QV4H: Continuous Load current of 0.4 A max.  
G3VM-61QV3L: Continuous Load current of 0.4 A max.
- Operating input forward voltage: H/Recommendation 5 V(Typical),  
L/Recommendation 2.5 V(Typical)
- High Ambient operating temperature: -40°C to +125°C

## Model Number Legend

**G3VM** - □ □ □ □ □ □  
(1) (2) (3) (4) (5) (6)

**(1) Load Voltage**  
3: 30 V  
6: 60 V

**(3) Package**  
Q: S-VSON(L)4-pin

**(5) Serial code**  
When specifications overlap, serial code is added in the recorded order.

**(2) Contact form**  
1: 1a (SPST-NO)

**(4) Additional functions**  
V: Voltage Driven Type


**(6) Input forward voltage**  
H: High input forward voltage type  
L: Low input forward voltage type

## Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & measurement equipment

## Package (Unit : mm, Average)

S-VSON(L)4 pin



Note: The actual product is marked differently from the image shown here.

## Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Tape cut packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
S-VSON(L)4	1a (SPST-NO)	surface-mounting Terminals	30 V	1,500 mA	G3VM-31QV2H	1 pc.	G3VM-31QV2H(TR05)	500 pcs.
			60 V	1,000 mA	G3VM-61QV3H		G3VM-61QV3H(TR05)	
				400 mA	G3VM-61QV4H		G3VM-61QV4H(TR05)	
					G3VM-61QV3L		G3VM-61QV3L(TR05)	

Note: Tape-cut S-VSON(L)s are packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

\* The AC peak and DC value are given for the load voltage and continuous load current.

# G3VM-31QV2H/61QV3H/61QV4H/61QV3L

## Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Item	Symbol	G3VM-31QV2H	G3VM-61QV3H	G3VM-61QV4H	G3VM-61QV3L	Unit	Measurement conditions
Input	Input forward voltage	$V_{IN}$	6		4	V	
	Input reverse voltage	$V_{RIN}$	6			V	
	Connection temperature	$T_J$	135			$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	$V_{OFF}$	30	60		V	
	Continuous load current (AC peak/DC)	$I_O$	1,500	1,000	400	mA	
	ON current reduction rate	$\Delta I_O / ^\circ\text{C}$	-14	-9.1	-3.6	$\text{mA}/^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	Pulse ON current	$I_{OP}$	4,500	3,000	1,200	mA	$t=100 \text{ ms}, \text{Duty}=1/10$
	Connection temperature	$T_J$	135			$^\circ\text{C}$	
Dielectric strength between I/O (*)		$V_{I-O}$	500			Vrms	AC for 1 min
Ambient operating temperature		$T_a$	-40 to +125			$^\circ\text{C}$	With no icing or condensation
Ambient storage temperature		$T_{STG}$	-40 to +135			$^\circ\text{C}$	
Soldering temperature		-	260			$^\circ\text{C}$	10 s

**Note:** In terms of its structure, this product is sensitive to static electricity. Therefore, be sure to take measures against static electricity for workbenches, people, soldering irons, solder mounting equipment, etc.

\* The dielectric strength between the input and output was checked by applying voltage between all pins on the LED side and all pins on the light-receiving side.

## Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	G3VM-31QV2H	G3VM-61QV3H	G3VM-61QV4H	G3VM-61QV3L	Unit	Measurement conditions		
Input	Reverse current	$I_R$	Maximum	10		$\mu\text{A}$	$V_R=5 \text{ V}$		
	Capacity between terminals	$C_T$	Typical	30	80	pF	$V=0 \text{ V}, f=1 \text{ MHz}$		
	Input forward current	$I_F$	Typical	3.5	0.54	3.5	6.6		
	Operate voltage	$V_{FON}$	Typical	1.4	1.2	1.5	1.2		
			Maximum	3		1.6			
	Release voltage	$V_{FOFF}$	Minimum	0.8					
			Typical	1.4	1.1	1.5	1.2		
Output	Maximum resistance with output ON	$R_{ON}$	Typical	0.1	0.2	1			
			Maximum	0.2	0.3	1.5			
	Current leakage when the relay is open	$I_{LEAK}$	Maximum	$1,000 (1)$					
	Capacity between terminals	$C_{OFF}$	Typical	120	80	12	17		
			Maximum	150		20			
Capacity between I/O terminals		$C_{I-O}$	Typical	1					
Insulation resistance between I/O terminals		$R_{I-O}$	Typical	$10^8$					
Turn-ON time		$t_{ON}$	Typical	0.7	6.5	0.22	0.11		
			Maximum	2	20	0.5	0.35		
Turn-OFF time		$t_{OFF}$	Typical	0.1	0.5	0.05	0.045		
			Maximum	0.2	1	0.2	0.15		
$V_{DD} = 20 \text{ V}, R_L = 200 \Omega$ $V_{IN} = 5 \text{ V} (\text{G3VM-31QV2H/-61QV4H})$ $V_{IN} = 3.3 \text{ V} (\text{G3VM-61QV3H})$ $V_{IN} = 1.8 \text{ V} (\text{G3VM-61QV3L})$									

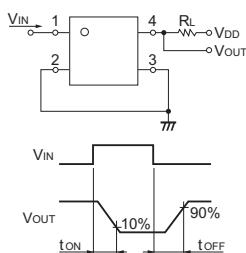

## Recommended Operating Conditions

To ensure highest reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-31QV2H	G3VM-61QV3H	G3VM-61QV4H	G3VM-61QV3L	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	24		48		V
Input forward voltage	V <sub>IN</sub>	Minimum		4		2	V
		Typical		5		2.5	
		Maximum		6		3	
Continuous load current (AC peak/DC)	I <sub>O</sub>	Maximum	1,500	1,000		400	mA
Ambient operating temperature	T <sub>a</sub>	Minimum		-40			°C
		Maximum		120			

# G3VM-31QV2H/61QV3H/61QV4H/61QV3L


## Engineering Data

### ● Input forward current vs. Input forward voltage


G3VM-31QV2H/61QV4H

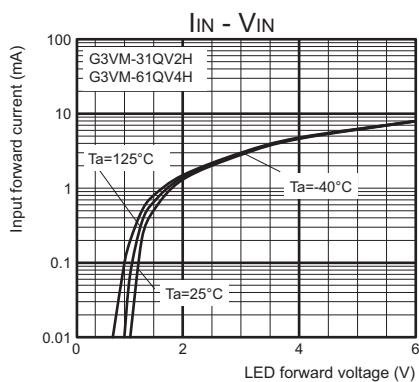


G3VM-61QV3H

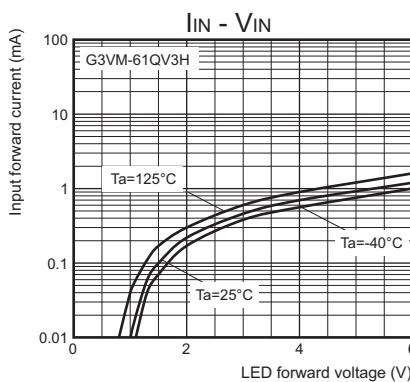


G3VM-61QV3L

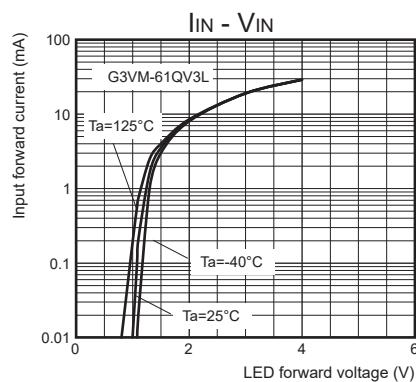

### ● Continuous load current vs. Ambient temperature

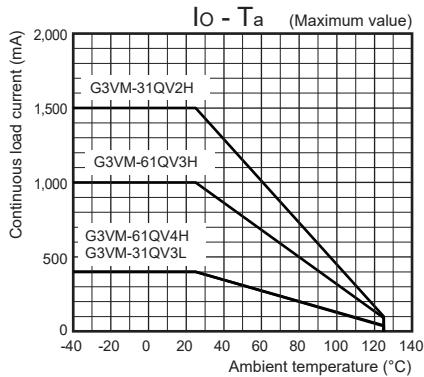


### ● Continuous load current vs. On-state voltage

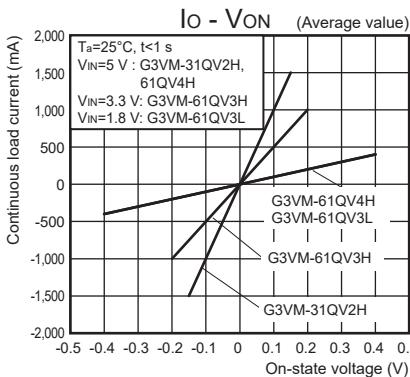


### ● On-state resistance vs. Ambient temperature

G3VM-31QV2H/61QV3H

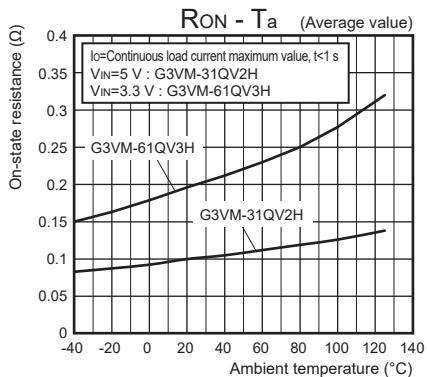


### ● On-state resistance vs. Ambient temperature

G3VM-61QV4H/61QV3L

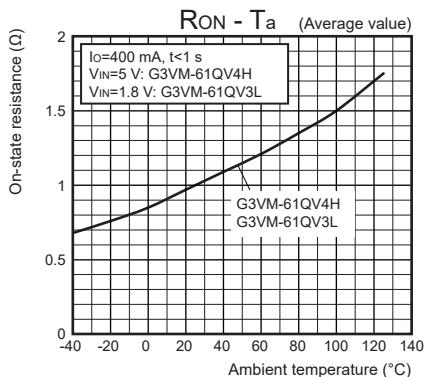


### ● Operate voltage vs. Ambient temperature

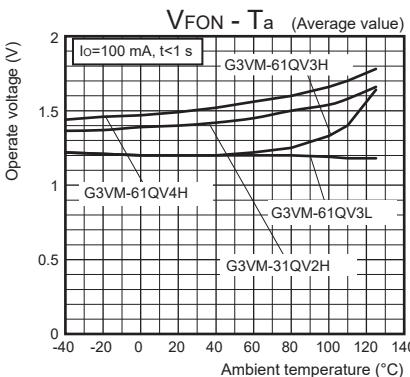


### ● Turn ON, Turn OFF time vs. Input forward voltage

G3VM-31QV2H/61QV3H/61QV4H

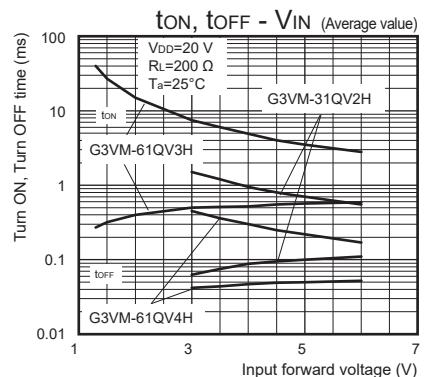


### ● Turn ON, Turn OFF time vs. Input forward voltage

G3VM-61QV3L

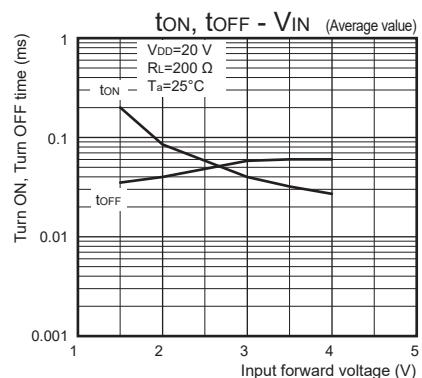


### ● Turn ON, Turn OFF time vs. Ambient temperature

G3VM-31QV2H/61QV3H/61QV4H

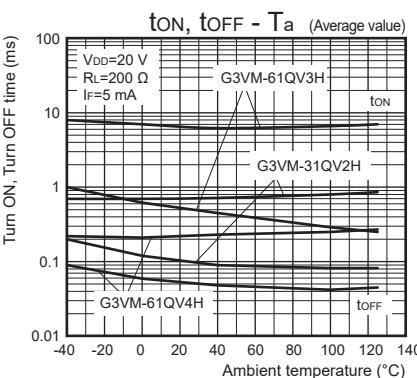

### ● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-61QV3L

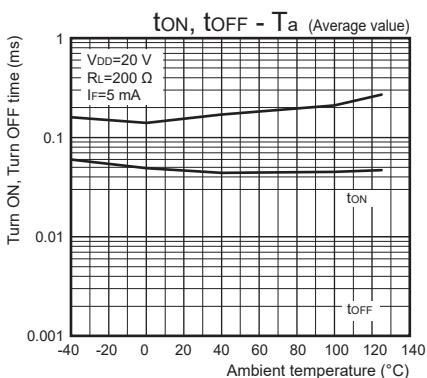


## Engineering Data

- Current leakage vs. Load voltage

G3VM-31QV2H/61QV3H

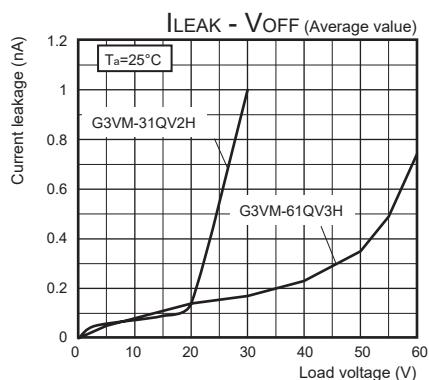


G3VM-61QV4H/61QV3L

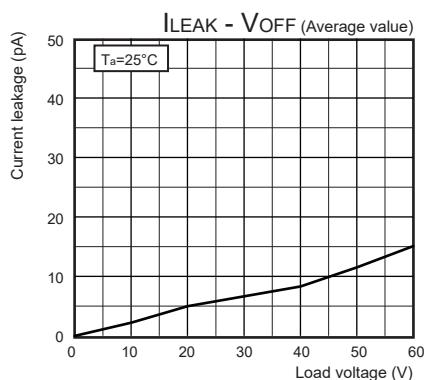


- Current leakage vs. Ambient temperature

$I_{LEAK} - T_a$  (Average value)

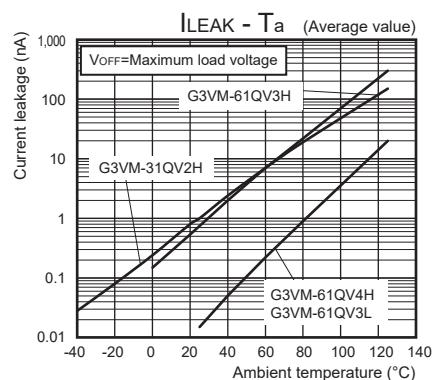

- Output terminal capacitance vs. Load voltage

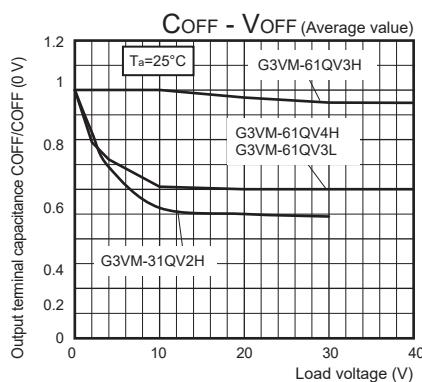


# G3VM-31QV2H/61QV3H/61QV4H/61QV3L

## Appearance / Terminal Arrangement / Internal Connections

### Appearance

#### S-VSON(L) (Super-Very Small Outline Non-leaded)


S-VSON(L) 4-pin



\* Actual model name marking  
for each model

Model	Marking
G3VM-31QV2H	3V2
G3VM-61QV3H	3V3
G3VM-61QV4H	6V4
G3VM-61QV3L	6V5

### Terminal Arrangement/Internal Connections (Top View)



Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.



## Dimensions

**CAD Data** marked products, 2D drawings and 3D CAD models are available.  
For CAD information, please visit our website, which is noted on the last page.

(Unit: mm)


### Surface-mounting Terminals

Weight: 0.01 g

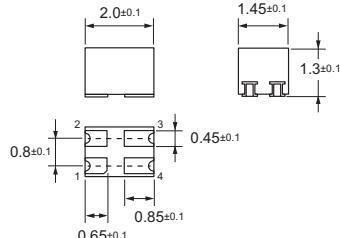

### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is  $\pm 0.1$  mm.

Note: The actual product is marked differently from the image shown here.

**CAD Data**

## Safety Precautions

Refer to the **Common Precautions for All MOS FET Relays** for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

---

**OMRON Corporation**  
Device & Module Solutions Company

**Regional Contact**

**Americas**

<https://components.omron.com/us>

**Asia-Pacific**

<https://components.omron.com/ap>

**Korea**

<https://components.omron.com/kr>

**Europe**

<https://components.omron.com/eu>

**China**

<https://components.omron.com.cn>

**Japan**

<https://components.omron.com/jp>