



Input voltage range 85 to 255 V AC
1, 2 or 3 isolated outputs up to 48 V DC
Class I equipment



- Rugged electrical and mechanical design
- Output 1 regulated, outputs 2 and 3 tracking
- Operating ambient temperature range -10 to 50°C with convection cooling

Model Selection

Output 1 $V_{\text{on}}^{\text{nom}}$ [V DC]	$I_{\text{on}}^{\text{nom}}$ [A]	Output 2 $V_{\text{on}}^{\text{nom}}$ [V DC]	$I_{\text{on}}^{\text{nom}}$ [A]	Output 3 $V_{\text{on}}^{\text{nom}}$ [V DC]	$I_{\text{on}}^{\text{nom}}$ [A]	Rated power $P_{\text{o tot}}$ [W]	Type Input voltage 85 - 255 V AC	Options
5.1	11	-	-	-	-	56	LH 1001-2R	D, V
12	6	-	-	-	-	72	LH 1301-2R	D
15	4.5	-	-	-	-	67	LH 1501-2R	D
24	3	-	-	-	-	72	LH 1601-2R	D
48	1.5	-	-	-	-	72	LH 1901-2R	D
12	2	12	2	-	-	48	LH 2320-2	D
15	1.7	15	1.7	-	-	51	LH 2540-2	D
5.1	5	12	0.7	12	0.7	42	LH 3020-2	D, V
5.1	5	15	0.6	15	0.6	43	LH 3040-2	D, V

Input

Input voltage	continuous range	85 - 255 V AC
Input frequency		47 - 63 Hz
Inrush current limitation	by thermistor	

Output

Efficiency	$V_{\text{i nom}}, I_{\text{o nom}}$	up to 83%
Output voltage 1 setting acc.	$V_{\text{i nom}}, I_{\text{o nom}}$	$\pm 2\% V_{\text{o1 nom}}$
Output voltage 2, 3 setting acc.	$V_{\text{i nom}}, I_{\text{o nom}}$	$\pm 5\% V_{\text{o2,3 nom}}$
Output voltage switching noise	IEC/EN 61204, total	typ. 200 mV _{pp}
Line regulation	$V_{\text{i min}} - V_{\text{i max}}, I_{\text{o nom}}$	typ. $\pm 1\% V_{\text{o nom}}$
Load regulation output 1	$V_{\text{i nom}}, 0 - I_{\text{o1 nom}}$	typ. 0.2% $V_{\text{o1 nom}}$
Load regulation output 2, 3	10 - 100% $I_{\text{o2,3 nom}}$	typ. 0.7 V
Output voltage 2, 3	$V_{\text{i nom}}, I_{\text{o1 nom}}, I_{\text{o2,3}} = 0$	max. 115% $V_{\text{o2,3 nom}}$
Cross load regulation outp. 2, 3	0 - 100% $I_{\text{o1 nom}}$	typ. 0.7 V
Minimum output current	not required	0 A
Current limitation main output	rectangular U/I characteristic	typ. 110% $I_{\text{o nom}}$
Current limitation aux. output(s)	rectangular U/I characteristic	typ. 120% $I_{\text{o nom}}$
Operation in parallel	by current limitation	
Hold-up time	$V_{\text{i}} = 230 \text{ V AC}, I_{\text{o nom}}$	typ. 70 ms

Protection

Input undervoltage lockout	typ. 60 V AC
Input overvoltage lockout	typ. 280 V AC
Input transient protection	varistor
Output	no-load, overload and short circuit proof
Output overvoltage	suppressor diode in each output
Overtemperature	switch-off with auto restart

Control

Output voltage adjustment	single output types	0 - 110% $V_{o1\ nom}$
Inhibit	TTL input, output(s) disabled if left open-circuit	
Status indication	LEDs: OK, inhibit	

Safety

Approvals	EN 60950, UL 1950, CSA C22.2 No. 950	
Class of equipment		class I
Protection degree	units without options	IP 40
Electric strength test voltage	I/case	2 kV AC
	I/O	4 kV AC
	O/case	1 kV AC
	O/O	0.2 kV AC

EMC

Electrostatic discharge	IEC/EN 61000-4-2, contact discharge, level 2 (4 kV)	criterion A
Electromagnetic field	IEC/EN 61000-4-3, level x (20 V/m)	criterion A
Electr. fast transients/bursts	IEC/EN 61000-4-4, input, level 1 (0.5 kV)	criterion A
Surge	IEC/EN 61000-4-5, input, level 1 (0.5 kV)	criterion A
Electromagnetic emissions	CISPR 22/EN 55022, conducted	class A
	CISPR 22/EN 55022, radiated	class B

Environmental


Operating ambient temperature	$V_{i\ nom}, I_{o\ nom}$, convection cooled	-10 to 50°C
Operating case temperature T_C	$V_{i\ nom}, I_{o\ nom}$	-10 to 80°C
Storage temperature	non operational	-25 to 100°C
Damp heat	IEC/EN 60068-2-3, 93 %, 40 °C	21 days
Vibration, sinusoidal	IEC/EN 60068-2-6, 10 - 60/60 - 150 Hz	0.15 mm/2 g _n
Shock	IEC/EN 60068-2-27, 6 ms	15 g _n
Bump	IEC/EN 60068-2-29, 16 ms	10 g _n
MTBF	MIL-HDBK-217E, G _B , 40 °C, single output types	384'000 h

Options

Input and/or output undervoltage monitoring, excludes option V	D1- D8
Input and/or output undervoltage monitoring (VME), excludes option D	V2, V3

Mechanical data

Tolerances ± 0.3 mm (0.012") unless otherwise indicated.

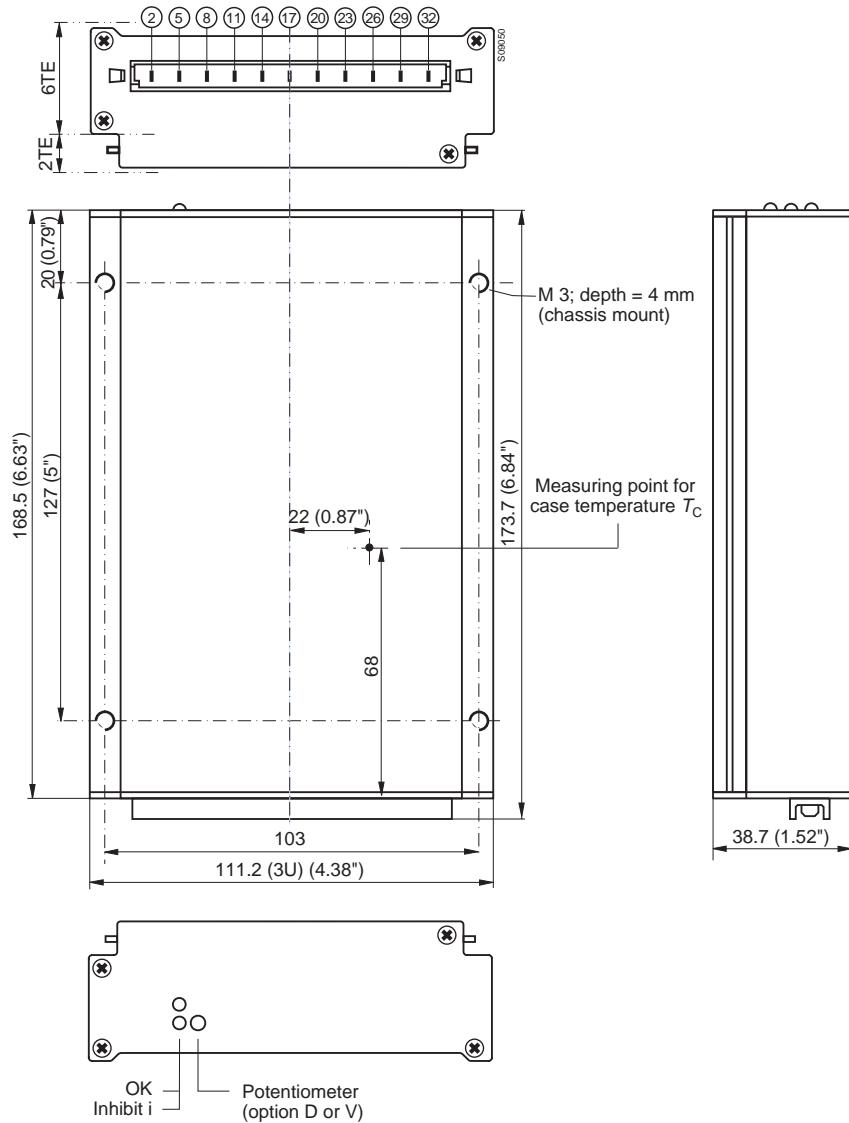

Pin allocation

Pin	Electrical Determination	LH1000	LH2000	LH3000
2 5	Inhibit control input Safe Data or ACFAIL	i D or V	i D or V	i D or V
8 11	Output voltage (positive) Output voltage (negative)	Vo1+ Vo1-		Vo3+ Vo3-
14 17	Control input + Control input -	R G		
14 17	Output voltage (positive) Output voltage (negative)		Vo2+ Vo2-	Vo2+ Vo2-
20 23	Output voltage (positive) Output voltage (negative)	Vo1+ Vo1-	Vo1+ Vo1-	Vo1+ Vo1-
26	Protective earth	⏚	⏚	⏚
29 32	AC input voltage AC input voltage	N ≈ P ≈	N ≈ P ≈	N ≈ P ≈

Accessories

Front panels 19" (Schroff/Intermas)

Mating H11 connectors with screw, solder, fast-on or press-fit terminals

Connector retention facilities and code key system for connector coding

Flexible PCB for connecting the converter via an H11 connector, if mounted on a PCB

Chassis or wall mounting plates for frontal access

Universal mounting brackets for chassis or DIN-rail mounting

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.