


## **Dimensions: [mm]**












Scale - 5:1

## **Product Marking:**


| Marking             | 356D (Series 356, Binning D) |
|---------------------|------------------------------|
| Marking - Date Code | YWW                          |

## **Recommended Land Pattern: [mm]**



Scale - 5:1

#### **Schematic:**



## **General Properties:**

| Туре                  | Optocoupler Phototransistor |
|-----------------------|-----------------------------|
| Input                 | DC                          |
| Package               | SOP 4                       |
| Plastic Housing Color | White                       |

#### **Certification:**

| RoHS Approval  | Compliant [2011/65/EU&2015/863]  |  |  |  |  |
|----------------|--|--|--|--|--|
| REACh Approval | Conform or declared [(EC)1907/2006]                                    |  |  |  |  |
| Halogen Free   | Conform [JEDEC JS709B]   |  |  |  |  |
| Halogen Free   | Conform [IEC 61249-2-21]   |  |  |  |  |
| VDE Approval   | 40051484 [DIN EN 60747-5-5 (VDE0884-5); EN<br>60747-5-5:2011; A1:2015] |  |  |  |  |
| UL Approval    | E513104 [UL 1577]  |  |  |  |  |

#### **General Information:**

CHECKED

REVISION

DATE (YYYY-MM-DD)

| Operating Temperature                      | -55 up to +110 °C  |
|--|--------------------|
| Storage Conditions (for single parts)      | -55 up to +125 °C  |
| Storage Conditions (in original packaging) | < 40 °C; < 75 % RH |
| Moisture Sensitivity Level (MSL)           | 1                  |

| ROHS COMPLIANT COMPLIANT HALOGEN HALOGEN |   |
|--|---|
| WÜRTH ELEKTRONIK                         | Würth Elektronik eißos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tell. +49 (0) 79 42 945 - 0 www.we-online.com |

eiSos@we-online.com

GENERAL TOLERANCE

PROJECTION METHOD

## Absolute Maximum Ratings Input Properties (Ambient Temperature 25 °C unless otherwise specified):

| Properties              |                     | Test conditions    | Value | Unit |
|-------------------------|---------------------|--------------------|-------|------|
| Forward Current         | I <sub>F max.</sub> |                    | 60    | mA   |
| Peak Forward Current    |                     | duty/ 100 @ 100 Hz | 1     | Α    |
| Reverse Voltage         | V <sub>REV</sub>    |                    | 6     | V    |
| Input Power Dissipation | P <sub>I</sub>      |                    | 100   | mW   |

#### **Absolute Maximum Ratings Output Properties:**

| Properties                |                   | Value | Unit |
|---------------------------|-------------------|-------|------|
| Collector Emitter Voltage | $V_{CE}$          | 80    | V    |
| Emitter Collector Voltage | V <sub>EC</sub>   | 7     | V    |
| Collector Current         | I <sub>CE.P</sub> | 50    | mA   |
| Output Power Dissipation  | P <sub>0</sub>    | 150   | mW   |

#### **Absolute Maximum Ratings Common Properties:**

| Properties           |                   | Test conditions             | Value | Unit    |
|----------------------|-------------------|-----------------------------|-------|---------|
| Power Dissipation 1) | P <sub>Diss</sub> |                             | 200   | mW      |
| Isolation Voltage    |                   | AC for 1 Minute, RH 40~60 % | 3750  | V (RMS) |

<sup>1)</sup> Total power dissipation of the whole component

#### **Electrical & Optical Input Properties:**


| Properties        |                  | Test conditions        | Value |      |      |  |  |
|-------------------|------------------|------------------------|-------|------|------|--|--|
|                   |                  | Test continuous        | typ.  | max. | Unit |  |  |
| Forward Voltage   | V <sub>F</sub>   | I <sub>F</sub> = 10 mA | 1.24  | 1.4  | V    |  |  |
| Reverse Current   | I <sub>REV</sub> | $V_{REV} = 6 V$        |       | 10   | μΑ   |  |  |
| Input Capactiance | C <sub>in</sub>  | V = 0 V<br>f = 1 kHz   | 10    |      | pF   |  |  |

## **Electrical & Optical Output Properties:**


| Properties                             | Test conditions       |   | Value |      |      |  |  |
|--|-----------------------|---|-------|------|------|--|--|
| rroperties                             |                       | rest continuons                               | min.  | max. | Unit |  |  |
| Collector-Emitter Dark Current         | I <sub>CEO.Dark</sub> | $V_{CE} = 20 \text{ V}$ $I_F = 0$             |       | 100  | nA   |  |  |
| Collector-Emitter Breakdown<br>Voltage | V <sub>(BR)CE</sub>   | I <sub>C</sub> = 100 μA<br>I <sub>F</sub> = 0 | 80    |      | V    |  |  |
| Emitter-Collector Breakdown<br>Voltage | V <sub>(BR)EC</sub>   | I <sub>E</sub> = 100 μA<br>I <sub>F</sub> = 0 | 7     |      | V    |  |  |

## **Electrical & Optical Transfer Properties:**


| Properties                           |                  | Test conditions  | Value |      |      |      |  |  |
|--------------------------------------|------------------|--|-------|------|------|------|--|--|
| rioperties                           |                  | Test conditions  | min.  | typ. | max. | Unit |  |  |
| Current Transfer Ratio               | CTR              | $I_{\text{F}} = 5 \text{ mA}$ $V_{\text{CE}} = 5 \text{ V}$                | 300   |      | 600  | %    |  |  |
| Collector-Emitter Saturation Voltage | l                | I <sub>F</sub> = 20 mA<br>I <sub>C</sub> = 1 mA                            |       | 0.06 | 0.2  | V    |  |  |
| Rise Time                            |                  | $V_{CE} = 2 V$ $I_C = 2 \text{ mA}$ $R_L = 100 \Omega$                     |       | 3    | 18   | μs   |  |  |
| Fall Time                            | t <sub>f</sub>   | $V_{CE} = 2 V$ $I_C = 2 \text{ mA}$ $R_L = 100 \Omega$                     |       | 4    | 18   | μs   |  |  |
| Cut-Off Frequency f                  |                  | $V_{CE} = 2 V$ $I_{C} = 2 \text{ mA}$ $R_{I} = 100 \Omega$ $-3 \text{ dB}$ |       | 80   |      | kHz  |  |  |
| Floating Capacitance                 | C <sub>IO</sub>  | V = 0 V<br>f = 1 MHz   |       | 0.4  |      | pF   |  |  |
| Isolation Resistance                 | R <sub>ISO</sub> | DC = 500 V<br>40~60 % R.H.   | 1     | 100  |      | ΤΩ   |  |  |

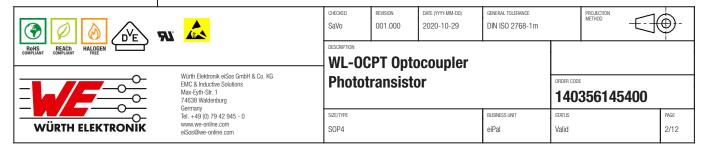


## **Total Power Dissipation vs. Ambient Temperature:**

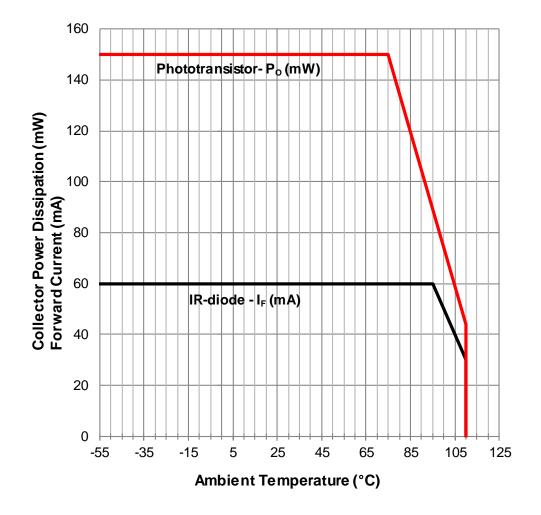


#### **Collector Dark Current vs. Ambient Temperature:**

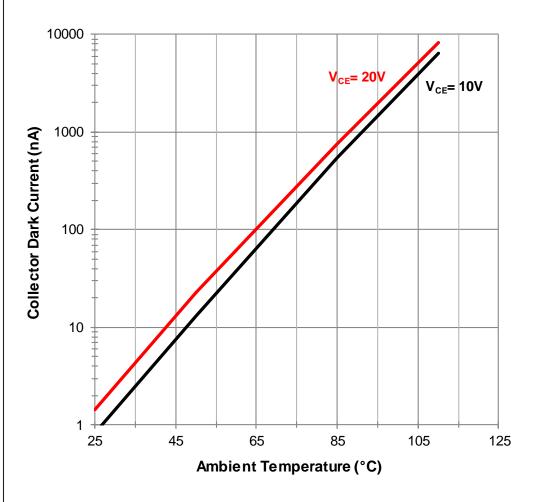

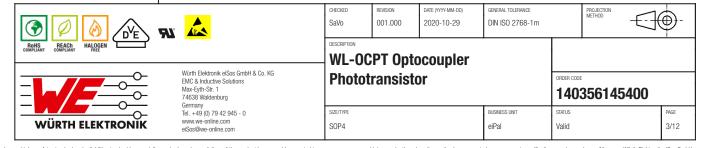



## **Relative CTR vs. Ambient Temperature:**

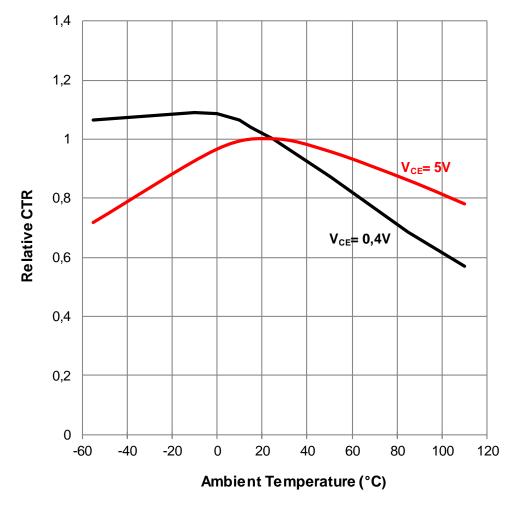


#### Testcondition: IF= 5mA; Normalized to TA= 25°C

## **Collector-Emitter Saturation Voltage vs. Ambient Temperature:**

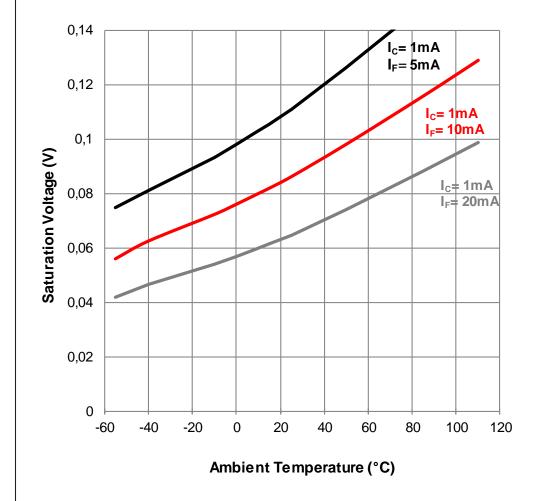


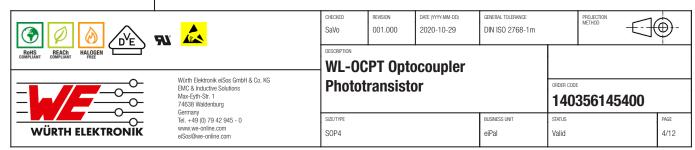

## **Forward Current vs. Forward Voltage:**

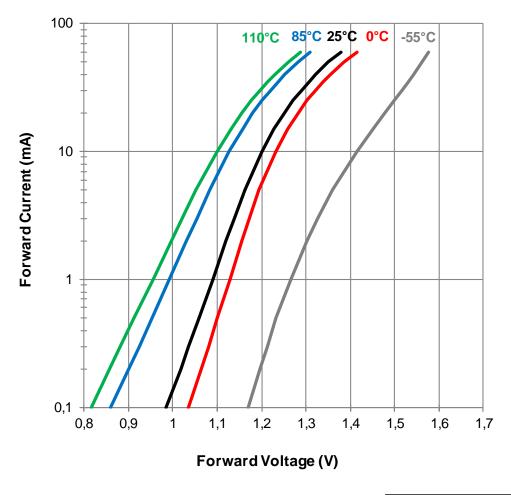


## **Collector Current vs. Collector-Emitter Voltage:**

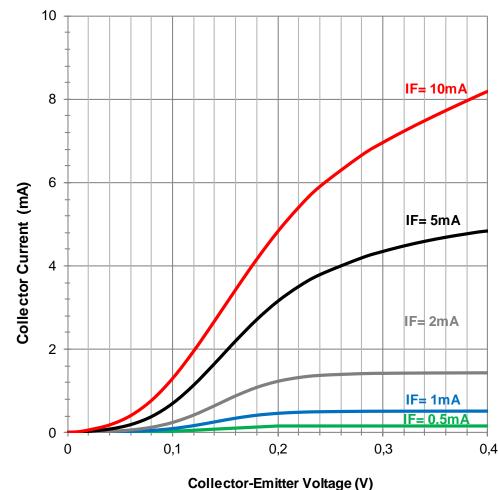


Testcondition: TA= 25°C


CHECKER DEVISION DISTE AVAILABLED CONTROL TO EDUCATE THE EDUCATE

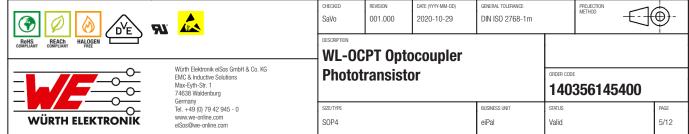

## **Collector Current vs. Collector-Emitter Voltage:**

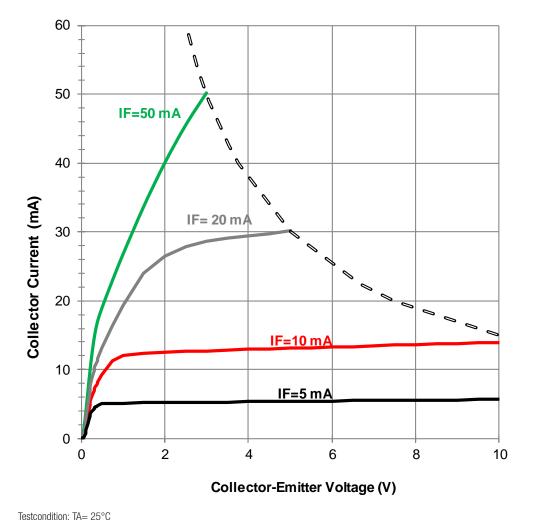

#### **Relative CTR vs. Forward Current:**

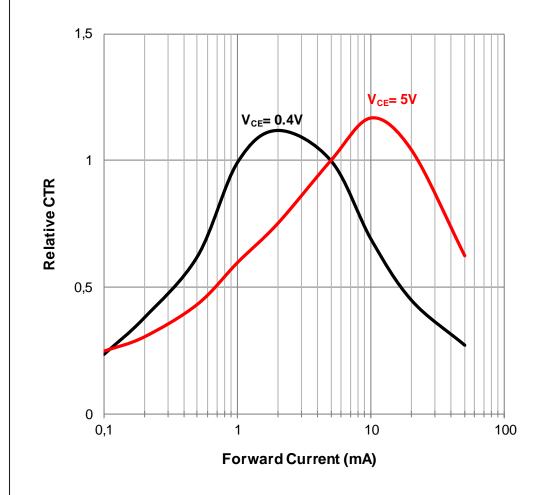


Testcondition: I<sub>E</sub>= 5mA; TA= 25°C

CHECKED REVISION DATE (YYYY-MM-DD) GENERAL TOLERANCE SaVo 001.000 2020-10-29 DIN ISO 2768-1m **WL-OCPT Optocoupler** Würth Elektronik eiSos GmbH & Co. KG **Phototransistor** EMC & Inductive Solutions Max-Eyth-Str. 1 140356145400 74638 Waldenburg SIZE/TYPE STATUS Tel. +49 (0) 79 42 945 - 0 BUSINESS UNIT PAGE www.we-online.com SOP4 eiPal Valid 6/12 eiSos@we-online.com

## **Switching time vs. Load Resistance:**


# 30 Response Time (µs) 20 tf 10 tr 0 0,1 10 Load Resistance ( $k\Omega$ )

## Gain vs. Frequency:

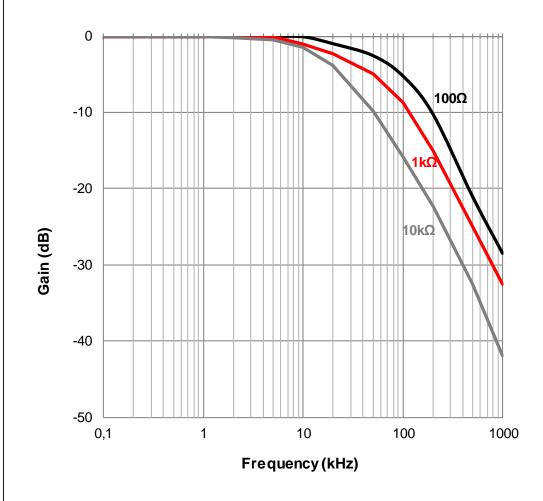



Testcondition:  $I_C = 2mA$ ;  $V_{CF} = 2V$ ; TA = 25°C


Testcondition:  $I_C = 2mA$ ;  $V_{CF} = 2V$ ; TA = 25°C

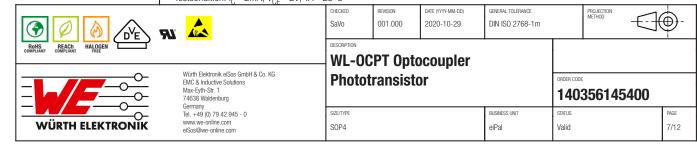

## Packaging Specification - Tape: [mm]

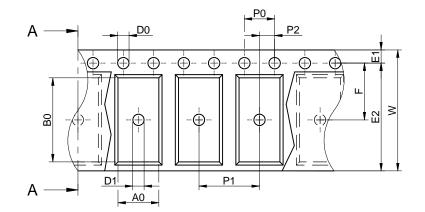




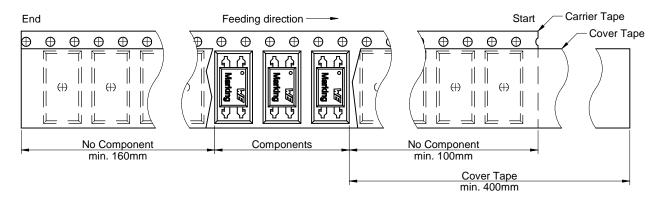


#### Packaging is referred to the international standard IEC 60286-3:2019


|           | A0   | ВО    | lw         | т    | T1   | T2   | ко   | P0   | P1   | P2   | DO        | D1   | F1   | E2    | F    |             | Qty.   |
|-----------|------|-------|------------|------|------|------|------|------|------|------|-----------|------|------|-------|------|-------------|--------|
| Tape Type | (mm) | (mm)  | (mm)       | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm)      | (mm) | (mm) | (mm)  | (mm) | Material    | (pcs.) |
|           | typ. | typ.  | +0,3/ -0,1 | ref. | ref. | typ. | typ. | ±0,1 | ±0,1 | ±0,1 | +0,1/-0,0 | min. | ±0,1 | min.  | ±0,1 |             |        |
| 2a        | 4,70 | 10,50 | 16,00      | 0,40 | 0,10 | 4,60 | 4,20 | 4,00 | 8,00 | 2,00 | 1,50      | 1,50 | 1,75 | 14,25 | 7,50 | Polystyrene | 3000   |

## Packaging Specification - Reel: [mm]

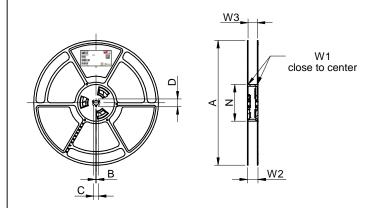

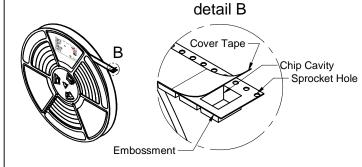

|   |           | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | N<br>(mm) | W1<br>(mm) | W2<br>(mm) | W3<br>(mm) | W3<br>(mm) | Material    |
|---|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|-------------|
| Г | Tolerance | ± 2,0     | typ.      | typ.      | typ.      | typ.      | typ.       | typ.       | min.       | max.       |             |
|   | Value     | 330,00    | 2,20      | 13,00     | 20,90     | 97,20     | 16,70      | 20,70      | 15,90      | 19,40      | Polystyrene |



 Tape width
 16 mm
 0,1 N - 1,3 N



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany

Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com WL-OCPT Optocoupler Phototransistor

DATE (YYYY-MM-DD)

2020-10-29

CHECKED

SaVo

REVISION

001.000

140356145400

PROJECTION METHOD

SZE/TYPE BUSINESS UNIT STATUS PAGE
SOP4 eiPal Valid 8/12

GENERAL TOLERANCE

DIN ISO 2768-1m

## **Classification Reflow Profile for SMT components:**



## **Classification Reflow Soldering Profile:**

| Profile Feature                                      |                    | Value                           |
|--|--------------------|---------------------------------|
| Preheat Temperature Min                              |                    | 150 °C                          |
| Preheat Temperature Max                              | T <sub>s max</sub> | 200 °C                          |
| Preheat Time $t_s$ from $T_{s  min}$ to $T_{s  max}$ | t <sub>s</sub>     | max. 60 - 120 seconds           |
| Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )     |                    | 3 °C/ second max.               |
| Liquidous Temperature                                | T <sub>L</sub>     | 217 °C                          |
| Time $t_L$ maintained above $T_L$                    | t <sub>L</sub>     | max. 60 seconds                 |
| Peak package body temperature                        | T <sub>p</sub>     | $T_p \le T_c$ , see Table below |
| Time within 5°C of actual peak temperature           | t <sub>p</sub>     | max. 10 seconds                 |
| Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )   |                    | 6 °C/ second max.               |
| Time 25°C to peak temperature                        |                    | max. 220 seconds                |

refer to IPC/ JEDEC J-STD-020E

## Package Classification Reflow Temperature (T<sub>c</sub>):

| Properties  | Volume mm³<br><350 | Volume mm <sup>3</sup><br>350-2000 | Volume mm³<br>>2000 |  |  |
|---|--------------------|------------------------------------|---------------------|--|--|
| PB-Free Assembly   Package Thickness < 1.6 mm           | 260 °C             | 260 °C                             | 260 °C              |  |  |
| PB-Free Assembly   Package Thickness<br>1.6 mm - 2.5 mm | 260 °C             | 250 °C                             | 245 °C              |  |  |
| PB-Free Assembly   Package Thickness<br>≥ 2.5 mm        | 250 °C             | 245 °C                             | 245 °C              |  |  |
| Applied cycles  | 2 cycles max.      |                                    |                     |  |  |

refer to IPC/ JEDEC J-STD-020E

|   | , <b>9</b> 1 |   | CHECKED<br>SaVo   | REVISION<br>001.000 | DATE (YYYY-MM-DD) 2020-10-29 | GENERAL TOLERANCE DIN ISO 2768-1m |                 | PROJECTION METHOD | <del>]</del> |  |
|---|--------------|---|-------------------|---------------------|------------------------------|-----------------------------------|-----------------|-------------------|--------------|--|
| ROHS REACH HALOGEN COMPLIANT COMPLIANT FREE |              |   | WL-OC             | PT Opto             | coupler                      |                                   |                 |                   |              |  |
|   |              | Wirth Elektronik elSos GmbH & Co. KG<br>EMC & Inductive Solutions<br>Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0<br>www.we-online.com<br>elSos@we-online.com | Phototransistor   |                     |                              |                                   |                 | 140356145400      |              |  |
| WÜRTH ELEKTRONIK                            |              |   | SIZE/TYPE<br>SOP4 |                     |                              | BUSINESS UNIT<br>eiPal            | status<br>Valid |                   | PAGE 9/12    |  |

## **Cautions and Warnings:**

## The following conditions apply to all goods within the product series of Optoelectronic Components of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

- This optoelectronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- Optoelectronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The optoelectronic component is designed and manufactured to be used within the datasheet specified values. If the usage and
  operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the
  authority of the customer. All technical specifications for standard products also apply to customer specific products.
- Unless Würth Elektroik has given its express consent, the customer is under no circumstances entitled to reverse engineer, disassemble
  or otherwise attempt to extract knowledge or design information from the optoelectronic component.

#### **Product specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.
- The soldering pad pattern shown above is a general recommendation for the easy assembly of optoelectronic components. If a high
  degree of precision is required for the selected application (i.e. high density assembly), the customer must ensure that the soldering pad
  pattern is optimized accordingly.

#### **Cleaning and Washing:**

Washing agents used during the production to clean the customer application might damage or change the characteristics of the
optoelectronic component body, marking or plating. Washing agents may have a negative effect on the long-term functionality of the
product.

Using a brush during the cleaning process may break the optoelectronic component body. Therefore, we do not recommend using a
brush during the PCB cleaning process.

#### Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the optoelectronic component body, pins or termination. Expansion could
damage the components. We recommend a manual inspection after potting to avoid these effects.

#### Storage Conditions:


- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer
  degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of
  shipment.
- Do not expose the optoelectronic component to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- For a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is
  also recommended to return the optoelectronic component to the original moisture proof bag and reseal the moisture proof bag again.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### **Handling:**

- Violation of the technical product specifications such as exceeding the nominal rated current, will void the warranty.
- The product design may influence the automatic optical inspection.
- Certain optoelectronic component surfaces consist of soft material. Pressure on the top surface has to be handled carefully to prevent negative influence to the function and reliability of the optoelectronic components.
- ESD prevention methods need to be applied for manual handling and processing by machinery.
- Resistors for protection are obligatory.
- In addition to optoelectronic components testing, products incorporating these devices have to comply with the safety precautions given
  in IEC 60825-1, IEC 62471 and IEC 62778.


#### **Technical specification:**

- The typical and/or calculated values and graphics of technical parameters can only reflect statistical figures. The actual parameters of each single product, may differ from the typical and/or calculated values or the typical characteristic line.
- In the characteristics curves, all values given in dotted lines may show a higher deviation than the paramters mentioned above.
- On each reel, only one bin is sorted and taped. The bin is defined on the current transfer ratio.
- In order to ensure highest availability, the reel binning of standard deliveries can vary. A single bin cannot be ordered. Please contact us
  in advance, if you need a particular bin sorting before placing your order.

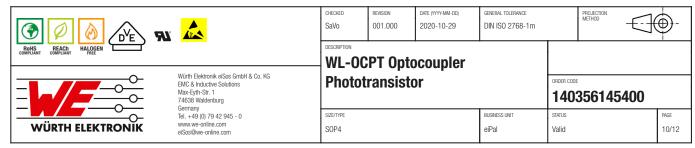

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

The customer has the sole responsibility to ensure that he uses the latest version of this datasheet, which is available on Würth Elektronik's homepage. Unless otherwise agreed in writing (i.e. customer specific specification), changes to the content of this datasheet may occur without notice, provided that the changes do not have a significant effect on the usability of the optoelectronic components.

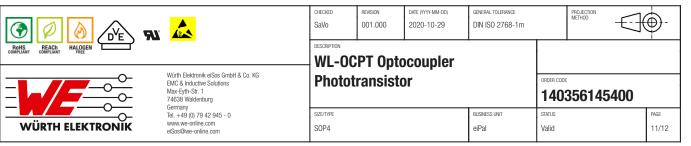

## **Important Notes**

## The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

