N Channel MOSFET

multicomp PRO

RoHS Compliant



Features

- Rds(on) < 100mΩ (Vgs = 10V)
- $R_{DS(ON)} < 120m\Omega (V_{GS} = 4.5V)$

Absolute Maximum Ratings (TA = 25°C unless otherwise noted)

Parameter	Symbol	Rating	Unit	
Drain-Source Voltage	Vds	60	V	
Gate-Source Voltage	Vgs	+20		
Drain Current Continuous	lo	4	A	
Pulsed Drain Current	Ідм	25		
Power Dissipation @T _A =25°C	PD	3	W	
Thermal Resistance. Junction- to-Ambient	Reja	42	°C/W	
Operating Junction and Storage Temperature Range	Tj.Tstg	-65 to 150	°C	

Electrical Characteristics (TA = 25°C

Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit
Drain-Source Breakdown Voltage	Vdss	Vgs=0V, Id=250uA	60			V
Zero Gate Voltage Drain Current	Idss	Vds=-60V, Vgs=0V			1	μA
Gate-Body leakage	lgss	Vgs=20V, Vds=±0V			±100	nA
Gate Threshold Voltage (NOTE 2)	VGS(th)	Vgs=Vds Id=-250µA	1	1.6	2	V
Drain-Source On-State Resistance (NOTE 2)	RDS(On)	Vgs=10V, Id=-4A			100	mΩ
		Vgs=4.5V, Id=-3.7A			120	
On State Drain Current (NOTE 2)	ID(ON)	VDS=10V, VGS=5V	10			А
Forward Transconductance (NOTE 2)	g FS	Vds=5V, Id=4A		7		S

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



N Channel MOSFET

Parameter	Symbol	Test Conditions		Тур	Мах	Unit
Input Capacitance	Ciss	Vos=25V, Vos=0V, f=1MHz		345		
Output Capacitance	Coss			110		pF
Reverse Transfer Capacitance	Crss			30		
Turn-On DelayTime	td(on)				20	
Rise Time	tr				20	
Turn-Off DelayTime	td(off)	Vdd=25V, Id=1A, Vgs=10V, Rgen =6Ω			50	nS
Fall Time	tr				20	
Total Gate Charge	Qg	Vos=40V, Io=4V, Vos=10V		13	20	
Gate Source Charge	Qgs			1.7		nC
Gate Drain Charge	Qgd			3.2		
Drain-Source Diode Forward Current (NOTE 2)	ls				2.5	А
Diode Forward Current	Vsd	Vgs=0V, Is=2.5A		0.8	1.2	V

Note: 1. Surface Mounted on FR4 Board t ≤10Sec.

2. Pulse Test: Pulse Width ≤300µ, Duty Cycle ≤2%

Typical Characterisitics





Figure 1. On-Region Characteristics.






Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.




Figure 5. Transfer Characteristics.






Figure 3. On-Resistance Variation with Temperature.





Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

multicomp PRO

multicomp PRO

Typical Characterisitics




Figure 7. Gate Charge Characteristics.


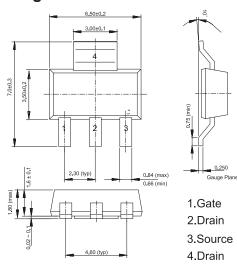



Figure 10. Single Pulse Maximum Power Dissipation.

Diagram








Figure 9. Maximum Safe Operating Area.


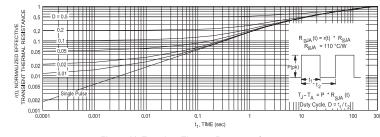


Figure 11. Transient Thermal Response Curve. Thermal characterization performed using the conditions described in note 1c. Transient thermal response will change depending on the circuit board design.



Part Number Table

Description	Part Number		
N Channel MOSFET, 3.7A, 60V, SOT23-3	2KK5030		

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

