P Channel MOSFET



RoHS Compliant



Features

- V_{DS} (V) = 20V
- I_D =-2.4A (V_{GS} =4.5V)
- RDS(ON) $< 52m\Omega$ (VGS =4.5V)
- $R_{DS}(ON) < 70m\Omega \text{ (Vgs = 2.5V)}$
- R_{DS}(ON) <100mΩ (V_{GS} =1.8V)

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit	
Drain-Source Voltage		VDS	-20	V	
Gate-Source Voltage		Vgs	+8		
Continuous Drain Current	(Note.1)	ID	-2.4		
Pulsed Drain Current		Ірм	-10	А	
Power Dissipation	(Note.1)	D-	0.5	١٨/	
	(Note.2)	─ P _D	0.46	W	
Thermal Resistance.Junction- to-Ambient	(Note.1)	RthJA	250	90/14/	
Thermal Resistance.Junction- to-Case		RthJC	75	°C/W	
Junction Temperature		TJ	150		
Storage Temperature Range		Tstg	-55 to 150	°C	

Note.1: 250°C/W when mounted on a 0.02 in pad of 2 oz. copper.

Note.2: 270°C/W when mounted on a minimum pad.

Electrical Characteristics Ta = 25°C

Characteristic	Symbol	Conditions	Min	Тур	Max	Unit
Drain-Source Breakdown Voltage	VDSS	In=-250μA, Vgs=0V	-20			V
Zero Gate Voltage Drain Current	IDSS	V _{DS} =-16V, V _{GS} =0V			-1	uA
Gate-Body leakage current	Igss	V _{DS} =0V, V _{GS} =±8V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =-250µA (Note.1)	-0.4		-1.5	V
	RDS(On)	Vgs=2.5V, Ip=2.4A (Note.1)			52	mΩ
Static Drain-Source On-Resistance		V _G s=-1.8V, I _D =-1.8A (Note.1)			70	
		Vgs=2.5V, Ip=2.4A (Note.1)			100	
On state drain current	Id(on)	Vgs=-4.5V, Vds=-5V	-10			Α
Forward Transconductance	grs	VDS=5V, ID=-1.25A		12		S

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



P Channel MOSFET



Characteristic	Symbol	Conditions	Min	Тур	Max	Unit
Input Capacitance	Ciss			1312		
Output Capacitance	Coss	V _G s=0V, V _D s=-10V, f=1MHz		240		pF
Reverse Transfer Capacitance	Crss			106		
Total Gate Charge	Qg	Vgs=-4.5V, Vps=-30V, Ip=-2.4A		12	20	
Gate Source Charge	Qgs			2		nC
Gate Drain Charge	Qgd			2		
Turn-On DelayTime	td(on)	Vgs=-4.5V, Vps=-10V, lp=-1A Rg=6Ω		15	27	
Turn-On Rise Time	tr			15	27	nS
Turn-Off DelayTime	td(off)			40	64	110
Turn-Off Fall Time	tf			25	40	
Maximum Body-Diode Continuous Current	ls				-0.42	Α
Diode Forward Voltage	Vsp	Is=-0.42A,V _G s=0V			-1.2	V

Note:Pulse Test : Pulse Width ≤300µs, Duty Cycle≤2%

Typical Characterisitics




Figure 1. On-Region Characteristics.




Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.




Figure 3. On-Resistance Variation with Temperature.




Figure 4. On-Resistance Variation with Gate-to-Source Voltage.




Figure 5. Transfer Characteristics.




Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



P Channel MOSFET

multicomp PRO

Typical Characterisitics




Figure 7. Gate Charge Characteristics.




Figure 8. Capacitance Characteristics.




Figure 9. Maximum Safe Operating Area.




Figure 10. Single Pulse Maximum Power Dissipation.


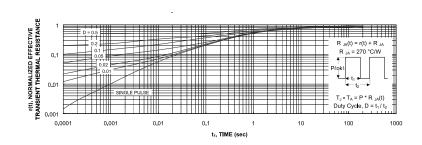



Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1b. Transient thermal response will change depending on the circuit board design.

Diagram



Dimensions : Millimetres



Part Number Table

Description	Part Number		
P Channel MOSFET, 2.4A, 30V	FDN304P		

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

