





# Raspberry Pi Compute Module 5

Published November 2024

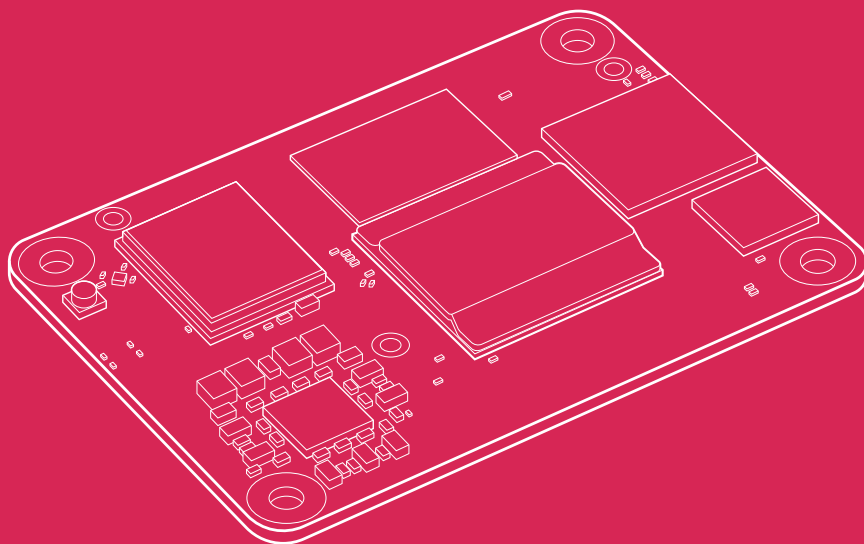

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

## Overview

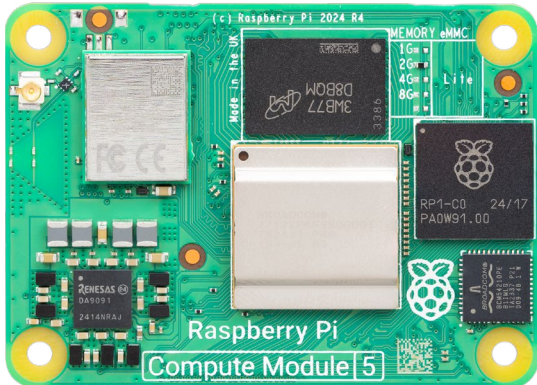

Raspberry Pi Compute Module 5 is a system on module that delivers the power of Raspberry Pi 5 in a form factor ideal for embedded applications.

featuring a quad-core Arm Cortex-A76 processor, dual 4Kp60 HDMI output, Gigabit Ethernet, optional fully-certified wireless module providing Wi-Fi® and Bluetooth connectivity, and a variety of RAM and eMMC flash options, Compute Module 5 enables you to leverage Raspberry Pi 5's powerful hardware and optimised software stack in your own custom systems and form factors.

In comparison with its predecessor, Compute Module 5 features additional I/O interfaces, allowing even more flexibility and providing a greater breadth of options for product and application design. For cost-sensitive applications, Compute Module 5 is also available without eMMC flash.

Also available to assist product designers is the Raspberry Pi Development Kit for Compute Module 5, offering an ideal environment for prototyping embedded solutions. This comprehensive kit includes a Compute Module 5 and Compute Module 5 IO Board, together with all the essential accessories to kick-start your product design.

## Specification

<b>Form factor:</b>	55 mm × 40 mm × 4.7 mm module 4 × M2.5 mounting holes
<b>Processor:</b>	Broadcom BCM2712 quad-core 64-bit Arm Cortex-A76 (Armv8) SoC @ 2.4GHz
<b>Memory:</b>	Options for 2GB, 4GB, 8GB, 16GB LPDDR4-4267 SDRAM with ECC Options for 0GB (Lite), 16GB, 32GB or 64GB eMMC flash memory See table below for full list of variant options
<b>Connectivity:</b>	Options for certified radio module containing: <ul style="list-style-type: none"><li>• 2.4 GHz / 5.0 GHz IEEE 802.11 b/g/n/ac wireless</li><li>• Bluetooth 5.0, BLE</li><li>• On-board electronic switch to select between PCB trace or external antenna</li></ul> Gigabit Ethernet PHY supporting IEEE 1588 1 × PCIe x1 root complex, Gen 2 (5Gbps) 1 × USB 2.0 port (high speed) 2 × USB 3.0 ports, supporting simultaneous 5Gbps operation Up to 30 × GPIO supporting either 1.8V or 3.3V signalling and peripheral options: <ul style="list-style-type: none"><li>• Up to 5 × UART</li><li>• Up to 5 × I2C</li><li>• Up to 5 × SPI</li><li>• 1 × SDIO interface</li><li>• 1 × DPI (parallel RGB display)</li><li>• 1 × I2S</li><li>• Up to 4 × PWM channels</li><li>• Up to 3 × GPCLK outputs</li></ul>
<b>Video:</b>	2 × HDMI 2.0 ports (supports up to 4Kp60 on both ports simultaneously)  2 × 4-lane MIPI ports supporting both DSI (display port) and CSI-2 (camera port)
<b>Multimedia:</b>	4Kp60 HEVC decoder OpenGL ES 3.1 graphics, Vulkan 1.2 1 × SDIO 2.0 (CM5 Lite)


<b>Input power:</b>	Single +5V PSU input supports USB PD for up to 5A @ 5V
<b>Operating temperature:</b>	-20°C to +85°C
<b>MTBF<sup>1</sup> Ground Benign:</b>	143 000 hours (168 000 hours CM5 Lite)
<b>Production lifetime:</b>	Raspberry Pi Compute Module 5 will remain in production until at least January 2036
<b>Compliance:</b>	For a full list of local and regional product approvals, please visit <a href="http://pip.raspberrypi.com">pip.raspberrypi.com</a>

<sup>1</sup> Mean Time Between Failure

Part Number	Wireless	RAM	eMMC	
CM5002000	No	2GB	0GB (Lite)	
CM5002016			16GB	
CM5002032			32GB	
CM5002064			64GB	
CM5004000		4GB	0GB (Lite)	
CM5004016			16GB	
CM5004032			32GB	
CM5004064			64GB	
CM5008000		8GB	0GB (Lite)	
CM5008016			16GB	
CM5008032			32GB	
CM5008064			64GB	
CM5016000		16GB	0GB (Lite)	
CM5016016			16GB	
CM5016032			32GB	
CM5016064			64GB	
CM5102000	Yes	2GB	0GB (Lite)	
CM5102016			16GB	
CM5102032			32GB	
CM5102064			64GB	
CM5104000		4GB	0GB (Lite)	
CM5104016			16GB	
CM5104032			32GB	
CM5104064			64GB	
CM5108000		8GB	0GB (Lite)	
CM5108016			16GB	
CM5108032			32GB	
CM5108064			64GB	
CM5116000		16GB	0GB (Lite)	
CM5116016			16GB	
CM5116032			32GB	
CM5116064			64GB	

\* pricing excludes sales tax and any applicable import duties

## Physical specification

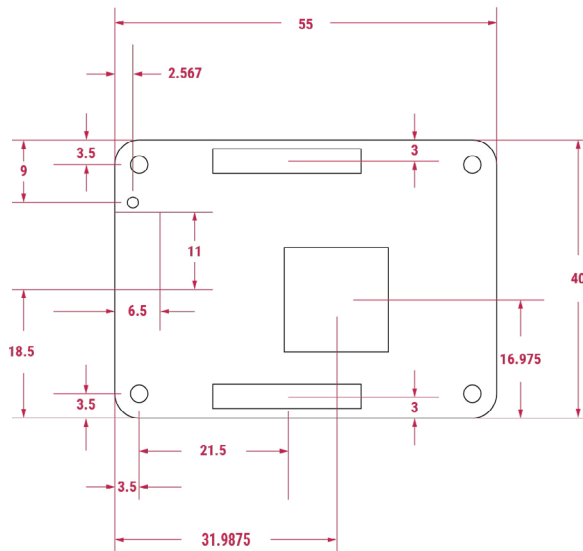

### Note:

All dimensions in mm

All dimensions are approximate and for reference purposes only. The dimensions shown should not be used for producing production data

The dimensions are subject to part and manufacturing tolerances

Dimensions may be subject to change

## WARNINGS

- Any external power supply used with Raspberry Pi Compute Module 5 shall comply with relevant regulations and standards applicable in the country of intended use and be a limited power source or PS2 power source per IEC 62368-1.
- This product should be operated in a well-ventilated environment, and if used inside a case, the case should not be covered.
- Whilst in use, this product should not be contacted by conductive items.
- The connection of incompatible devices to Compute Module 5 may affect compliance, result in damage to the unit, and invalidate the warranty.
- All peripherals used with this product should comply with relevant standards for the country of use and be marked accordingly to ensure that safety and performance requirements are met. These articles include but are not limited to keyboards, monitors, and mice when used in conjunction with the Compute Module.
- The cables and connectors of all peripherals used with this product must have adequate insulation so that relevant safety requirements are met.

## SAFETY INSTRUCTIONS

**To avoid malfunction or damage to this product, please observe the following:**

- Do not expose to water or moisture, or place on a conductive surface whilst in operation.
- Do not expose to heat from any source; Raspberry Pi Compute Module 5 is designed for reliable operation at normal ambient temperatures.
- Take care whilst handling to avoid mechanical or electrical damage to the printed circuit board and connectors.
- Whilst it is powered, avoid handling the printed circuit board, or only handle it by the edges to minimise the risk of electrostatic discharge damage.





Raspberry Pi is a trademark of Raspberry Pi Ltd

---