


# Power Beads - PGL725XHLT Series Coupled Inductor

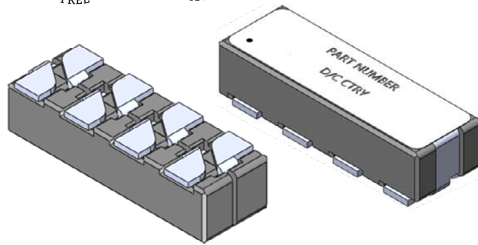

## Features and Benefits:

- Ⓢ High current multi-phase coupled inductor
- Ⓢ Max height 6mm
- Ⓢ Ferrite core material
- Ⓢ Operating frequency range: ~3MHz
- Ⓢ For use with ADI/Maxim Integrated Products Multi - Phase Controllers

### Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Heating current per phase (A)	OCL @ 0 Ade (nH±20%)				OCL @ Isat 1&2 (nH MIN)	Isat1 @ 25°C (A)	*Isat2 @ 105°C (A TYP)	DCR (mΩ) Max.	SCL @ 0 Adc (nH)	SCL @ Isat 3 (nH MIN)	Isat3 @ 105°C (A)
		PHASE 1 2-1	PHASE 2 4-3	PHASE 3 6-5	PHASE 4 8-7							
PGL7252HLT	40	170	170	\	\	110	24	20	0.25	35±20%	22	*100
PGL7253HLT	40	170	180	170	\	110	24	20	0.25	35±20%	22	*100
PGL7254HLT	40	170	180	180	170	110	24	20	0.25	35±20%	22	*100

#### Notes:




1. Open circuit inductance (OCL) test parameters: 1MHz, 0.1V, 0Adc.
2. Isat 1 & Isat 2 for OCL, Isat3 for SCL are the DC current which cause the inductance drops by 20% TYP.
3. Short circuit inductance (SCL):
  - A. PGL7252HLT: Measure (2-3) with shorted (1,4), and divide by 2.
  - B. PGL7253HLT: Measure (2-5) with shorted (1,4), (3,6), and divide by 3.
  - C. PGL7254HLT: Measure (2-7) with shorted (1,4), (3,6), (5,8) and divide by 4.
4. The items on indicated \* are guaranteed by design and verified by design stage. Will not test for production.
5. The heating current, or rms current, per phase is calculated to produce a 45°C rise above the ambient temperature.
6. In high volt\*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
7. The temperature of the component (ambient plus temperature rise) must be within the stated operating range.
8. Optional tape and reel packaging can be ordered by adding a T suffix to the part-number (ie: PGL7252HL becomes PGL7252HLT). Pulse complies to the industry standard tape and reel specification EIA481.

# Power Beads - PGL725XHLT Series Coupled Inductor

## MECHANICALS

## SCHEMATIC

PGL7252HLT


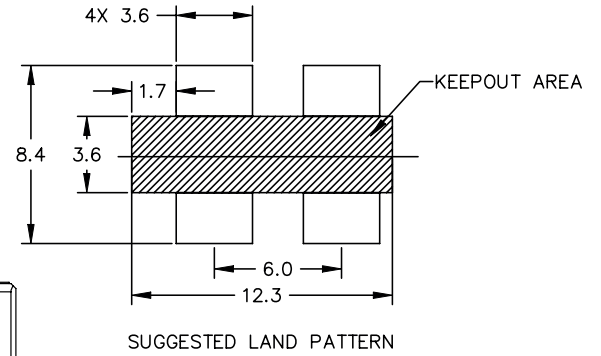
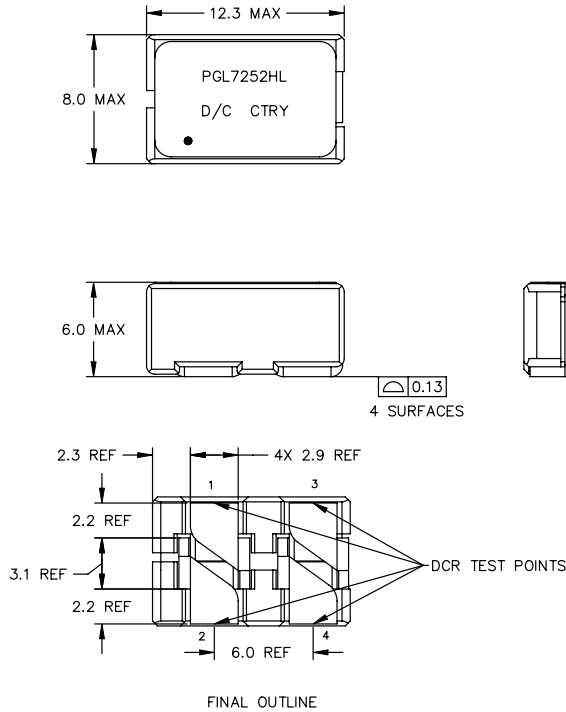


**Weight:** 2.4g  
**Dimensions:** mm  
 Unless stated otherwise  
 the tolerance on the  
 listed dimensions are:  
 X  $\pm 0.2$   
 XX  $\pm 0.10$

## MECHANICALS

## SCHEMATIC

PGL7253HLT

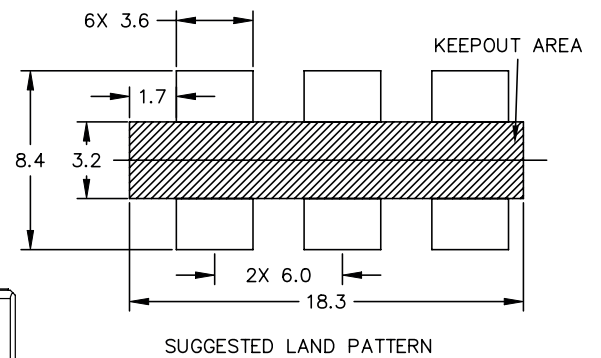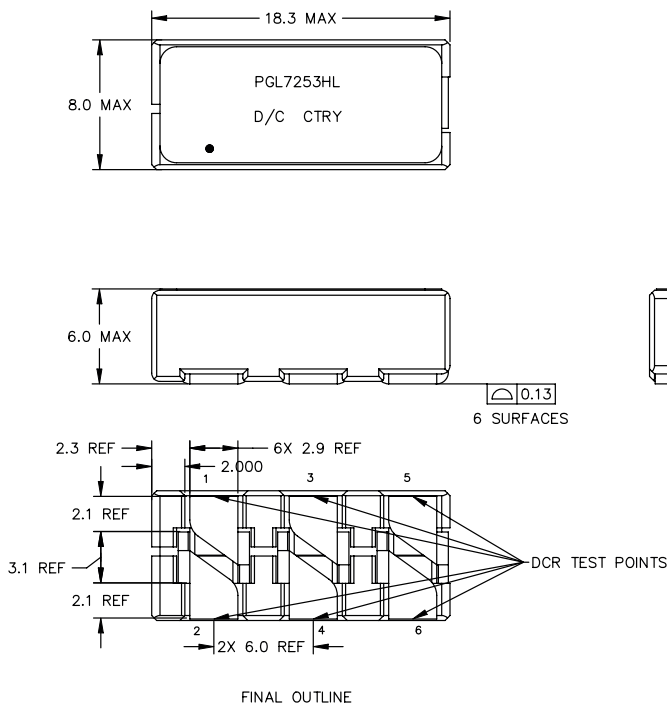




**Weight:** 3.65g  
**Dimensions:** mm  
 Unless stated otherwise  
 the tolerance on the  
 listed dimensions are:  
 X  $\pm 0.2$   
 XX  $\pm 0.10$

# Power Beads - PGL725XHLT Series Coupled Inductor

## MECHANICALS

## SCHEMATIC


### PGL7254HLT

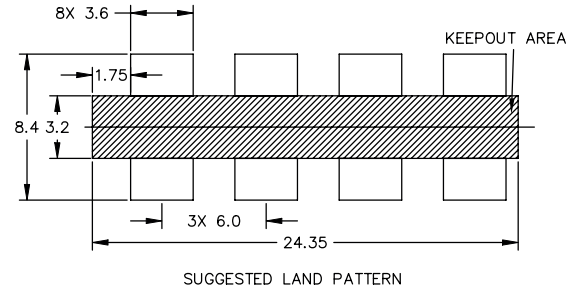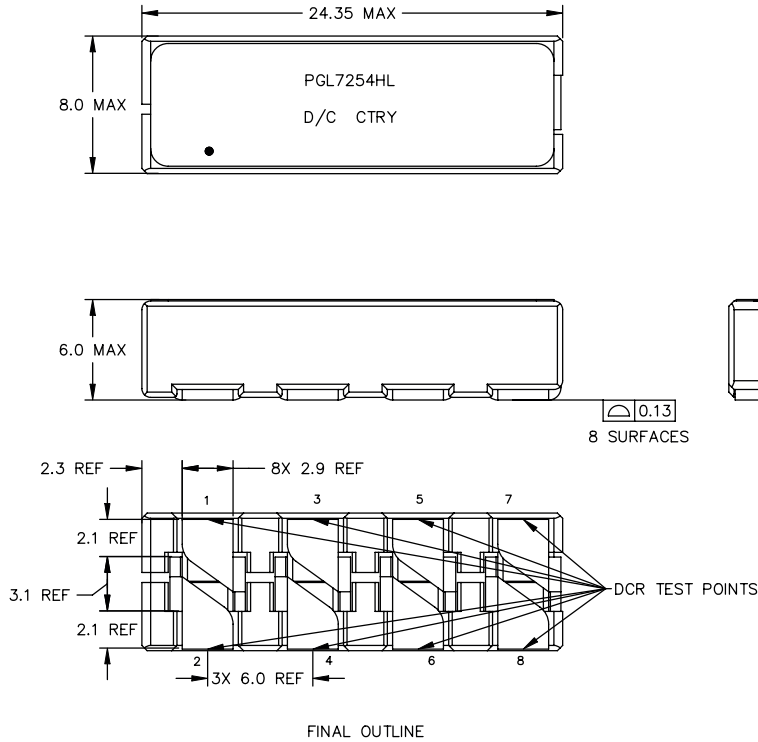

**Weight:** 4.9g  
**Dimensions:** mm  
 Unless stated otherwise  
 the tolerance on the  
 listed dimensions are:  
 X ±0.2  
 XX ±0.10


## OCL vs I curve

### PGL7252HLT

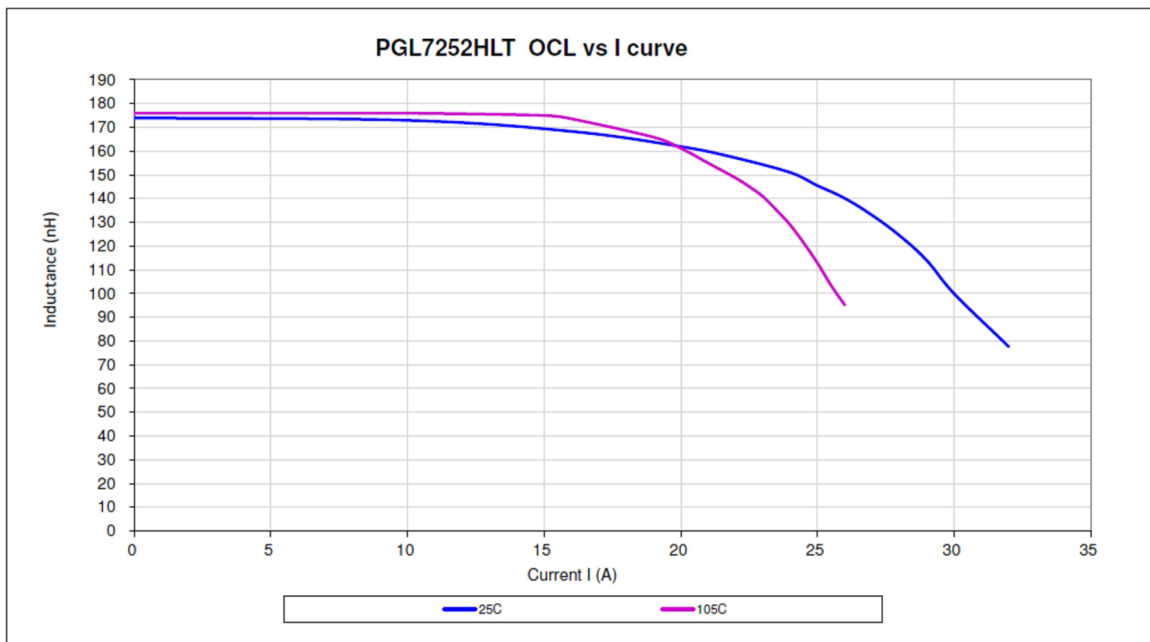


## OCL vs I curve

PGL7253HLT

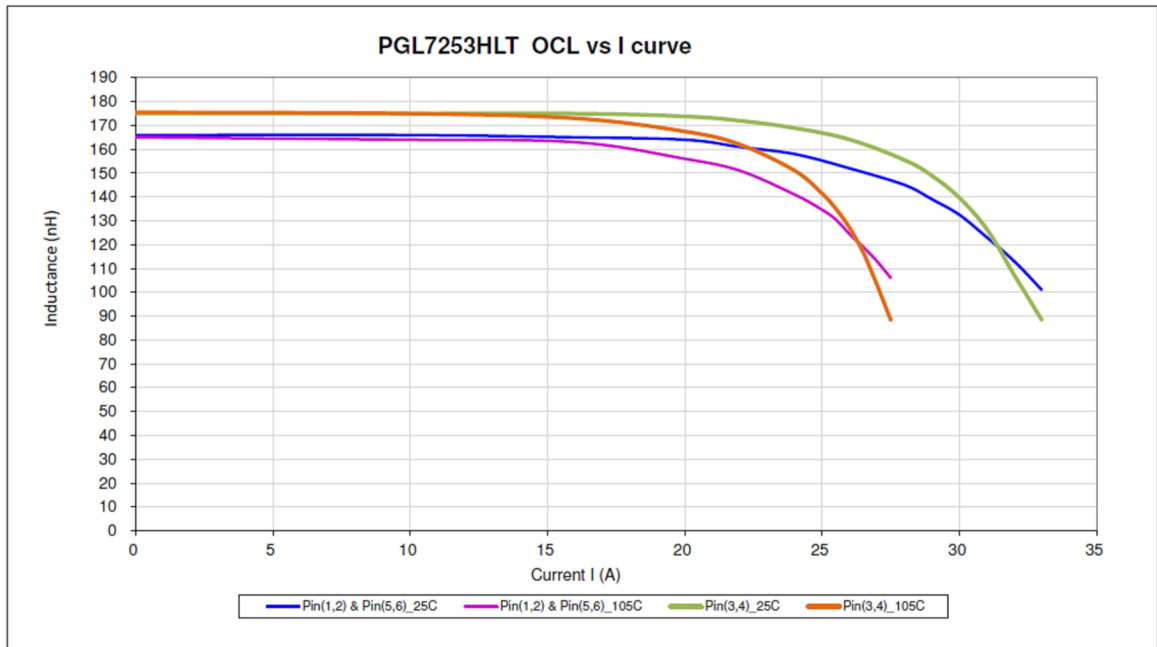


## OCL vs I curve

PGL7254HLT

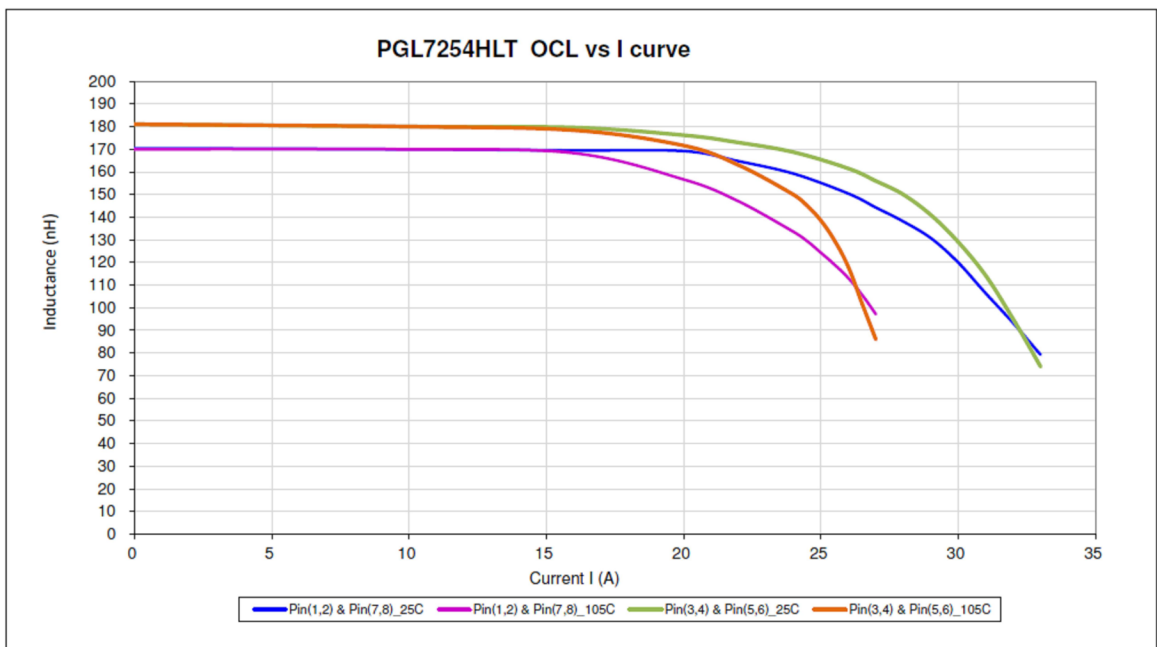


## SCL vs I curve

PGL7252HLT

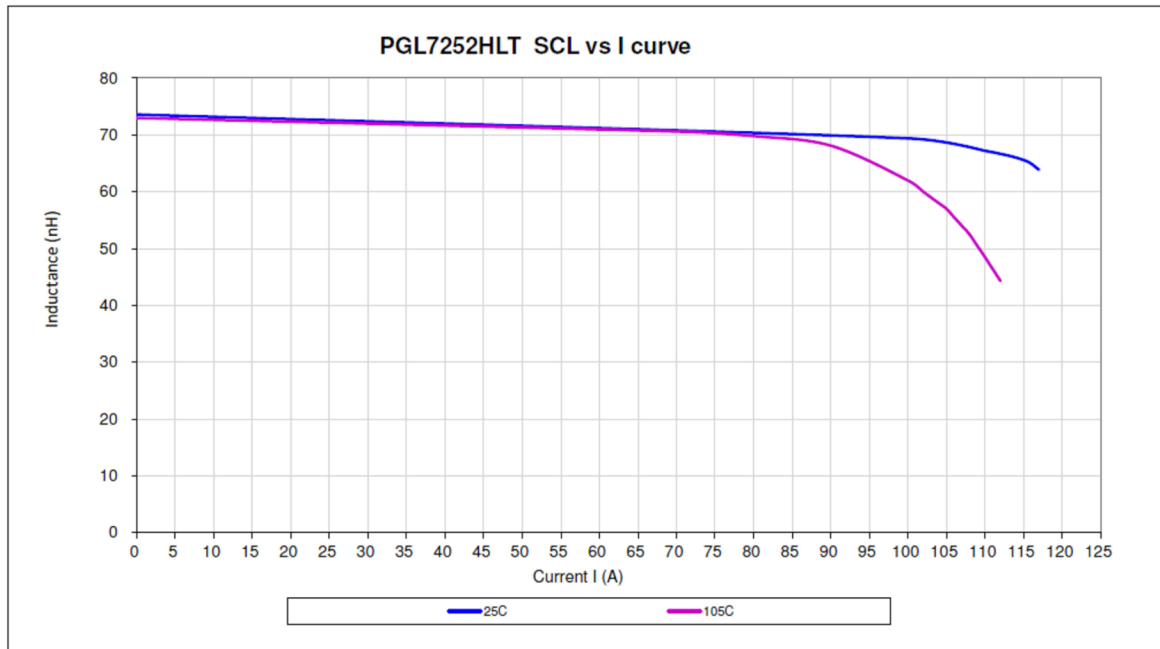


## SCL vs I curve

PGL7253HLT

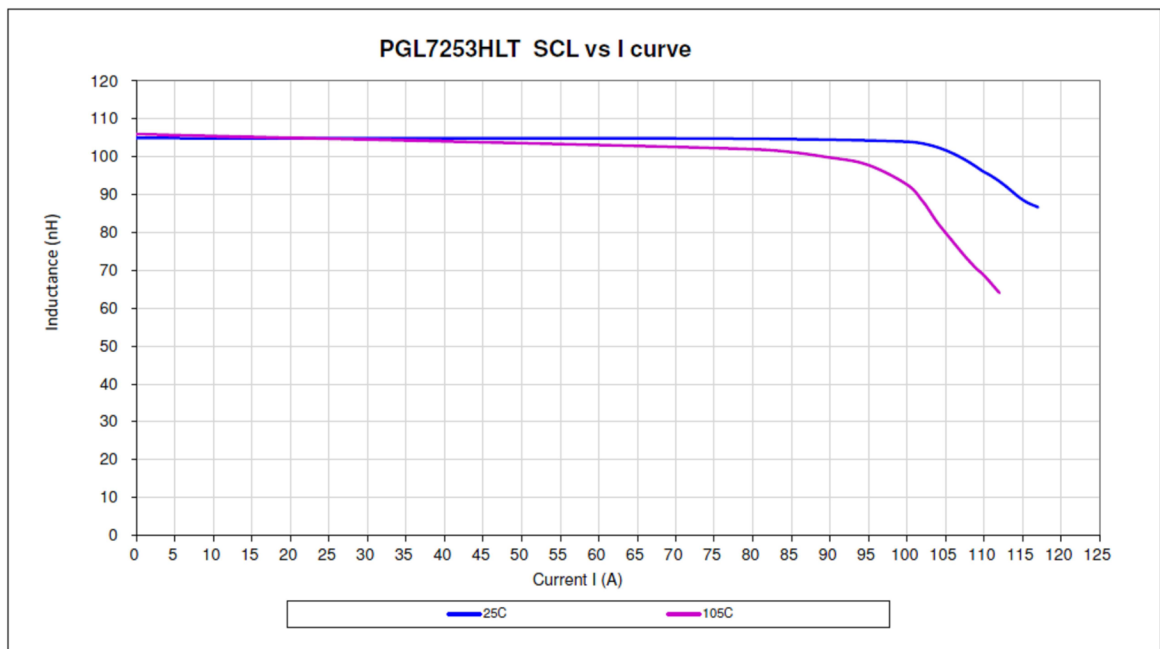


## SCL vs I curve

PGL7254HLT

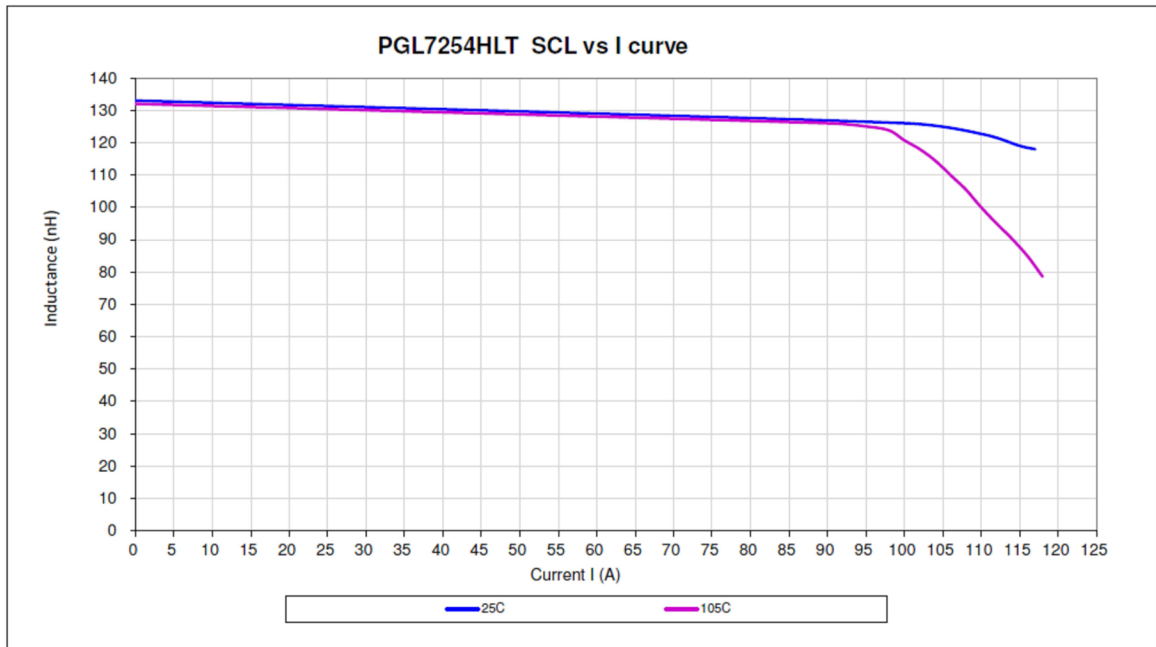

## TAPE AND REEL PACKING DETAILS

**PGL725XHLT**

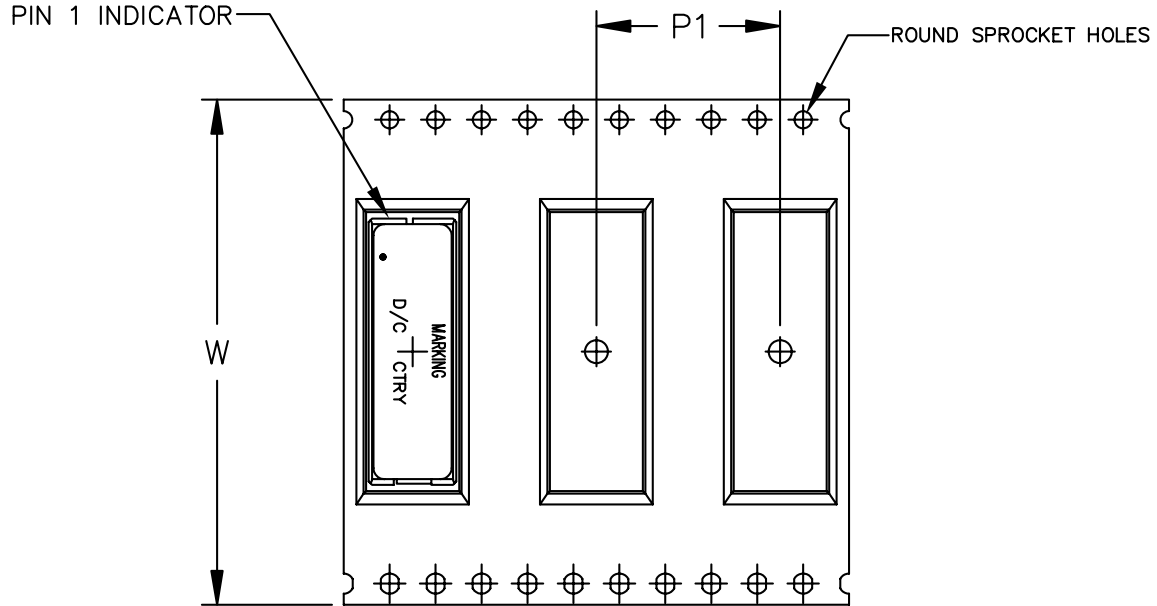

SURFACE MOUNTING TYPE, REEL/TAPE LIST					
PART NUMBER	REEL SIZE (mm)	TAPE SIZE (mm)			QTY
	A	$P_1$	W	$K_0$	PCS/REEL
PGL7252HLT	Ø330	16	24	6.2	600
PGL7253HLT	Ø330	16	32	6.2	600
PGL7254HLT	Ø330	16	44	6.2	600

### For More Information:

Americas - [prodinfo\\_power\\_americas@yageo.com](mailto:prodinfo_power_americas@yageo.com) | Europe - [prodinfo\\_power\\_emea@yageo.com](mailto:prodinfo_power_emea@yageo.com) | Asia - [prodinfo\\_power\\_asia@yageo.com](mailto:prodinfo_power_asia@yageo.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.