

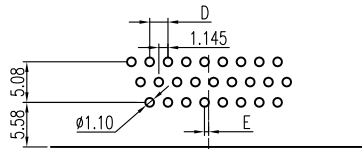
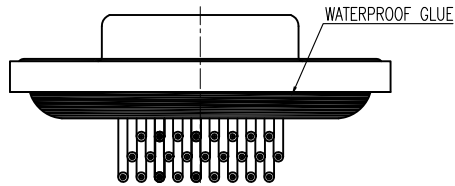


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.



Customer Drawing

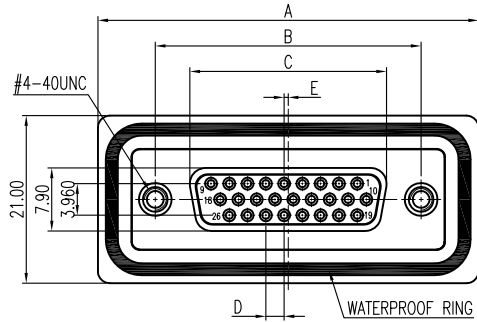


RECOMMENDED P.C.B LAYOUT
Tolerance: ±0.05mm

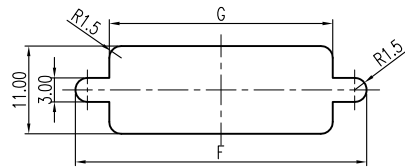


RECOMMENDED PANEL CUT-OUT
Tolerance: ±0.05mm

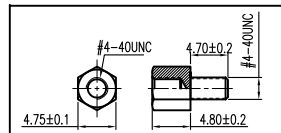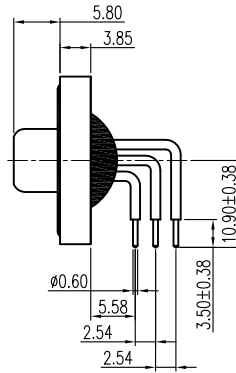

4.8*9.5 SCREW

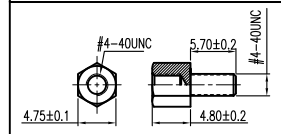

4.8*10.5 SCREW



Screw L=4.7 For Panel Thickness Under 1.2mm

Screw L=5.7 For Panel Thickness Between 1.2~2.0mm



NO.	A	B	C	D	E	F	G
15S	39.40	24.99	16.33	2.29	0.25	28.20	20.00
26S	47.70	33.32	24.66	2.29	0.51	36.50	28.00
44S	64.50	47.04	38.38	2.29	0.51	51.00	41.50


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	06/22/10	IP
2	HK--	Update the Drawing	02/25/14	IP
3	HK--	Update the Drawing	03/09/16	IP

D-SUB TECHNICAL DATA

SHELL : SPCC. 80u" min nickel over 50u" min copper
 BODY : PBT, UL 94V-0, Color:Black.
 CONTACTS : Copper Alloy,gold flash plated over 50u" min nickel
 WATERPROOF RING: Silica Gel.
 WATERPROOF GLUE: Epoxy.
 SCREWLOCK : Copper Alloy, Nickel Plated.
 RIVET : Copper Alloy, Nickel Plated.
 ELECTRICAL : Voltage rating : 250 VAC(RMS)
 Current rating : 5 Ampere per Contact
 Insulation Resistance : 5000 Megohms Min.
 Withstanding Voltage 1000V AC(RMS)
 Contact Resistance : 10 Milliohms Max.
 Waterproof Rate: IP 67 Min.
 MARKING : Amphenol
 Manufacturing date

PRODUCT CODE

L 17EHD XX S 3 X

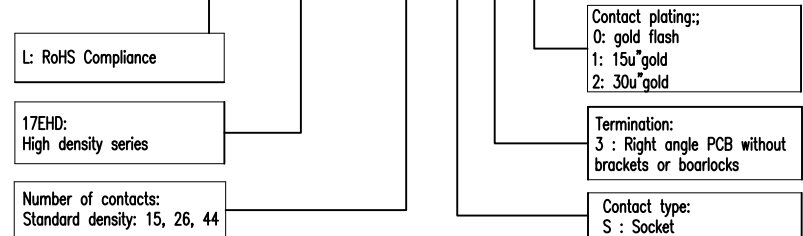

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	FILED	
.X +/-	0.50	Felix Liu		03/09/16
.XX +/-	0.30	CHECKED Tony Tang		03/09/16
.XXX +/-	0.20	CHECKED		
FRACTIONS +/-	5'	DRAWING FILE :		
ANGLES +/-		ANGLE OF PROJECTION		
FOR MATERIALS AND FINISHES SEE NOTES				
REMOVE SHARP EDGES				
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol		
TITLE D-sub, Waterproof Series		
SIZE	DRAWING NO.	REV.
A4	L17EHDXXS3X	3
SCALE	NONE	SHEET 1 OF 1