

Darlington Transistor



Features:

- Medium-power complementary Silicon Transistors for use as output devices in complementary general purpose amplifier applications
- High DC Current Gain
 $h_{FE} = 1,000$ (Typical) at $I_C = 5A$
- Monolithic construction with built Base-Emitter Shunt Resistors

Maximum Ratings:

Characteristic	Symbol	MJ2501	Unit
Collector-Emitter Voltage	V_{CEO}	80	V
Collector-Emitter Voltage	V_{CEX}		
Emitter-Base Voltage	V_{EBO}	5	
Collector Current - Continuous - Peak	I_C	10 12	A
Base Current	I_B	0.2	
Total Power Dissipation at $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	150 0.857	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +200	$^\circ C$

Electrical Characteristics: ($T_C = +25^\circ C$ unless otherwise noted)

Parameter	Symbol	Min.	Max.	Unit
-----------	--------	------	------	------

OFF Characteristics

Collector-Emitter Sustaining Voltage (1) ($I_C = 200mA, I_B = 0$)	$V_{CEO(SUS)}$	80	-	V
Collector Cut off Current ($V_{CE} = 80V, R_{BE} = 1k\Omega$) ($V_{CE} = 80V, R_{BE} = 1k\Omega, T_C = 150^\circ C$)	I_{CER}	-	1 5	mA
Emitter Cut off Current mA ($V_{EB} = 5V, I_C = 0$)	I_{EBO}	-	2	
Collector Cut off Current ($V_{CE} = 40V, I_B = 0$)	I_{CER}	-	1	

ON Characteristics

DC Current Gain ($I_C = 5A, V_{CE} = 3V$)	h_{FE}	1,000	-	-
Collector-Emitter Saturation Voltage ($I_C = 5A, I_B = 20mA$) ($I_C = 10A, I_B = 50mA$)	$V_{CE(sat)}$	-	2 4	V
Base - Emitter On Voltage ($I_C = 5A, V_{CE} = 3V$)	$V_{BE(sat)}$	-	3	

(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$



Darlington Transistor



Thermal Characteristics:

Characteristic	Symbol	Max.	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.17	$^{\circ}\text{C}/\text{W}$

Power Derating

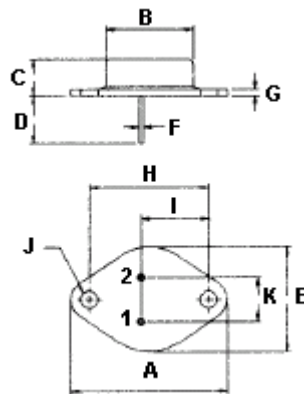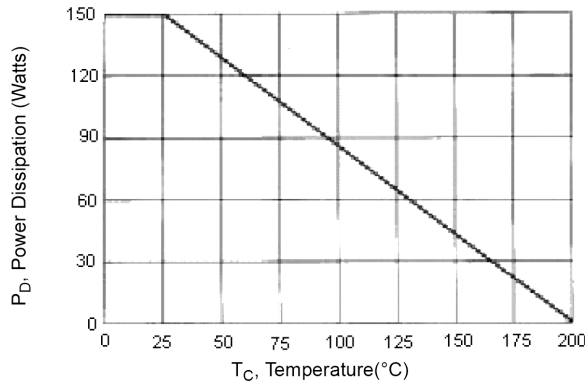

Dim.	Min.	Max.
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.2	26.67
F	0.92	1.09
G	1.38	1.62
H	29.9	30.4
I	16.64	17.3
J	3.88	4.36
K	10.57	11.16

Dimensions : Millimetres

Part Number Table

Description	$I_c(av)$ Max. (A)	V_{ce} Max (V)	h_{fe} Min.	I_c (A)	P_{tot} at 25°C (W)	Package	Type	Part Number
Darlington Transistor, TO-3	10	80	1,000	5	150	TO-3	PNP	MJ2501

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

