


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005	* Effective: 12/21/98		* DCP No: 880			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	A	RELEASED	J.C.	2/10/92				
1090	B	REDRAWN, WAS ON SBC-320*C	HYO	10/15/01	JC	10/16/01	JC	10/16/01

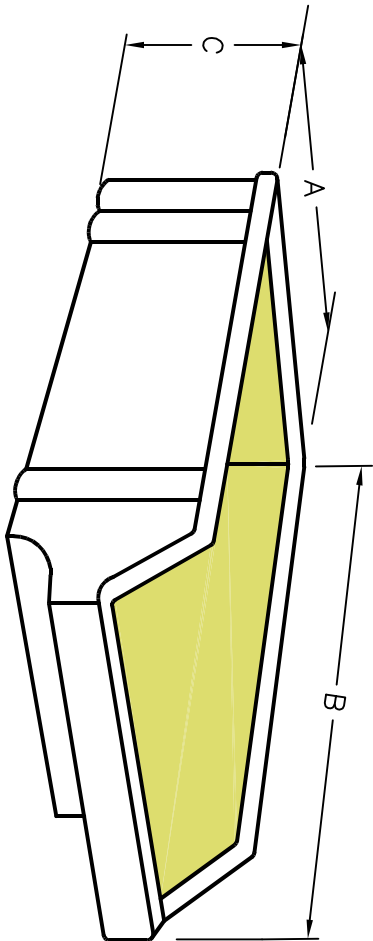

SPC Type No.	Dimensions		
	A	B	C
SBC-3206		5 1/8	2
SBC-3207	4 7/8	6 5/8	3
SBC-3208		8 7/8	3 7/8
SBC-3205		12	5 7/8

SPECIFICATIONS:

1. Material: Carbon filled hi-impact polypropylene plastic, Black
2. Built in accordance with the guidelines of DOD-HDT3K-263
3. Meets ASTM Standard D257 for volume and surface resistivity
4. MIL B81705 for Static decay
5. Conductive: 10^9 ~ 10^{13} ohms/inch²
6. Anti - static: 10^9 ~ 10^{13} ohms/inch²

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
JOHN COLE	2/10/92
CHECKED BY:	DATE:
APPROVED BY:	DATE:



SPC TECHNOLOGY

DRAWING TITLE:

CONDUCTIVE STORAGE BINS

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-432	TA-432.DWG	B
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1