

# Features

# Regulated Converters

- Long 5 Year Warranty
- 2MOPP/250VAC
- Suitable for built in Class II Applications
- Wide Input Voltage Range (85-264VAC)
- Low Leakage Current (<75µA)
- 5000m Operation
- Active Power Factor Correction
- Connector Set available



## RACM100

**100 Watt  
Enclosed  
Case Style  
Single Output**



### Description

The RACM100 is a compact 3"x2" high efficiency AC/DC power supply with 2xMOPP safety approval for medical applications. These space saving enclosed power supplies have an universal input voltage range (85-264VAC), 4kVac isolation, require no minimum load and can be used at ambient temperatures of between -25°C and +85°C. The 12V, 15V, 24V or 48V output voltages are fully protected and have tolerances of less than ±0.2% over the entire input voltage range and less than ±0.5% over the entire load range. The RACM100 series is certified to medical safety standard IEC/ES/EN-60601-1 3rd Edition and feature BF rated outputs with less than 75µA leakage current. It has a built-in Class B EMI filter and comes with a five year warranty.

### Selection Guide

Part Number	Input Voltage Range (VAC)	Output Voltage (VDC)	Output Current (A)	Input Power @ No Load (W)	Efficiency typ. (%)
RACM100-12S	85-264	12	8.34	0.3	91
RACM100-15S	85-264	15	6.67	0.3	92
RACM100-24S	85-264	24	4.17	0.3	92
RACM100-48S	85-264	48	2.09	0.3	91



### Specifications (measured at TA= 25°C, 250VAC, full load and after warm-up)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Voltage		85VAC 120VDC		264VAC 370VDC
Input Current	115VAC, full load 230VAC, full load			1.15A 0.55A
Absolute max. Input Current	cold start, 230VAC			60A
Input Frequency	AC Input	47Hz		63Hz
Start-up Time				1 Second
Rise Time			20ms	
Hold up Time	115VAC, full load	16ms		
Minimum Load				0%
Power Factor		0.95		
Switching Frequency			60kHz	
Output Ripple and Noise (measured @ 20MHz BW)	12VDC, with 10µF/25V MLCC 15VDC, with 10µF/25V MLCC 24VDC, with 1µF/50V MLCC 48VDC, with 0.1µF/100V MLCC		120mVp-p 150mVp-p 160mVp-p 340mVp-p	

continued on next page




2MOPP  
250VAC



EN-55011 Certified  
EN-55022 Certified  
ES-60601 Certified  
IEC/EN-60601 Certified

Refer to Applications Notes

Specifications (measured at  $T_A = 25^\circ\text{C}$ , 250VAC, full load and after warm-up)

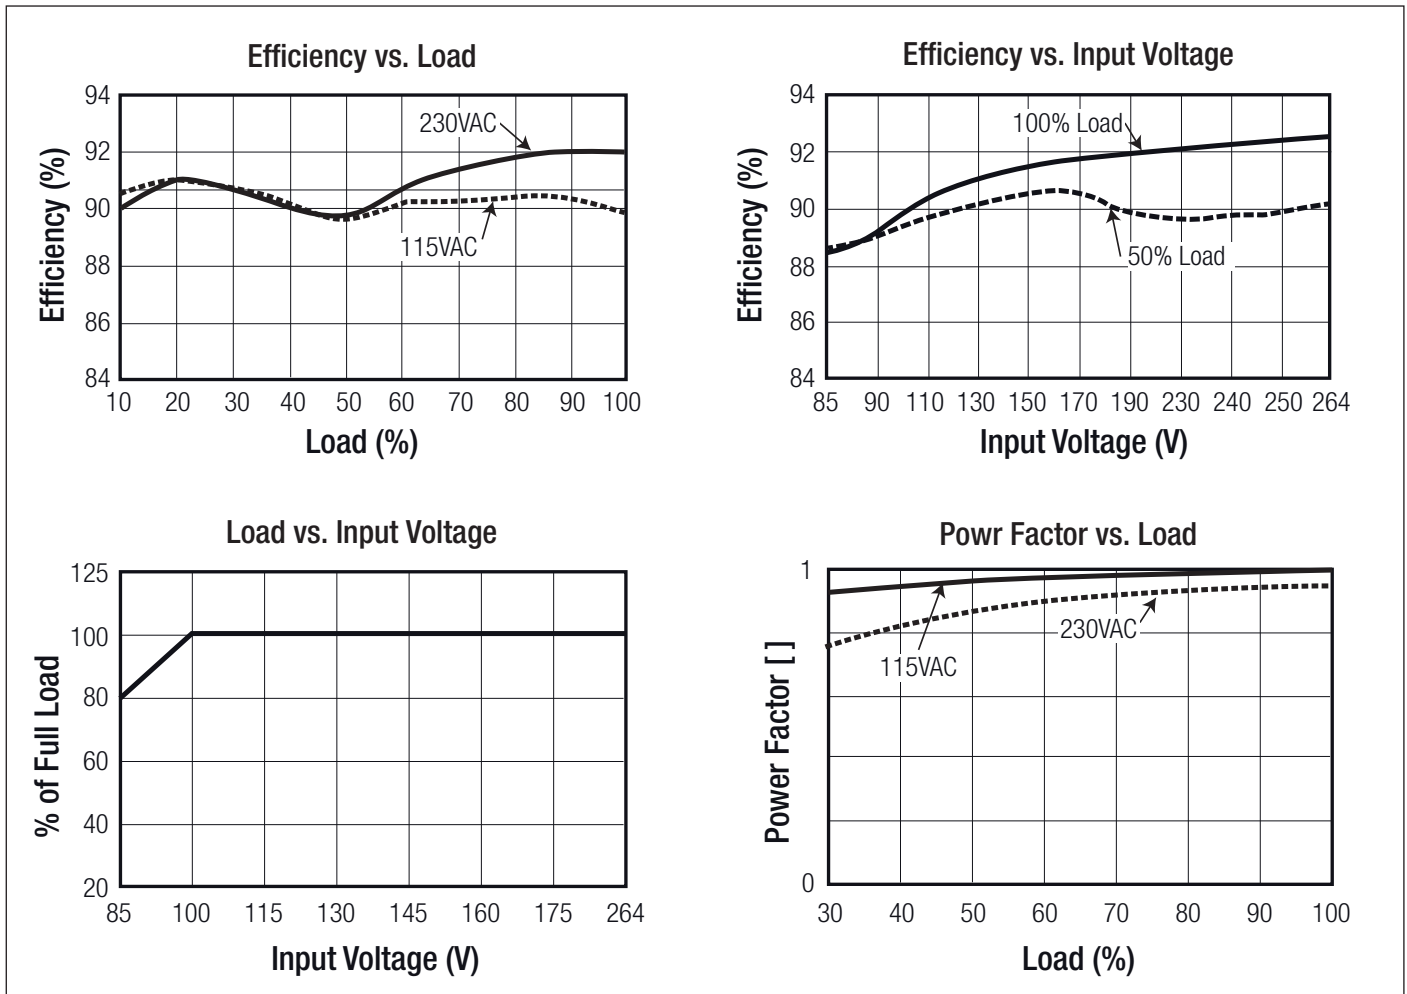

REGULATIONS			
Parameter	Condition	Type	Value
Output Voltage Accuracy	230VAC, full load		$\pm 1\%$
Line Voltage Regulation	low line to high line, full load		$\pm 0.2\%$
Load Voltage Regulation	0% to 100% load		$\pm 0.5\%$ max.
	10% to 100% load		$\pm 0.4\%$ max.
Output Voltage Trim			$\pm 10\%$
Transient Peak Deviation	load step from 50% - 75% change at 2.5A/ $\mu\text{s}$		3% $V_{out}$ max.
Transient Recovery Time	load step from 50% - 75% change at 2.5A/ $\mu\text{s}$		500 $\mu\text{s}$ typ.

PROTECTIONS		
Parameter	Condition	Value
Input Fuse	internal line and neural	T3.15A / 250VAC, slow blow type
Short Circuit Protection (SCP)		continuous, auto-recovery
Over Load Protection (OLP)	% of $I_{out}$ rated	Hiccup Mode, 115% min. / 150% ,ax.
Over Voltage Protection (OVP)	% of $V_{out}$ nominal	Latch Mode, 115% min / 135% max.
Isolation Voltage (2MOPP insulation)	I/P to O/P	4kVAC / 1 minunte
	I/P to Chassis	1.5kVAC / 1 minute
	O/P to Chassis	1.5kVAC / 1 minunte
	working voltage	250VAC / continuous

continued on next page


**Specifications** (measured at  $T_A= 25^\circ\text{C}$ , 250VAC, full load and after warm-up)

Leakage Current	264VAC	75 $\mu$ A max.
Clearance	I/P to O/P	6.5mm
Creepage	I/P to O/P	8mm
Isolation Resistance	500VDC	100M $\Omega$ min.

**ENVIRONMENTAL**

Parameter	Condition	Value
Relative Humidity	non-condensing	5% to 95% RH
Temperature Coefficient		$\pm 0.02\%$ / $^\circ\text{C}$
Operating Temperature Range	with derating	$-25^\circ\text{C}$ to $+85^\circ\text{C}$
Storage Temperature Range		$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Operating Altitude		5000m max.
MTBF ( $+25^\circ\text{C}$ )	according to MIL-HDBK-217F, full load	$7903 \times 10^5$ hours

**Derating Graph**

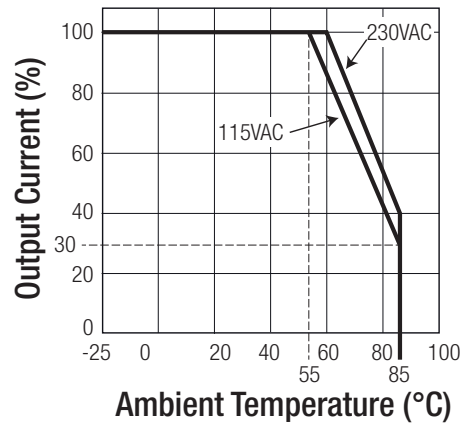

**SAFETY AND CERTIFICATIONS**

Certificate Type	Report / File Number	Standard
IEC/EN Medical Safety		IEC/EN-60601-1 Medical Report + ISO14971 Risk Assessment
ANSI/AAMI Medical Safety	E314885	ES60601-1
CAN/CSA Medical Safety	E314885	C22.2 No. 60601-1

Certificate Type (Environmental)	Condition	Standard / Criterion
ESD	Air $\pm 8\text{kV}$ ; Contact $\pm 6\text{kV}$	EN61000-4-2, Criteria A
Radiated Immunity	20V/m	EN61000-4-3, Criteria A
Fast Transient	$\pm 2\text{kV}$	EN61000-4-4, Criteria A
Surge	DM $\pm 1\text{kV}$ and CM $\pm 2\text{kV}$	EN61000-4-5, Criteria A
Conducted Immunity	20Vr.m.s	EN61000-4-6, Criteria A
Power Frequency Magnetic Field	10A/m	EN61000-4-8, Criteria A
Harmonic Current	full load	EN61000-3-2; Class A and D
Voltage Flicker		EN61000-3-3, PASS
Thermal Shock		MIL-STD-810F
Shock		IEC68-2-27
Vibration		IEC68-2-6
Dip and Interruptions, 230VAC 50Hz	30% 500ms 60% 100ms >95% 10ms >95% 5000ms	EN60601-1-2, Criteria A EN60601-1-2, Criteria A EN60601-1-2, Criteria A EN60601-1-2, Criteria B


Specifications (measured at  $T_A = 25^\circ\text{C}$ , 250VAC, full load and after warm-up)

## DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	Case	Aluminum
Package Dimensions (LxWxH)		91.4 x 62.0 x 39.2mm
Package Weight		210g
Packaging Dimensions (LxWxH)	Cardboard Box	418 x 258 x 105mm
Packaging Quantity	Cardboard Box	10pcs

### Mechanical Dimensions (mm)

Top View

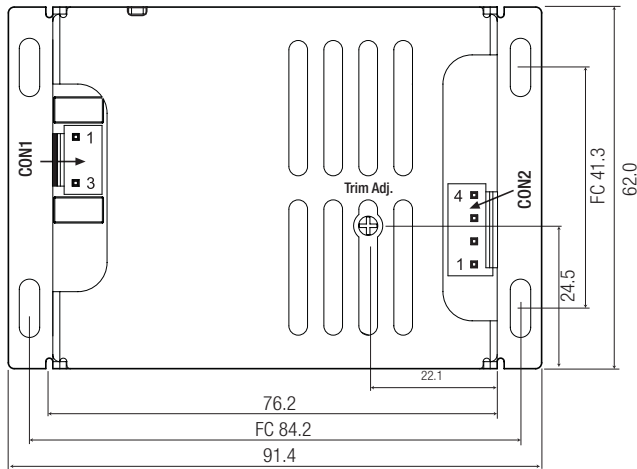

#### CON1 - Input

- Pin1 Line
- Pin3 Neutral

Mates with  
JST housing: VHR-3N  
JST crimp terminals: SVH-21T-P1.1

Side View



#### CON2 - Output

- Pin1,2 -Vout
- Pin3,4 +Vout

Mates with  
JST housing: VHR-4N  
JST crimp terminals: SVH-21T-P1.1

Tolerance:  $\pm 0.5\text{mm}$   
FC: fixing center

Bottom View



The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.