

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0470533000](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: [KK® 254 Vertical Header, with Friction Lock, 4 Circuits, PC Tail Length: 4.00mm](#)

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

UL E29179

General


Product Family PCB Headers
 Series [47053](#)
 Application Signal, Wire-to-Board
 Comments Overall Pin Length: 14.00mm
 Overview [KK® Interconnect System - Molex](#)
 Product Name [KK® 254](#)
 UPC 883906118686

Physical

Breakaway No
 Circuits (Loaded) 4
 Circuits (maximum) 4
 Durability (mating cycles max) 25
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Metal Copper Alloy
 Material - Plating Mating Tin
 Material - Plating Termination Copper
 Net Weight 0.394/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.00mm
 PCB Locator Yes
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 2.54mm
 Pitch - Termination Interface 2.54mm
 Plating min - Mating 5.080µm
 Plating min - Termination 5.080µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded No
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 4.0A

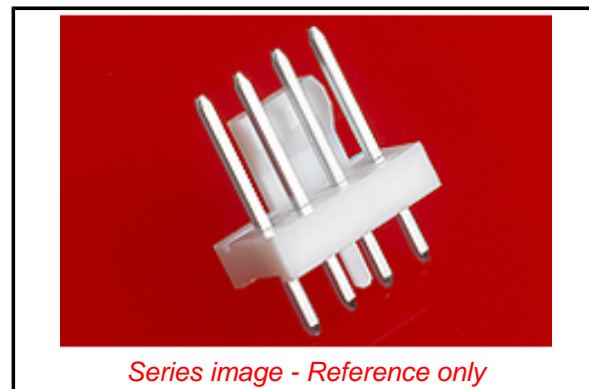

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/108/2014 (17 Dec
 2014)

Halogen-Free

Status

Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

[47053](#) Series

Mates With

2.54mm Pitch [KK® Crimp Housing 47054](#) ,
[2695](#)

Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005

Lead-free Process Capability WAVE

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 235

Material Info

Reference - Drawing Numbers

Sales Drawing SD-47053-001

This document was generated on 07/20/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION