



NEUTRIK

NBNC75BUU11X

The rearTWIST UHD BNC connectors are specifically designed for high resolution video signal transmissions. Due to the unique insulator and contact pin design, the connectors feature low return loss values for 4K and 8K signals.


Features & Benefits

- Optimized contact pin and insulator design for UHD-data transmissions
- Proven rearTWIST technology
- Swiss antralooy plating
- Fully compatible with conventional BNC chassis connectors
- Improved return loss values at high frequencies



Optimized Return Loss

Due to optimized insulator design and reduced crimp diameter from center pin the Neutrik rearTWIST UHD BNC connector achieves increased headroom compared to conventional BNC connectors and offers additional return loss reserve for potential impedance deviations resulting from cable bending, incorrect connector assembly or faulty connection interfaces without signal interruption.

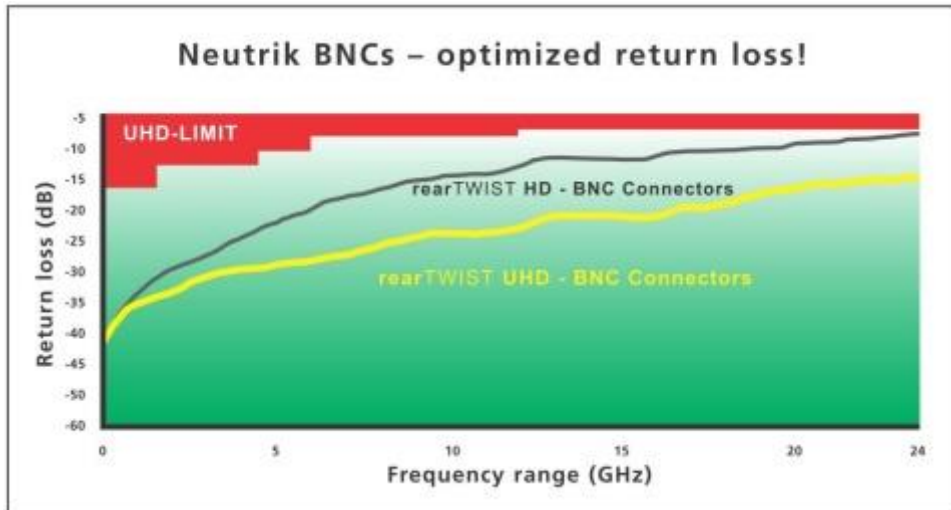

For more details see Neutrik UHD BNC White Paper.

Crimp Dimensions

In order to achieve optimum return loss values at high frequencies the crimp dimension of the contact pin has been reduced.

- Pin: 1.07 mm
- Shield: 7.36 mm
- Crimp die: DIE-R-BNCX-PU

Approved Cables

To guarantee high performance for each cable-connector combination at high frequencies Neutrik measured common COAX cables which are specifically designed for ultra high definition transmission (UHD). Find all approved cables listed below.

Suitable cables:

Argosy Image 1000, Cordial CVI 10-48 HD, Draka 1.0/4.8 AF, Draka 755-901/5, Klotz V10/48, Percon VK7

UHD optimized cables:

Belden 1694A, Belden 1694ANH, Belden 1694DNH, Belden 70082, Belden 70082NH, Belden 70082CH



Technical Information

Product

Title	NBNC75BUU11X
Connection Type	BNC 75 Ω
Gender	male

Electrical

Contact resistance	≤ 3 m Ω (inner)
Contact resistance	≤ 2 m Ω (outer)
Dielectric strength	1.5 kVdc
Impedance	75 Ω
Insulation resistance	> 5 G Ω
Rated voltage	< 50 V
VSWR	≤ 1.06 / > 30 dB up to 6 GHz ≤ 1.13 / > 24 dB up to 12 GHz ≤ 1.22 / > 20 dB up to 18 GHz

Mechanical

Cable O.D.	4.3 mm mm
Cable retention	> 30 N (center)
Crimp size	7.36 Hex crimp (shield)
Crimp size (pin)	1.6
Insertion force	< 25 N
Lifetime	> 1000 mating cycles
Locking device	Bayonett
Cable anchoring	Jacket crimping

Material

Contacts	Brass (CuZn35Pb2), 0.2 μ m AuCo
Shell	Brass (CuZn39Pb3)
Shell plating	Antraloy

Insert

PP

Environmental

Temperature range

- 30 °C to +85 °C

Contact crimpability

Complies with IEC 60803 and IEC 60352-2

Accessories

BST-BNC-*



CAS-BNC-T



CS-BNC-RT



HX-R-BNC



DIE-R-BNCX-PU

