

Type: **EASY512-AC-RCX**Article No.: **274105**

### Ordering information


Relay outputs		Quantity	6
Power supply		V DC	115/230 V AC

### Description

- 8 digital inputs
- 6 relay outputs
- Screw terminals
- Timer

### Notes concerning the product group

Backup of real-time clock (only for appropriate devices)

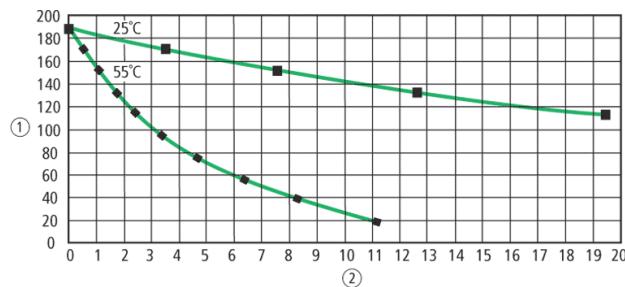

① Backup time (hours)

② Operating time (years)

General			
Standards			EN 55011, EN 55022, IEC/EN 61000–4, IEC 60068–2–6, IEC 60068–2–27
Dimensions (W × H × D)		mm	71.5 × 90 × 58 (4 PE)
Weight		kg	0,2
Mounting	Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4–101–GF1 (accessories)		
Terminal capacities			
Solid		mm <sup>2</sup>	0.24 (AWG 22 – 12)
Flexible with ferrule		mm <sup>2</sup>	0.22.5 (AWG 22 – 12)
Standard screwdriver		mm	3.5 × 0.8
Max. tightening torque		Nm	0,6
Climatic environmental conditions			
Operating ambient temperature		°C	–25 to 55, cold as per IEC 60068–2–1, heat as per IEC 60068–2–2
Condensation			Take appropriate measures to prevent condensation
LCD display (clearly legible)		°C	055
Storage		°C	–40/+70
Relative humidity, non-condensing (IEC/EN 60068–2–30)		%	5 – 95
Air pressure (operation)		hPa	795 – 1080
Corrosion resistance			
IEC/EN 60068–2–42	4 days SO <sub>2</sub>	cm <sup>3</sup> /m <sup>3</sup>	10
IEC/EN 60068–2–43	4 days H <sub>2</sub> S	cm <sup>3</sup> /m <sup>3</sup>	1
Ambient conditions, mechanical			
Pollution degree			2
Degree of protection (IEC/EN 60529)			IP 20
Vibrations (IEC/EN 60068–2–6)			
Constant amplitude 0.15 mm		Hz	10 – 57
Constant acceleration 2 g		Hz	57 – 150
Mechanical shock resistance (IEC/EN 60068–2–27) semi-sinusoidal 15 g/11 ms		Impacts	18
Drop to IEC/EN 60068–2–31	Drop height	mm	50
		m	1

Free fall, packaged (IEC/EN 60068-2-32)			
Mounting position			horizontal/vertical
<b>Electromagnetic compatibility (EMC)</b>			
Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)			
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (IEC/EN 61000-4-3, RFI)		V/m	10
Radio interference suppression (EN 55011)			EN 55011 Class B, EN 55022 Class B
Burst pulses (IEC/EN 61000-4-4, level 3)			
Supply cables		kV	2
Signal lines		kV	2
High-energy pulses (surge) (IEC/EN 61000-4-5)		kV	2 (supply cables, symmetrical, EASY...AC)
High-energy pulses (surge) (IEC/EN 61000-4-5, level 2)		kV	0.5 (supply cables, symmetrical, EASY...DC)
Immunity to line-conducted interference to (IEC/EN 61000-4-6)		V	10
<b>Insulation resistance</b>			
Clearance in air and creepage distances			EN 50178, UL 508, CSA C22.2, no. 142
Insulation resistance			EN 50178
<b>Backup/accuracy of the real-time clock</b>			
Accuracy of the real-time clock			typ. $\pm 5$ ( $\pm 0.5$ annually)
<b>Repetition accuracy of timing relays</b>			
Accuracy of timing relays (of values)		%	$\pm 1$
Resolution			
Range "S"		ms	10
Range "M:S"		s	1
Range "H:M"		min	1
<b>Retentive memory</b>			
Write cycles of the retentive memory			1000000 ( $10^6$ )
<b>Power supply</b>			
Rated operational voltage	$U_e$	V	100/110/115/120/230/240 AC (+10/-15 %)

Admissible range		V AC	85 – 264
Frequency		Hz	5060 ( $\pm$ 5%)
Input current			
at 115/120 V AC 60 Hz		mA	Normally 40
at 230/240 V AC 50 Hz		mA	Normally 20
Voltage dips (IEC/EN 61131–2)		ms	20
Power loss			
at 115/120 V AC		VA	Normally 5
at 115/230 V AC		VA	Normally 5

### Digital inputs 115/230 V AC

Number			8
Status indication			LCD–display (if present)
Potential isolation			
From power supply			No
Between digital inputs			No
From the outputs			Yes
Rated voltage L (sinusoidal)			
On 0 signal		V AC	0 – 40
On 1 signal		V AC	79 – 264
Rated frequency		Hz	50 – 60
Input current on 1 signal			
I1 to I6		mA	6 $\times$ 0.25 (at 115 V AC, 60 Hz) 6 $\times$ 0.5 (at 230 V AC, 50 Hz)
I7 to I8		mA	2 $\times$ 4 (at 115 V AC, 60 Hz) 2 $\times$ 6 (at 230 V AC, 50 Hz)
Delay time			
Delay time (0 – 1/1 – 0) I1 to I6, I9 to I12, R1 to R12			
Debounce ON 50/60 Hz		ms	8066
Debounce OFF 50/60 Hz		ms	2016
Delay time I7, I8 (1 – 0)			
Debounce ON 50/60 Hz		ms	160150
Debounce OFF 50/60 Hz		ms	100100
Delay time I7, I8 (0 – 1)			
Debounce ON 50/60 Hz		ms	8066
Debounce OFF 50/60 Hz		ms	2016
Max. admissible cable length (per input)			
I1 to I6		m	40

I7, I8		m	Normally100
<b>Relay outputs</b>			
Number			4
Outputs in groups of			1
Parallel switching of outputs for increased output			Not permissible
Protection of an output relay			Miniature circuit-breaker B16 or fuse 8 A (slow)
Potential isolation			
From power supply			Yes
From the inputs			Yes
From the PC interface, memory card NET network, EASY-Link			No
Safe isolation		V AC	300
Basic insulation		V AC	600
Lifespan, mechanical	Operations	$\times 10^6$	10
Contacts			
Conventional thermal current (10 A UL)		A	8
Recommended for load: 12 V AC/DC		mA	> 500
Short-circuit-proof $\cos \phi = 1$ , characteristic B16 at 600 A		A	16
Short-circuit-proof $\cos \phi = 0.5$ to 0.7, characteristic B16 at 900 A		A	16
Rated impulse withstand voltage $U_{imp}$ of contact coil		kV	6
Rated operational voltage	$U_e$	V AC	250
Rated insulation voltage	$U_i$	V AC	250
Safe isolation to EN 50178 between coil and contact		V AC	300
Safe isolation to EN 50178 between 2 contacts		V AC	300
Making capacity			
AC-15, 250 V AC, 3 A (600 Ops./h)	Operations		300000
DC-13 L/R 150 ms 24 V DC, 1 A (500 Ops./h)	Operations		200000
Breaking capacity			
AC-15, 250 V AC, 3 A (600 Ops./h)	Operations		300000
	Operations		200000

DC–13 L/R 150 ms 24 V DC, 1 A (500 Ops./h)			
Filament bulb load			
1000 W at 230/240 V AC	Operations	25000	
500 W at 115/120 V AC	Operations	25000	
Fluorescent lamp load			
Fluorescent lamp load 10 × 58 W at 230/240 V AC			
With upstream electrical device	Operations	25000	
Uncompensated	Operations	25000	
Fluorescent lamp load 1 × 58 W at 230/240 V AC, conventional, compensated	Operations	25000	
Switching frequency			
Mechanical operations	× 10 <sup>6</sup>	10	
Switching frequency	Hz	10	
Resistive load/lamp load	Hz	2	
Inductive load	Hz	0,5	
UL/CSA			
Uninterrupted current at 240 V AC	A	10	
Uninterrupted current at 24 V DC	A	8	
AC			
Control Circuit Rating Codes (utilization category)		B 300 Light Pilot Duty	
Max. rated operational voltage	V AC	300	
Max. thermal uninterrupted current = 1 at B 300	A	5	
Max. make/break capacity 1 at B 300	VA	3600360	
DC			
Control Circuit Rating Codes (utilization category)		R 300 Light Pilot Duty	
Max. rated operational voltage	V DC	300	
Max. thermal uninterrupted current at R 300	A	1	
Max. make/break capacity at R 300	VA	2828	


## Notes

## Dimensions

## Notes

For additional Technical Data EASY5... and EASY7... → AWB2528–1508GB,

## Dimensions

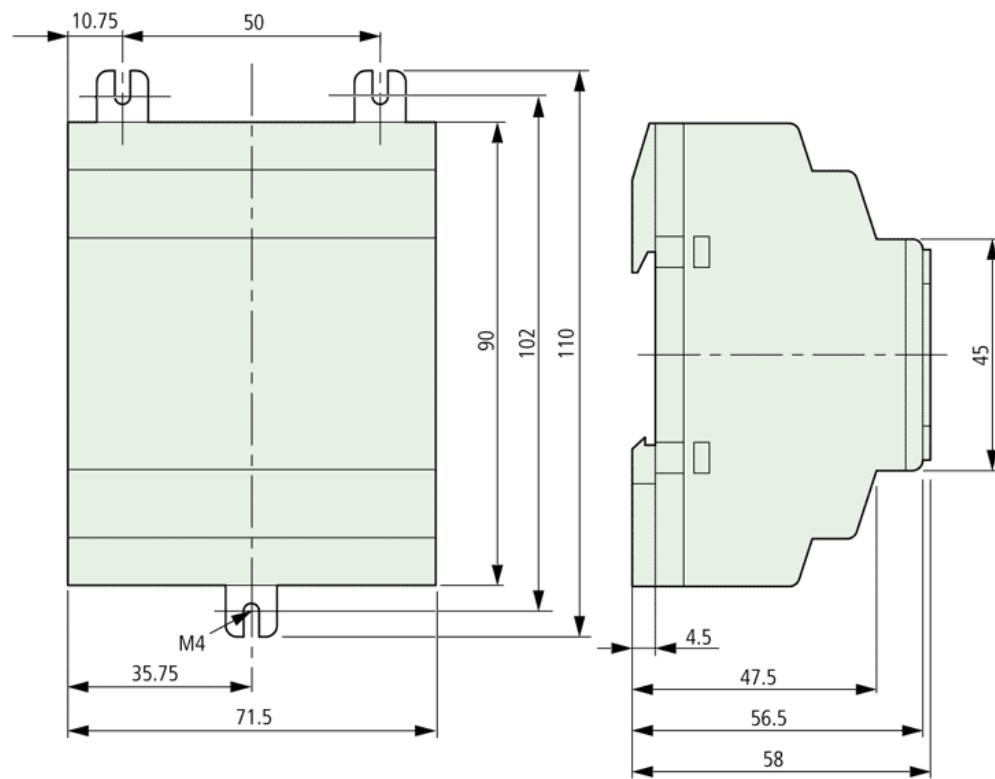

---

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn  
E-Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net  
Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3