
FD-11605 Specifications

2022-07-11



Contents

FD-11605 Specifications..... 3

FD-11605 Specifications

Conditions

Specifications are typical and valid from -40 °C to +85 °C unless otherwise noted.

Input Characteristics

Number of channels	8 analog input channels	
Isolation	Galvanic isolation between channels and to chassis	
Input voltage range (AI+ to AI-)	$\pm 60\text{ V}$, $\pm 16\text{ V}$	
Minimum input overrange		
60 V range		6%
16 V range		13%
ADC resolution	24 bits	
Type of ADC	Delta-Sigma (with analog prefiltering)	
Sample mode	Simultaneous	
Timebases (f_M)^[1]		
Frequency	13.1072 MHz, 12.8 MHz, 12.288 MHz, 10.24 MHz	
Accuracy	± 30 ppm maximum	

Sampled data rate range (f_s)	
Minimum	500 Sample/s
Maximum	102.4 kSample/s
Sampled data rates (f_s)	Refer to the following table for sample data rates supported for each timebase

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
102.4	100.0	96.0	80.0
51.2	50.0	48.0	40.0
34.133	33.333	32.0	26.667
25.6	25.0	24.0	20.0*
20.48	20.0	19.2	16.0
17.067	16.667	16.0*	13.333
12.8	12.5	12.0	10.0*
10.24	10.0	9.6	8.0
8.533	8.333	8.0*	6.667
6.4	6.25	6.0	5.0*
5.12	5.0	4.8	4.0
4.267	4.167	4.0*	3.333
3.2	3.125	3.0	2.5*
2.56	2.5	2.4	2.0
2.133	2.083	2.0*	1.667
1.6	1.563	1.5	1.25*
1.28	1.25	1.2	1.0
1.067	1.042	1.0*	0.833
0.8	0.781	0.75	0.625
0.64	0.625	0.6	0.5

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
-------------	----------	------------	-----------

Note: For sample rates that can be obtained using two different timebases, the lowest noise (highest resolution) option is indicated with an asterisk (*).

Table 1. Timebases (f_M) and Supported Sampled Data Rates (f_S), (kSamples/s)

Input impedance (AI+ to AI-)	>1.1 M Ω
------------------------------	-----------------

Nominal Input Range	Temperature	Gain Error (% of Reading)	Offset Error (% of Range, mV)
± 60 V	5 °C to 40 °C	0.039%, typical	0.0012%, 0.72 mV, typical
		0.089%, maximum	0.0043%, 2.6 mV, maximum
	-40 °C to 85 °C	0.181%, maximum	0.01%, 6.0 mV, maximum
± 16 V	5 °C to 40 °C	0.043%, typical	0.0015%, 0.24 mV, typical
		0.096%, maximum	0.0075%, 1.2 mV, maximum
	-40 °C to 85 °C	0.204%, maximum	0.018%, 2.9 mV, maximum

Table 2. Accuracy

Sampled data rate noise	
1 kSample/s	
60 V	41 μ V RMS
16 V	15 μ V RMS
10 kSample/s	
60 V	89 μ V RMS
16 V	38 μ V RMS
102.4 kSample/s	
60 V	285 μ V RMS


16 V	120 μ V RMS
Stability	
Gain drift	
60 V	± 9 ppm/ $^{\circ}$ C
16 V	± 11 ppm/ $^{\circ}$ C
Offset drift	
60 V	± 26 μ V/ $^{\circ}$ C
16 V	± 13 μ V/ $^{\circ}$ C
Crosstalk (1 kHz)	-90 dB
CMRR to chassis/earth ($f_{in} = 60$ Hz)	95 dB
Spurious Free Dynamic Range (SFDR), (1 kHz, -60 dBFS)	130 dBFS
Total Harmonic Distortion (THD), (1 kHz, 8.91 V pk)	-90 dB

Filtering

Brickwall filter (default)	
Input delay	$36/f_s + 2.3 \mu$ s
Input delay tolerance	± 400 ns
Passband frequency	DC to $0.4 \cdot f_s$

Stopband frequency	At or above $0.5 \cdot f_s$
Stopband rejection	≥ 100 dB
Alias-free bandwidth	$0.5 \cdot f_s$

Figure 1. Brickwall Filter Magnitude Response

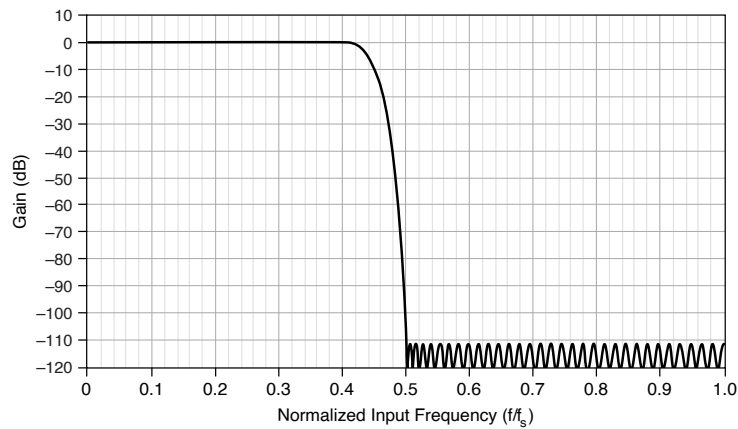

Butterworth filter

Input delay Refer to the **Butterworth Filter Input Delay for Available Timebases (f_M)** table.

Input delay tolerance ± 400 ns

Filter order 2nd or 4th order

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
4096 Hz	4000 Hz	3840 Hz	3200 Hz
2048 Hz	2000 Hz	1920 Hz	1600 Hz
1024 Hz	1000 Hz	960 Hz	800 Hz
512 Hz	500 Hz	480 Hz	400 Hz
256 Hz	250 Hz	240 Hz	200 Hz

13.1072 MHz	12.8 MHz	12.288 MHz	10.24 MHz
128 Hz	125 Hz	120 Hz	100 Hz

Table 3. Butterworth Filter Cutoff Frequencies (-3 dB Point) for Available Timebases



Note Input delay is the delay for signal frequencies much lower than the cutoff frequency. Maximum input delay is the peak delay at high signal frequency. The following figures depict how the input delay varies with signal frequency. Refer to the **FD-11605 User Guide** for more information.

Figure 2. Butterworth Filter Input Delay (2nd Order, with 12.8 MHz Timebase, 4 kHz, 2 kHz, 1 kHz Filter)

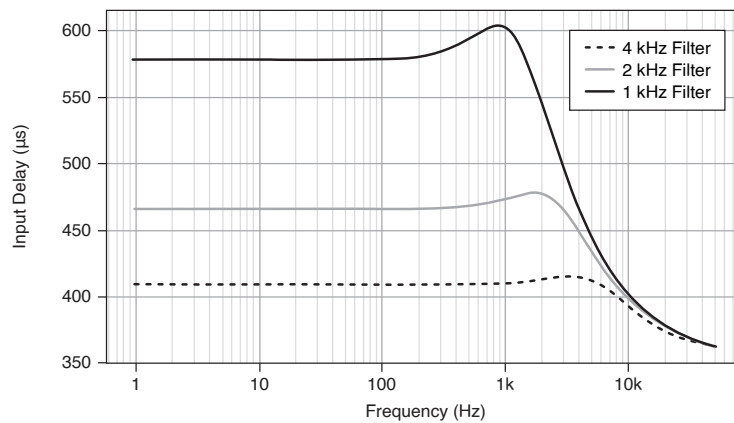


Figure 3. Butterworth Filter Input Delay (2nd Order, with 12.8 MHz Timebase, 500 Hz, 250 Hz, 125 Hz Filter)

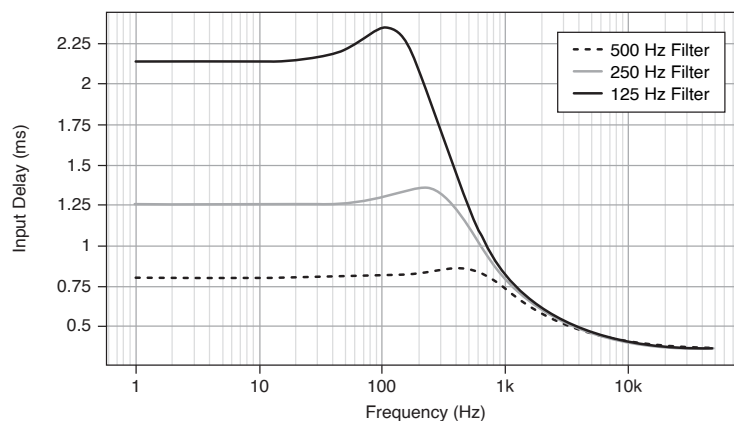


Figure 4. Butterworth Filter Input Delay (4th Order, with 12.8 MHz Timebase, 4 kHz, 2 kHz, 1 kHz Filter)

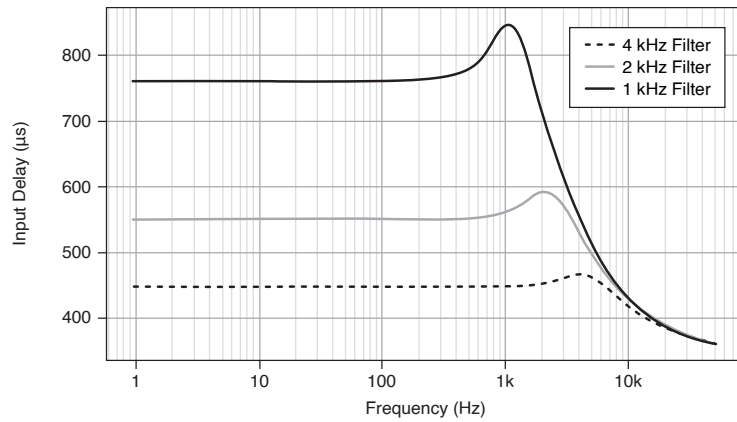


Figure 5. Butterworth Filter Input Delay (4th Order, with 12.8 MHz Timebase, 500 Hz, 250 Hz, 125 Hz Filter)


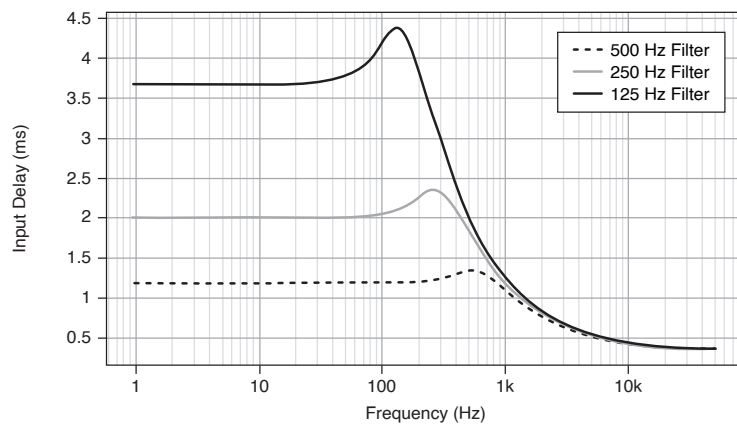



Figure 6. Butterworth Filter Magnitude Response (4th Order, with 12.8 MHz Timebase)

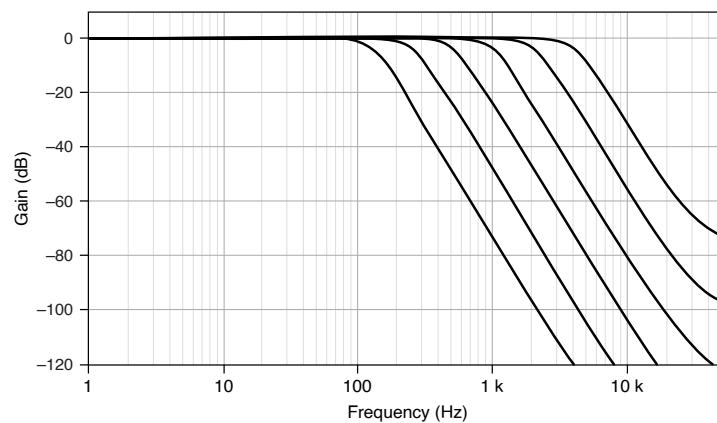

Comb filter

Input delay	$5/f_s + 2.3 \mu\text{s}$
Input delay tolerance	$\pm 400 \text{ ns}$
Notches	$f_s, 2 f_s, 3 f_s, \dots$

Figure 7. Comb Filter Magnitude Response

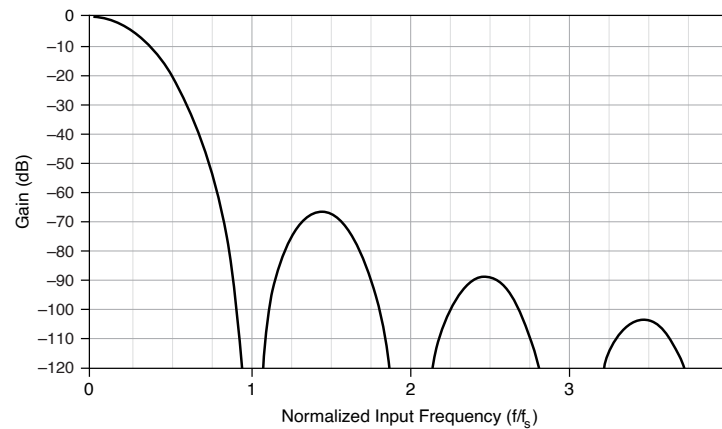

Time-Based Triggers

Type	Start Trigger, Sync Pulse
------	---------------------------

Timing and Synchronization

Protocol	IEEE 802.1AS for network synchronization over 1000 Base-TX, full-duplex
Network synchronization accuracy ^[2]	<1 μs
Network synchronization accuracy with optimized configuration ^[3]	<100 ns



Note When configured to use IEEE 1588, performance of synchronization may vary from these specifications.

Network Interface

Network protocols	TCP/IP, UDP
Network ports used	HTTP:80 (configuration only), TCP:3580; UDP:5353 (configuration only), TCP:5353 (configuration only); TCP:31415; UDP:7865 (configuration only), UDP:8473 (configuration only)
Network IP configuration	DHCP + Link-Local, DHCP, Static, Link-Local
Default MTU size	1500 bytes

Ethernet

Number of ports	2 8-pin X-coded M12 ports, internally switched ^[4]
Network interface	1000 Base-TX, full-duplex; 1000 Base-TX, half-duplex; 100 Base-TX, full-duplex; 100 Base-TX, half-duplex; 10 Base-T, full-duplex; 10 Base-T, half-duplex
Communication rates	10/100/1000 Mbps, auto-negotiated
Maximum cabling distance	100 m/segment
Maximum hops per line ^[5]	15

Power Requirements



Notice The protection provided by the FD-11605 can be impaired if it is used in a manner not described in the **FD-11605 User Guide** .

Voltage input range	
V_{in}	9 V DC to 30 V DC
V_{aux}	Up to 30 V DC
Maximum device power consumption ^[6]	6 W
Power input connector	5-pin L-coded male M12 connector
Power output connector	5-pin L-coded female M12 connector

Current Limits



Caution Exceeding the current limits may cause damage to the device. Stay below a maximum of 10 A shared between both Input and Aux terminals.

Power IN/OUT terminals	
V_{in}	10 A maximum
V_{aux}	10 A maximum total (combined with V_{in})
Recommended external overcurrent protection	16 A, slow blow fuse

Physical Characteristics

Dimensions	198.5 mm × 77.4 mm × 47.1 mm (7.8 in. × 3.0 in. × 1.9 in.)
Weight	1.2 kg (42 oz)
Input connection	
Number	8
Type	4-pin A-coded male M12 connectors
Torque for M12 connectors (power, Ethernet, input connections)	0.6 N · m (5.31 lb · in.)

Calibration

Calibration interval	1 year
----------------------	--------

Environmental Characteristics

Temperature and Humidity

Refer to the **FD-11605 User Guide** for more information about meeting these specifications.

Temperature	
Operating	-40 °C to 85 °C
Storage	-40 °C to 100 °C

Operating and storage humidity	Up to 100% relative humidity, condensing or noncondensing
Ingress protection	IP65/IP67
Pollution Degree	4
Maximum altitude	5,000 m



Note Failure to follow the mounting instructions in the **FD-11605 User Guide** can cause temperature derating.



Note M12 connectors must be mated to cables or have caps installed on them to meet IP65/IP67 requirements. Cover the unused connectors with the included plastic caps or optional metal caps whenever water, dust, or dirt are present.



Note Avoid long periods of exposure to sunlight.

Shock and Vibration

Operating vibration

Random 10 g RMS, 5 Hz to 2,000 Hz

Sinusoidal 10 g, 20 Hz to 2,000 Hz

12.4 mm minimum pk-pk displacement, 5 Hz to 20 Hz

Operating shock	100 g, 11 ms half sine, 3 shocks at 6 orientations, 18 total
	40 g, 6 ms half sine, 4,000 shocks at 6 orientations, 24,000 total

Environmental Standards

This product meets the requirements of the following environmental standards for electrical equipment.

- IEC 60068-2-1 Cold
- IEC 60068-2-2 Dry heat
- IEC 60068-2-6 Sinusoidal operating vibration
- IEC 60068-2-27 Operating shock
- IEC 60068-2-30 Damp heat cyclic (12 + 12h cycle)
- IEC 60068-2-64 Random operating vibration



Note To verify marine approval certification for a product, refer to the product label or visit ni.com/product-certifications and search for the certificate.

Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-channel isolation

Nominal working voltage ^[7]	60 V DC (Dry/Wet Locations)
Maximum working voltage	100 V DC (Dry/Wet Locations)
Transient overvoltage ^[8]	1,000 V RMS, verified by 5 s withstand

Channel-to-earth ground isolation

Nominal working voltage	60 V DC (Dry/Wet Locations)
Maximum working voltage	100 V DC (Dry/Wet Locations)

Transient overvoltage	1,000 V RMS, verified by 5 s withstand
Overvoltage protection ^[9]	±100 V between any two pins on the analog input connector

These test and measurement circuits are **not** rated for measurements performed on circuits directly connected to the electrical distribution system referred to as MAINS.

MAINS is a hazardous live electrical supply system to which equipment is designed to be connected to for the purpose of powering equipment. This product is rated for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

Warning Do not connect the FD-11605 to signals or use for measurements within Measurement Categories II, III, or IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category II, III, or IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation. The product can only withstand transients up to the transient overvoltage rating without breakdown or damage to the insulation. An analysis of the working voltages, loop impedances, temporary overvoltages, and transient overvoltages in the system must be conducted prior to making measurements.

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility Standards

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Industrial immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-003: Class A emissions



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Notice For EMC declarations and certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.



Note To ensure the specified EMC performance, operate this product only with shielded Ethernet cables.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)

Product Certifications and Declarations


Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management


NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the **Engineering a Healthy Planet** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  Waste Electrical and Electronic Equipment (WEEE)—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法 (中国 RoHS)

-    中国 RoHS— NI 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 NI 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

¹ Base clocks can be synchronized with other FieldDAQ devices as well as CompactDAQ, CompactRIO, and other devices that support TSN network synchronization.

² I/O synchronization is system-dependent. Assumes the devices are connected in a line topology. For information about network synchronization accuracy, visit ni.com/info and enter Info Code syncacc.

³ I/O synchronization is system-dependent. Assumes a system containing one hop. For information about achieving high accuracy synchronization, visit ni.com/info and enter Info Code fdsync.

⁴ This allows for line topologies or network redundancy.

⁵ With default software configuration. For information about creating reliable Ethernet-based systems, visit ni.com/info and enter Info Code fdenet.

⁶ The total amount of power drawn by the device from the power input connector.

⁷ Working voltage rating is the highest RMS value of the AC or DC voltage across the insulation that can continuously occur when the equipment is supplied at rated voltage.

⁸ Withstand rating is the highest RMS value of the AC or DC voltage the insulation can withstand without flashover or breakdown for a specified time.

⁹ Temporary overvoltage rating is the overvoltage of relatively long duration.