


**RoHS
Compliant**

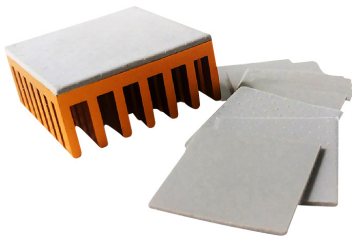


Features

- High thermal conductivity
- Low thermal impedance
- Good electrical insulation


Applications

Electronic Components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.

Properties

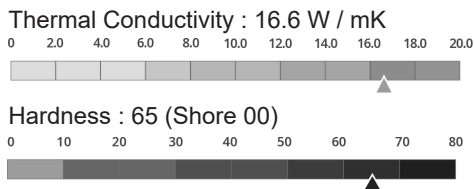

Contact Pressure, Thermal Impedance, and Deflection

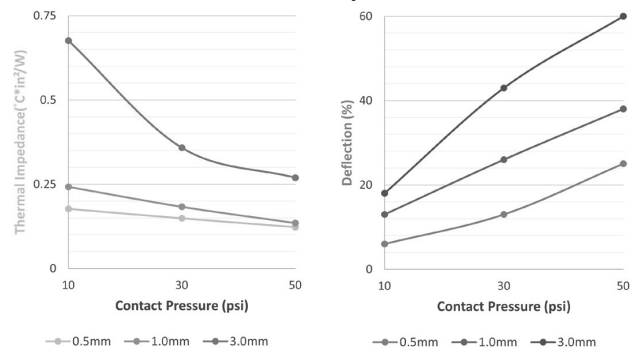

Properties	Unit	MPTG-A1660	Tolerance	Test Method
Thermal Conductivity	W / mK	16.6	±10%	ASTM D5470 Modified
Thickness	mm	0.5~2	-	ASTM D374
	inch	0.0197~0.0787	-	ASTM D374
Colour	-	Dark Gray	-	Colorimeter CIE 1976
Flame Rating	-	V-0	-	UL 94
Dielectric Breakdown Voltage	kV / mm	≥7	-	ASTM D149
Weight Loss	%	<1	-	ASTM E595 Modified
Density	g / cm ³	3.6	±5%	ASTM D792
Operating Temperature	°C	-50 to +180	-	-
Volume Resistance	Ohm-m	5×10 ¹²	-	ASTM D257
Elongation	%	20	-	ASTM D412
Standard Format	-	Sheet	-	-
Hardness	Shore 00	65	±10	ASTM D2240

- For thicknesses less than 1mm, hardness will be adjusted to 50-75 Shore OO to facilitate effective removal of liner during production
- Different tolerances according to the selected thickness
- Die-cut for different shapes

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

Part Number Table

Description	Part Number
Ultra Soft Thermal Pad, Dark Gray, 150mm × 150mm × 1.0mm	MP-TG-A1660-150-1.0
Ultra Soft Thermal Pad, Dark gray, 120mm × 120mm × 0.5mm	MP-TG-A1660-120-0.5

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.